

FILED / PRODUIT

Date: October 21, 2022
CT- 2022-002

CT-2022-002

Annie Ruhlmann for / pour
REGISTRAR / REGISTRAIRE

THE COMPETITION TRIBUNAL

OTTAWA, ONT.

491

IN THE MATTER OF the *Competition Act*, R.S.C. 1985, c. C.34;

AND IN THE MATTER OF the proposed acquisition by Rogers Communications Inc. of Shaw Communications Inc.;

AND IN THE MATTER OF an application by the Commissioner of Competition for one or more orders pursuant to section 92 of the *Competition Act*.

B E T W E E N:

COMMISSIONER OF COMPETITION

Applicant

- and -

**ROGERS COMMUNICATIONS INC. and
SHAW COMMUNICATIONS INC.**

Respondents

- and -

**ATTORNEY GENERAL OF ALBERTA
and VIDEOTRON INC.**

Intervenors

WITNESS STATEMENT OF EVAN FUEST

I, EVAN FUEST, of the City of Suffern, in the state of New York, MAKE OATH

AND SAY:

1. I am a Certified Computer Forensic Engineer with Consilio LLC ("**Consilio**") in its Digital Forensics and Expert Services Group. Consilio is a global leader in eDiscovery, document review, risk management, and legal consulting services. Since 2013, I have held similar forensic roles with Consilio, and its affiliate entities, Xact Data Discovery and RVM Enterprises. As a forensic engineer, I have performed hundreds of digital forensics

investigations and reviews while, since 2004, maintaining an extensive career in Information Technology.

2. I swear this Witness Statement in connection with an Application commenced by the Commissioner of Competition for one or more Orders blocking the proposed transaction among Shaw Communications Inc. ("**Shaw**"), Rogers Communications Inc. and Videotron Ltd.

A. EDUCATION AND WORK HISTORY

3. I have spent nearly my entire professional career in the information technology and computer forensics fields, including, for the past 11 years, as a Certified Computer Forensic Engineer.

4. I have significant training in the computer forensics and information technology fields, having completed training programs offered by some of the most renowned companies in the industry, including Access Data, Kcura Software, Microsoft and VMware. I have also achieved the designations of Certified AccessData Examiner, Certified Cellebrite Logical Operator and I am certified in Comptia A+ and Relativity E-Discovery.

5. As noted above, since 2013, I have held forensic roles with Consilio, and its affiliated entities, Xact Data Discovery and RVM Enterprises. In my role at Consilio, I have responsibility for project management of digital forensic and data collection projects, overseeing laboratory operations, personnel and equipment and personally assisting on projects.

6. Since 2013, I have conducted hundreds of digital evidence collections and computer forensic examinations. I regularly provide peer review to other Computer Forensic Examiners in connection with their own digital evidence collections and investigations.

7. Prior to obtaining my designation as a Certified Computer Forensic Engineer, I worked in the information technology field designing, administrating and facilitating complex data systems.

8. A copy of my CV is attached to my Witness Statement as [REDACTED]

B. FORENSIC ANALYSIS OF SHAW EMAILS IN THE COMMISSIONER'S LIST OF DOCUMENTS

9. In connection with this proceeding, Consilio has provided Shaw with eDiscovery services and support, including document processing, hosting and related document management. Since 2021, I have been involved with the identification, collection, analysis, export and logging of data from Shaw's Office 365 service suite, including email and Office offerings.

10. I have been asked by Shaw to undertake a forensic investigation of the email messages produced by Shaw in the course of this proceeding that are included on the Commissioner's List of Documents dated October 7, 2022 (the "LOD") for the purpose of identifying emails that were never sent and remain in draft form. A copy of the LOD used in the course of my review is attached to my Witness Statement as [REDACTED]

11. The LOD lists a total of [REDACTED] documents produced by Shaw, Rogers and the Commissioner, among other parties. To facilitate my review and investigation, a Consilio

Project Manager first isolated the [REDACTED] emails produced by Shaw that are contained in the LOD. I am advised by the Consilio Project Manager that the following steps were taken to isolate this sub-set of documents:

- (a) *first*, applying an External BegDoc prefix filter to the [REDACTED] documents in the LOD to narrow the set of documents to only those with an External BegDoc prefix of “SJRB”, denoting a document that was produced by Shaw. This generated a sub-set of [REDACTED] documents; and
- (b) *second*, narrowing the set of [REDACTED] documents to only emails by filtering to only include those records with the file type of “email”. This generated a the final sub-set of [REDACTED] documents for my review.

12. After the sub-set of [REDACTED] Shaw emails were identified by the Consilio Project Manager, these documents were exported from Relativity in their Native format (*i.e.*, a production of files from their source location in their source format) for me to use during my investigation. A copy of the list of the [REDACTED] Shaw emails that I reviewed in the course of my investigation is attached to my Witness Statement as [REDACTED]

13. As a first step in my forensic analysis, I used industry standard forensic tools, including X-Ways Forensics v22.3 and Access Data’s Forensic Tool Kit v. 7.5 (FTK), to investigate the [REDACTED] Shaw emails. Using these forensic tools, I processed and examined the metadata stored as part of the [REDACTED] Shaw emails and was able to identify a subset of documents that contain metadata indicating that they are unsent or otherwise in a “draft” format. In particular, I reviewed the metadata stored as part of the “Exchange Server Protocols Master Property List” to identify metadata fields indicating an email was created

but not sent. To the extent that each email file contained this information, the primary metadata I relied on in the course of my investigation were:

- (a) the “unsent” field, which indicates whether it is “true” or “false” that an email was sent (or not); and
- (b) data in the header of the email that would indicate whether an email has passed through an email server (either sent or received) and was stamped by that server.

14. The criteria that I used to identify draft, or unsent emails, was: (i) emails whose metadata included an “unsent” field that is “true”; and (ii) where the data in the header of the email did not indicate that it was stamped as it transited through a server as parsed by FTK and X-Ways. I then manually examined each of the emails that were identified as drafts, using the Exchange Server Protocols Master Property List, to verify the results generated by the forensics programs used in my investigation. A copy of the Exchange Server Protocols Master Property List is attached to my Witness Statement as **Exhibit “4”**.

C. UNSENT EMAILS IDENTIFIED IN THE COMMISSIONER’S LIST OF DOCUMENTS

15. Through my analysis of the sub-set of [REDACTED] emails produced by Shaw, I identified [REDACTED] emails whose metadata suggested that they were created, but were not sent by the custodian.

16. As a second step in my forensic analysis, within this smaller sub-set of [REDACTED] emails, I continued my investigation to identify: (i) emails that were collected from a custodian’s

draft folder in their inbox; (ii) items that are “draft-like” in that they may have been created in an email inbox, but functionally would not be part of a send or receive action unless otherwise attached to a parent email (e.g., email contacts, notes and other standalone files); and (iii) emails whose location and metadata is consistent with a discarded draft. Discarded drafts are typically generated when a custodian declined the notification “are you sure you want to discard this draft?”, resulting in a draft email bypassing the trash and going directly into the “recoverable items” folder.

17. As a result of my forensic analysis of the [REDACTED] emails, I identified:

- (a) [REDACTED] email that was collected from the custodian’s draft folder;
- (b) [REDACTED] email items that are “draft-like” in that they contain content that is automatically generated and used by the email server itself; and
- (c) [REDACTED] email drafts stored in the recoverable items folder.

18. Based on my forensic analysis, these [REDACTED] email items were never sent by the custodians from whom they were collected. A list of these [REDACTED] emails is attached to my Witness Statement as [REDACTED]

SWORN remotely by Evan Fuest of the City of Suffern, in the state of New York, before me at the City of Toronto, in the Province of Ontario this 20th day of October 2022 in accordance with O. Reg. 430/20 Administering Oath or Declaration Remotely


Alisa McMaster

Commissioner for Taking Affidavits
ALISA MCMASTER



EVAN FUEST

This is Exhibit "1" referred to in the Witness Statement of EVAN FUEST sworn by EVAN FUEST of the City of Suffern, in the State of New York, before me at the City of Toronto, in the Province of Ontario, on October 20, 2022 in accordance with O. Reg. 431/20, Administering Oath or Declaration Remotely.

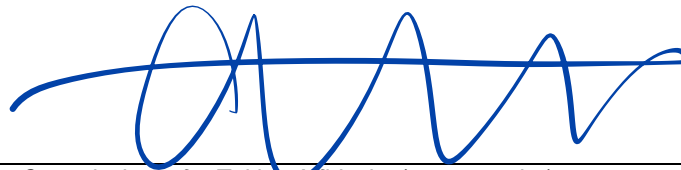


Commissioner for Taking Affidavits (or as may be)

ALISA MCMASTER

PUBLIC

PUBLIC

This is Exhibit "2" referred to in the Witness Statement of EVAN FUEST sworn by EVAN FUEST of the City of Suffern, in the State of New York, before me at the City of Toronto, in the Province of Ontario, on October 20, 2022 in accordance with O. Reg. 431/20, Administering Oath or Declaration Remotely.

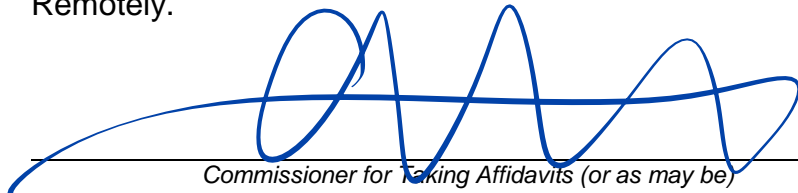

Commissioner for Taking Affidavits (or as may be)

ALISA MCMASTER

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC

PUBLIC


This is Exhibit "3" referred to in the Witness Statement of EVAN FUEST sworn by EVAN FUEST of the City of Suffern, in the State of New York, before me at the City of Toronto, in the Province of Ontario, on October 20, 2022 in accordance with O. Reg. 431/20, Administering Oath or Declaration Remotely.



Commissioner for Taking Affidavits (or as may be)

ALISA MCMASTER

This is Exhibit "4" referred to in the Witness Statement of EVAN FUEST sworn by EVAN FUEST of the City of Suffern, in the State of New York, before me at the City of Toronto, in the Province of Ontario, on October 20, 2022 in accordance with O. Reg. 431/20, Administering Oath or Declaration Remotely.

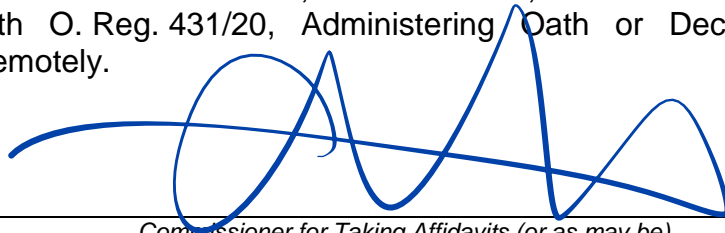A handwritten signature in blue ink, consisting of several loops and a long horizontal stroke, positioned above a solid black horizontal line.

Commissioner for Taking Affidavits (or as may be)

ALISA MCMASTER

[MS-OXPROPS]: Exchange Server Protocols Master Property List

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
04/25/2008	0.2		Revised and updated property names and other technical content.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Updated references to reflect date of initial release.
09/03/2008	1.02		Changed title of document.
10/01/2008	1.03		Revised and edited technical content.
12/03/2008	1.04		Revised and edited technical content.
02/04/2009	1.05		Revised and edited technical content.
03/04/2009	1.06		Revised and edited technical content.
04/10/2009	2.0		Updated technical content and applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.
11/04/2009	4.0.0	Major	Updated and revised the technical content.
02/10/2010	5.0.0	Major	Updated and revised the technical content.
05/05/2010	6.0.0	Major	Updated and revised the technical content.
08/04/2010	7.0	Major	Significantly changed the technical content.

Contents

1	Introduction	27
1.1	Glossary	27
1.2	References	30
1.2.1	Normative References	30
1.2.2	Informative References	33
1.3	Overview	33
1.3.1	Common Message Classes	34
1.3.2	Commonly Used Property Sets	35
1.3.3	Property ID Ranges	36
1.3.4	WebDAV Property Naming	37
1.3.4.1	http://schemas.microsoft.com/mapi/proptag Namespace	37
1.3.4.2	http://schemas.microsoft.com/mapi/id Namespace	38
1.3.4.3	http://schemas.microsoft.com/mapi/string Namespace	38
1.4	Relationship to Protocols and Other Structures	38
1.5	Applicability Statement	38
1.6	Versioning and Localization	39
1.7	Vendor-Extensible Fields	39
2	Structures	40
2.1	PidLidAddressBookProviderArrayType	40
2.2	PidLidAddressBookProviderEmailList	40
2.3	PidLidAddressCountryCode	40
2.4	PidLidAgingDontAgeMe	41
2.5	PidLidAllAttendeesString	41
2.6	PidLidAllowExternalCheck	41
2.7	PidLidAnniversaryEventEntryId	41
2.8	PidLidAppointmentAuxiliaryFlags	42
2.9	PidLidAppointmentColor	42
2.10	PidLidAppointmentCounterProposal	42
2.11	PidLidAppointmentDuration	43
2.12	PidLidAppointmentEndDate	43
2.13	PidLidAppointmentEndTime	44
2.14	PidLidAppointmentEndWhole	44
2.15	PidLidAppointmentLastSequence	44
2.16	PidLidAppointmentMessageClass	45
2.17	PidLidAppointmentNotAllowPropose	45
2.18	PidLidAppointmentProposalNumber	45
2.19	PidLidAppointmentProposedDuration	46
2.20	PidLidAppointmentProposedEndWhole	46
2.21	PidLidAppointmentProposedStartWhole	46
2.22	PidLidAppointmentRecur	47
2.23	PidLidAppointmentReplyName	47
2.24	PidLidAppointmentReplyTime	47
2.25	PidLidAppointmentSequence	48
2.26	PidLidAppointmentSequenceTime	48
2.27	PidLidAppointmentStartDate	49
2.28	PidLidAppointmentStartTime	49
2.29	PidLidAppointmentStartWhole	49
2.30	PidLidAppointmentStateFlags	50
2.31	PidLidAppointmentSubType	50

PUBLIC

2.32	PidLidAppointmentTimeZoneDefinitionEndDisplay	50
2.33	PidLidAppointmentTimeZoneDefinitionRecur	51
2.34	PidLidAppointmentTimeZoneDefinitionStartDisplay	51
2.35	PidLidAppointmentUnsendableRecipients	51
2.36	PidLidAppointmentUpdateTime	52
2.37	PidLidAttendeeCriticalChange	52
2.38	PidLidAutoFillLocation	52
2.39	PidLidAutoLog	53
2.40	PidLidAutoProcessState	53
2.41	PidLidAutoStartCheck	53
2.42	PidLidBilling	54
2.43	PidLidBirthdayEventEntryId	54
2.44	PidLidBirthdayLocal	54
2.45	PidLidBusinessCardCardPicture	55
2.46	PidLidBusinessCardDisplayDefinition	55
2.47	PidLidBusyStatus	55
2.48	PidLidCalendarType	56
2.49	PidLidCategories	56
2.50	PidLidCcAttendeesString	56
2.51	PidLidChangeHighlight	57
2.52	PidLidClassification	57
2.53	PidLidClassificationDescription	57
2.54	PidLidClassificationGuid	58
2.55	PidLidClassificationKeep	58
2.56	PidLidClassified	58
2.57	PidLidCleanGlobalObjectId	58
2.58	PidLidClientIntent	59
2.59	PidLidClipEnd	59
2.60	PidLidClipStart	59
2.61	PidLidCollaborateDoc	60
2.62	PidLidCommonEnd	60
2.63	PidLidCommonStart	60
2.64	PidLidCompanies	61
2.65	PidLidConferencingCheck	61
2.66	PidLidConferencingType	61
2.67	PidLidContactCharacterSet	62
2.68	PidLidContactItemData	62
2.69	PidLidContactLinkEntry	62
2.70	PidLidContactLinkName	63
2.71	PidLidContactLinkSearchKey	63
2.72	PidLidContacts	63
2.73	PidLidContactUserField1	64
2.74	PidLidContactUserField2	64
2.75	PidLidContactUserField3	64
2.76	PidLidContactUserField4	65
2.77	PidLidConversationActionLastAppliedTime	65
2.78	PidLidConversationActionMaxDeliveryTime	65
2.79	PidLidConversationActionMoveFolderEid	66
2.80	PidLidConversationActionMoveStoreEid	66
2.81	PidLidConversationActionVersion	66
2.82	PidLidConversationProcessed	67
2.83	PidLidCurrentVersion	67
2.84	PidLidCurrentVersionName	67

PUBLIC

2.85	PidLidDayInterval	68
2.86	PidLidDayOfMonth	68
2.87	PidLidDelegateMail	68
2.88	PidLidDepartment	69
2.89	PidLidDirectory	69
2.90	PidLidDistributionListChecksum	69
2.91	PidLidDistributionListMembers	70
2.92	PidLidDistributionListName	70
2.93	PidLidDistributionListOneOffMembers	70
2.94	PidLidDistributionListStream	71
2.95	PidLidEmail1AddressType	71
2.96	PidLidEmail1DisplayName	71
2.97	PidLidEmail1EmailAddress	72
2.98	PidLidEmail1OriginalDisplayName	72
2.99	PidLidEmail1OriginalEntryId	72
2.100	PidLidEmail1RichTextFormat	73
2.101	PidLidEmail2AddressType	73
2.102	PidLidEmail2DisplayName	73
2.103	PidLidEmail2EmailAddress	74
2.104	PidLidEmail2OriginalDisplayName	74
2.105	PidLidEmail2OriginalEntryId	74
2.106	PidLidEmail2RichTextFormat	75
2.107	PidLidEmail3AddressType	75
2.108	PidLidEmail3DisplayName	75
2.109	PidLidEmail3EmailAddress	76
2.110	PidLidEmail3OriginalDisplayName	76
2.111	PidLidEmail3OriginalEntryId	76
2.112	PidLidEmail3RichTextFormat	77
2.113	PidLidEmailList	77
2.114	PidLidEndRecurrenceDate	77
2.115	PidLidEndRecurrenceTime	77
2.116	PidLidExceptionReplaceTime	78
2.117	PidLidFax1AddressType	78
2.118	PidLidFax1EmailAddress	78
2.119	PidLidFax1OriginalDisplayName	79
2.120	PidLidFax1OriginalEntryId	79
2.121	PidLidFax2AddressType	79
2.122	PidLidFax2EmailAddress	80
2.123	PidLidFax2OriginalDisplayName	80
2.124	PidLidFax2OriginalEntryId	80
2.125	PidLidFax3AddressType	81
2.126	PidLidFax3EmailAddress	81
2.127	PidLidFax3OriginalDisplayName	81
2.128	PidLidFax3OriginalEntryId	82
2.129	PidLidFExceptionalAttendees	82
2.130	PidLidFExceptionalBody	82
2.131	PidLidFileUnder	83
2.132	PidLidFileUnderId	83
2.133	PidLidFileUnderList	83
2.134	PidLidFInvited	84
2.135	PidLidFlagRequest	84
2.136	PidLidFlagString	84
2.137	PidLidForwardInstance	85

PUBLIC

2.138	PidLidForwardNotificationRecipients.....	85
2.139	PidLidFOthersAppointment.....	85
2.140	PidLidFreeBusyLocation.....	86
2.141	PidLidGlobalObjectId.....	86
2.142	PidLidHasPicture.....	86
2.143	PidLidHomeAddress.....	87
2.144	PidLidHomeAddressCountryCode.....	87
2.145	PidLidHtml.....	87
2.146	PidLidICalendarDayOfWeekMask.....	88
2.147	PidLidInboundICalStream.....	88
2.148	PidLidInfoPathFormName.....	88
2.149	PidLidInstantMessagingAddress.....	88
2.150	PidLidIntendedBusyStatus.....	89
2.151	PidLidInternetAccountName.....	89
2.152	PidLidInternetAccountStamp.....	89
2.153	PidLidIsException.....	90
2.154	PidLidIsRecurring.....	90
2.155	PidLidIsSilent.....	91
2.156	PidLidLinkedTaskItems.....	91
2.157	PidLidLocation.....	91
2.158	PidLidLogDocumentPosted.....	92
2.159	PidLidLogDocumentPrinted.....	92
2.160	PidLidLogDocumentRouted.....	92
2.161	PidLidLogDocumentSaved.....	93
2.162	PidLidLogDuration.....	93
2.163	PidLidLogEnd.....	93
2.164	PidLidLogFlags.....	93
2.165	PidLidLogStart.....	94
2.166	PidLidLogType.....	94
2.167	PidLidLogTypeDesc.....	94
2.168	PidLidMeetingType.....	95
2.169	PidLidMeetingWorkspaceUrl.....	95
2.170	PidLidMonthInterval.....	95
2.171	PidLidMonthOfYear.....	96
2.172	PidLidMonthOfYearMask.....	96
2.173	PidLidNetShowUrl.....	96
2.174	PidLidNoEndDateFlag.....	97
2.175	PidLidNonSendableBcc.....	97
2.176	PidLidNonSendableCc.....	97
2.177	PidLidNonSendableTo.....	98
2.178	PidLidNonSendBccTrackStatus.....	98
2.179	PidLidNonSendCcTrackStatus.....	98
2.180	PidLidNonSendToTrackStatus.....	99
2.181	PidLidNoteColor.....	99
2.182	PidLidNoteHeight.....	100
2.183	PidLidNoteWidth.....	100
2.184	PidLidNoteX.....	100
2.185	PidLidNoteY.....	100
2.186	PidLidOccurrences.....	101
2.187	PidLidOldLocation.....	101
2.188	PidLidOldRecurrenceType.....	101
2.189	PidLidOldWhenEndWhole.....	102
2.190	PidLidOldWhenStartWhole.....	102

PUBLIC

2.191	PidLidOnlinePassword.....	103
2.192	PidLidOptionalAttendees	103
2.193	PidLidOrganizerAlias	103
2.194	PidLidOriginalStoreEntryId	104
2.195	PidLidOtherAddress.....	104
2.196	PidLidOtherAddressCountryCode.....	104
2.197	PidLidOwnerCriticalChange	105
2.198	PidLidOwnerName	105
2.199	PidLidPercentComplete	105
2.200	PidLidPostalAddressId	106
2.201	PidLidPostRssChannel.....	106
2.202	PidLidPostRssChannelLink	106
2.203	PidLidPostRssItemGuid	107
2.204	PidLidPostRssItemHash	107
2.205	PidLidPostRssItemLink.....	107
2.206	PidLidPostRssItemXml	108
2.207	PidLidPostRssSubscription.....	108
2.208	PidLidPrivate.....	108
2.209	PidLidPromptSendUpdate.....	109
2.210	PidLidRecurrenceDuration	109
2.211	PidLidRecurrencePattern	109
2.212	PidLidRecurrenceType	110
2.213	PidLidRecurring	110
2.214	PidLidReferenceEntryId	110
2.215	PidLidReferredBy	111
2.216	PidLidReminderDelta	111
2.217	PidLidReminderFileParameter	111
2.218	PidLidReminderOverride	112
2.219	PidLidReminderPlaySound.....	112
2.220	PidLidReminderSet	112
2.221	PidLidReminderSignalTime	113
2.222	PidLidReminderTime	113
2.223	PidLidReminderTimeDate	114
2.224	PidLidReminderTimeTime.....	114
2.225	PidLidReminderType	114
2.226	PidLidRemoteStatus.....	115
2.227	PidLidRequiredAttendees	115
2.228	PidLidResourceAttendees	115
2.229	PidLidResponseStatus	116
2.230	PidLidServerProcessed	116
2.231	PidLidServerProcessingActions.....	116
2.232	PidLidSharingAnonymity	117
2.233	PidLidSharingBindingEntryId	117
2.234	PidLidSharingBrowseUrl.....	117
2.235	PidLidSharingCapabilities	118
2.236	PidLidSharingConfigurationUrl	118
2.237	PidLidSharingDataRangeEnd	118
2.238	PidLidSharingDataRangeStart.....	118
2.239	PidLidSharingDetail.....	119
2.240	PidLidSharingExtensionXml	119
2.241	PidLidSharingFilter.....	119
2.242	PidLidSharingFlags.....	120
2.243	PidLidSharingFlavor	120

PUBLIC

2.244	PidLidSharingFolderEntryId	120
2.245	PidLidSharingIndexEntryId	120
2.246	PidLidSharingInitiatorEntryId	121
2.247	PidLidSharingInitiatorName	121
2.248	PidLidSharingInitiatorSmtip	121
2.249	PidLidSharingInstanceGuid	122
2.250	PidLidSharingLastAutoSyncTime	122
2.251	PidLidSharingLastSyncTime	122
2.252	PidLidSharingLocalComment	122
2.253	PidLidSharingLocalLastModificationTime	123
2.254	PidLidSharingLocalName	123
2.255	PidLidSharingLocalPath	123
2.256	PidLidSharingLocalStoreUid	124
2.257	PidLidSharingLocalType	124
2.258	PidLidSharingLocalUid	124
2.259	PidLidSharingOriginalMessageEntryId	124
2.260	PidLidSharingParentBindingEntryId	125
2.261	PidLidSharingParticipants	125
2.262	PidLidSharingPermissions	125
2.263	PidLidSharingProviderExtension	126
2.264	PidLidSharingProviderGuid	126
2.265	PidLidSharingProviderName	126
2.266	PidLidSharingProviderUrl	126
2.267	PidLidSharingRangeEnd	127
2.268	PidLidSharingRangeStart	127
2.269	PidLidSharingReciprocation	127
2.270	PidLidSharingRemoteByteSize	128
2.271	PidLidSharingRemoteComment	128
2.272	PidLidSharingRemoteCrc	128
2.273	PidLidSharingRemoteLastModificationTime	128
2.274	PidLidSharingRemoteMessageCount	129
2.275	PidLidSharingRemoteName	129
2.276	PidLidSharingRemotePass	129
2.277	PidLidSharingRemotePath	130
2.278	PidLidSharingRemoteStoreUid	130
2.279	PidLidSharingRemoteType	130
2.280	PidLidSharingRemoteUid	130
2.281	PidLidSharingRemoteUser	131
2.282	PidLidSharingRemoteVersion	131
2.283	PidLidSharingResponseTime	131
2.284	PidLidSharingResponseType	132
2.285	PidLidSharingRoamLog	132
2.286	PidLidSharingStart	132
2.287	PidLidSharingStatus	133
2.288	PidLidSharingStop	133
2.289	PidLidSharingSyncFlags	133
2.290	PidLidSharingSyncInterval	133
2.291	PidLidSharingTimeToLive	134
2.292	PidLidSharingTimeToLiveAuto	134
2.293	PidLidSharingWorkingHoursDays	134
2.294	PidLidSharingWorkingHoursEnd	135
2.295	PidLidSharingWorkingHoursStart	135
2.296	PidLidSharingWorkingHoursTimeZone	135

PUBLIC

2.297	PidLidSideEffects	135
2.298	PidLidSingleBodyICal	136
2.299	PidLidSmartNoAttach	136
2.300	PidLidSpamOriginalFolder	136
2.301	PidLidStartRecurrenceDate.....	137
2.302	PidLidStartRecurrenceTime	137
2.303	PidLidTaskAcceptanceState	137
2.304	PidLidTaskAccepted	138
2.305	PidLidTaskActualEffort.....	138
2.306	PidLidTaskAssigner	138
2.307	PidLidTaskAssigners.....	139
2.308	PidLidTaskComplete	139
2.309	PidLidTaskCustomFlags	139
2.310	PidLidTaskDateCompleted.....	140
2.311	PidLidTaskDeadOccurrence	140
2.312	PidLidTaskDueDate	140
2.313	PidLidTaskEstimatedEffort.....	141
2.314	PidLidTaskFCreator	141
2.315	PidLidTaskFFixOffline	141
2.316	PidLidTaskFRecurring	142
2.317	PidLidTaskGlobalId	142
2.318	PidLidTaskHistory	142
2.319	PidLidTaskLastDelegate	143
2.320	PidLidTaskLastUpdate	143
2.321	PidLidTaskLastUser	143
2.322	PidLidTaskMode.....	143
2.323	PidLidTaskMultipleRecipients	144
2.324	PidLidTaskNoCompute.....	144
2.325	PidLidTaskOrdinal.....	144
2.326	PidLidTaskOwner	145
2.327	PidLidTaskOwnership	145
2.328	PidLidTaskRecurrence	145
2.329	PidLidTaskResetReminder	146
2.330	PidLidTaskRole.....	146
2.331	PidLidTaskStartDate.....	146
2.332	PidLidTaskState.....	147
2.333	PidLidTaskStatus	147
2.334	PidLidTaskStatusOnComplete	147
2.335	PidLidTaskUpdates.....	148
2.336	PidLidTaskVersion.....	148
2.337	PidLidTeamTask	148
2.338	PidLidTimeZone.....	149
2.339	PidLidTimeZoneDescription	149
2.340	PidLidTimeZoneStruct	149
2.341	PidLidToAttendeesString.....	150
2.342	PidLidToDoOrdinalDate.....	150
2.343	PidLidToDoSubOrdinal	151
2.344	PidLidToDoTitle	151
2.345	PidLidTrustRecipientHighlights.....	151
2.346	PidLidUseTnef	152
2.347	PidLidValidFlagStringProof	152
2.348	PidLidVerbResponse.....	152
2.349	PidLidVerbStream.....	153

PUBLIC

2.350	PidLidWeddingAnniversaryLocal	153
2.351	PidLidWeekInterval	153
2.352	PidLidWhere	154
2.353	PidLidWorkAddress	154
2.354	PidLidWorkAddressCity	154
2.355	PidLidWorkAddressCountry	155
2.356	PidLidWorkAddressCountryCode	155
2.357	PidLidWorkAddressPostalCode	155
2.358	PidLidWorkAddressPostOfficeBox	156
2.359	PidLidWorkAddressState	156
2.360	PidLidWorkAddressStreet	156
2.361	PidLidYearInterval	157
2.362	PidLidYomiCompanyName	157
2.363	PidLidYomiFirstName	158
2.364	PidLidYomiLastName	158
2.365	PidNameAcceptLanguage	158
2.366	PidNameApplicationName	159
2.367	PidNameApprovalAllowedDecisionMakers	159
2.368	PidNameApprovalRequestor	159
2.369	PidNameApproved	159
2.370	PidNameAttachmentMacContentType	160
2.371	PidNameAttachmentMacInfo	160
2.372	PidNameAudioNotes	160
2.373	PidNameAuthenticatedAs	161
2.374	PidNameAuthenticatedDomain	161
2.375	PidNameAuthenticatedMechanism	161
2.376	PidNameAuthenticatedSource	161
2.377	PidNameAuthor	162
2.378	PidNameAutomaticSpeechRecognitionData	162
2.379	PidNameBcc	162
2.380	PidNameByteCount	163
2.381	PidNameCalendarAttendeeRole	163
2.382	PidNameCalendarBusystatus	163
2.383	PidNameCalendarContact	164
2.384	PidNameCalendarContactUrl	164
2.385	PidNameCalendarCreated	164
2.386	PidNameCalendarDescriptionUrl	164
2.387	PidNameCalendarDuration	165
2.388	PidNameCalendarExceptionDate	165
2.389	PidNameCalendarExceptionRule	165
2.390	PidNameCalendarGeoLatitude	166
2.391	PidNameCalendarGeoLongitude	166
2.392	PidNameCalendarInstanceType	166
2.393	PidNameCalendarIsOrganizer	167
2.394	PidNameCalendarLastModified	167
2.395	PidNameCalendarLocationUrl	167
2.396	PidNameCalendarMeetingStatus	168
2.397	PidNameCalendarMethod	168
2.398	PidNameCalendarProductId	168
2.399	PidNameCalendarRecurrenceIdRange	168
2.400	PidNameCalendarReminderOffset	169
2.401	PidNameCalendarResources	169
2.402	PidNameCalendarRsvp	169

PUBLIC

2.403	PidNameCalendarSequence	170
2.404	PidNameCalendarTimeZone	170
2.405	PidNameCalendarTimeZoneId	170
2.406	PidNameCalendarTransparent	171
2.407	PidNameCalendarUid	171
2.408	PidNameCalendarVersion	171
2.409	PidNameCategory	172
2.410	PidNameCc	172
2.411	PidNameCharacterCount	172
2.412	PidNameComments	173
2.413	PidNameCompany	173
2.414	PidNameContactsAlternateRecipient	173
2.415	PidNameContactsCountry	173
2.416	PidNameContactsEmail1	174
2.417	PidNameContactsEmail2	174
2.418	PidNameContactsEmail3	174
2.419	PidNameContactsFileAs	175
2.420	PidNameContactsFileAsId	175
2.421	PidNameContactsHomeLatitude	175
2.422	PidNameContactsHomeLongitude	175
2.423	PidNameContactsHomeTimeZone	176
2.424	PidNameContactsMapUrl	176
2.425	PidNameContactsOtherCountryCode	176
2.426	PidNameContactsOtherPager	176
2.427	PidNameContactsOtherTimeZone	177
2.428	PidNameContactsProxyAddresses	177
2.429	PidNameContactsSecretaryUrl	177
2.430	PidNameContactsSourceUrl	178
2.431	PidNameContentBase	178
2.432	PidNameContentClass	178
2.433	PidNameContentDisposition	178
2.434	PidNameContentID	179
2.435	PidNameContentLanguage	179
2.436	PidNameContentLocation	179
2.437	PidNameContentTransferEncoding	180
2.438	PidNameContentType	180
2.439	PidNameControl	180
2.440	PidNameCreateDateTimeReadOnly	181
2.441	PidNameCrossReference	181
2.442	PidNameDavGetContentType	181
2.443	PidNameDavId	181
2.444	PidNameDavIsCollection	182
2.445	PidNameDavIsStructuredDocument	182
2.446	PidNameDavParentName	182
2.447	PidNameDavResourceType	183
2.448	PidNameDavSearchRequest	183
2.449	PidNameDavSearchType	183
2.450	PidNameDavUid	184
2.451	PidNameDisposition	184
2.452	PidNameDispositionNotificationTo	184
2.453	PidNameDistribution	184
2.454	PidNameDocumentParts	185
2.455	PidNameEditTime	185

PUBLIC

2.456	PidNameExchangeIntendedBusyStatus	185
2.457	PidNameExchangeJunkEmailMoveStamp	186
2.458	PidNameExchangeModifyExceptionStructure	186
2.459	PidNameExchangeMsexchembdefaultmailfolder	186
2.460	PidNameExchangeMsexchembdefaultmailfoldertype	187
2.461	PidNameExchangeNoModifyExceptions	187
2.462	PidNameExchangePatternEnd	187
2.463	PidNameExchangePatternStart	187
2.464	PidNameExchangePublicFolderEmailAddress	188
2.465	PidNameExchangeReminderInterval	188
2.466	PidNameExchDatabaseSchema	188
2.467	PidNameExchDataExpectedContentClass	189
2.468	PidNameExchDataSchemaCollectionReference	189
2.469	PidNameExpires	189
2.470	PidNameExpiryDate	190
2.471	PidNameFollowupTo	190
2.472	PidNameFrom	190
2.473	PidNameHeadingPairs	191
2.474	PidNameHiddenCount	191
2.475	PidNameHttpmailCalendar	191
2.476	PidNameHttpmailCc	192
2.477	PidNameHttpmailContacts	192
2.478	PidNameHttpmailContentMediaType	192
2.479	PidNameHttpmailFrom	192
2.480	PidNameHttpmailFromEmail	193
2.481	PidNameHttpmailHtmlDescription	193
2.482	PidNameHttpmailOutbox	193
2.483	PidNameHttpmailSendMessage	194
2.484	PidNameHttpmailSubmitted	194
2.485	PidNameHttpmailTo	194
2.486	PidNameICalendarRecurrenceDate	195
2.487	PidNameICalendarRecurrenceRule	195
2.488	PidNameImportance	195
2.489	PidNameInReplyTo	195
2.490	PidNameInstantMessagingAddress2	196
2.491	PidNameInstantMessagingAddress3	196
2.492	PidNameInternetComment	196
2.493	PidNameInternetKeywords	197
2.494	PidNameInternetSubject	197
2.495	PidNameKeywords	197
2.496	PidNameLastAuthor	198
2.497	PidNameLastPrinted	198
2.498	PidNameLastSaveDateTime	198
2.499	PidNameLineCount	199
2.500	PidNameLines	199
2.501	PidNameLinksDirty	199
2.502	PidNameLocationUrl	199
2.503	PidNameMailSubmissionUri	200
2.504	PidNameManager	200
2.505	PidNameMessageId	200
2.506	PidNameMimeVersion	201
2.507	PidNameMultimediaClipCount	201
2.508	PidNameNewsgroups	201

PUBLIC

2.509	PidNameNntpPostingHost	202
2.510	PidNameNoteCount.....	202
2.511	PidNameOMSAccountGuid.....	202
2.512	PidNameOMSMobileModel	202
2.513	PidNameOMSScheduleTime.....	203
2.514	PidNameOMSServiceType	203
2.515	PidNameOMSSourceType.....	203
2.516	PidNameOrganization.....	204
2.517	PidNameOriginalRecipient.....	204
2.518	PidNameOriginalSpamConfidenceLevel	204
2.519	PidNameOutlookProtectionRuleOverridden.....	204
2.520	PidNameOutlookProtectionRuleTimestamp.....	205
2.521	PidNameOutlookProtectionRuleVersion.....	205
2.522	PidNamePageCount	205
2.523	PidNameParagraphCount	206
2.524	PidNamePath	206
2.525	PidNamePhishingStamp.....	206
2.526	PidNamePostingVersion	206
2.527	PidNamePresentationFormat	207
2.528	PidNamePriority	207
2.529	PidNameQuarantineOriginalSender.....	207
2.530	PidNameReceived	208
2.531	PidNameReferences	208
2.532	PidNameRelayVersion	208
2.533	PidNameReplyBy	209
2.534	PidNameReplyTo	209
2.535	PidNameReturnPath	209
2.536	PidNameReturnReceiptTo.....	209
2.537	PidNameRevisionNumber	210
2.538	PidNameRightsManagementLicense	210
2.539	PidNameRightsProtectMessage	210
2.540	PidNameScale	211
2.541	PidNameSecurity	211
2.542	PidNameSender	211
2.543	PidNameSensitivity	212
2.544	PidNameSlideCount	212
2.545	PidNameSubject.....	212
2.546	PidNameSummary	212
2.547	PidNameTemplate	213
2.548	PidNameThreadIndex.....	213
2.549	PidNameThreadTopic	213
2.550	PidNameThumbnail.....	214
2.551	PidNameTitle	214
2.552	PidNameTo	214
2.553	PidNameWordCount.....	215
2.554	PidNameXCallId	215
2.555	PidNameXFaxNumberOfPages	215
2.556	PidNameXMailer	215
2.557	PidNameXMessageCompleted	216
2.558	PidNameXMessageFlag	216
2.559	PidNameXRequireProtectedPlayOnPhone	216
2.560	PidNameXSenderTelephoneNumber.....	217
2.561	PidNameXSharingBrowseUrl.....	217

PUBLIC

2.562	PidNameXSharingCapabilities	217
2.563	PidNameXSharingConfigUrl	217
2.564	PidNameXSharingExendedCaps	218
2.565	PidNameXSharingFlavor	218
2.566	PidNameXSharingInstanceGuid.....	218
2.567	PidNameXSharingLocalType	218
2.568	PidNameXSharingProviderGuid	219
2.569	PidNameXSharingProviderName	219
2.570	PidNameXSharingProviderUrl	219
2.571	PidNameXSharingRemoteName	219
2.572	PidNameXSharingRemotePath	220
2.573	PidNameXSharingRemoteStoreUid	220
2.574	PidNameXSharingRemoteType.....	220
2.575	PidNameXSharingRemoteUid	221
2.576	PidNameXUnifiedMessagingPartnerAssignedId	221
2.577	PidNameXUnifiedMessagingPartnerContent.....	221
2.578	PidNameXUnifiedMessagingPartnerContext.....	221
2.579	PidNameXUnifiedMessagingPartnerStatus.....	222
2.580	PidNameXUnsent.....	222
2.581	PidNameXVoiceMessageAttachmentOrder.....	222
2.582	PidNameXVoiceMessageDuration	222
2.583	PidNameXVoiceMessageSenderName.....	223
2.584	PidTag7BitDisplayName	223
2.585	PidTagAccess	223
2.586	PidTagAccessLevel	224
2.587	PidTagAccount	224
2.588	PidTagAdditionalRenEntryIds.....	224
2.589	PidTagAdditionalRenEntryIdsEx	224
2.590	PidTagAddressBookAuthorizedSenders.....	225
2.591	PidTagAddressBookContainerId	225
2.592	PidTagAddressBookDeliveryContentLength	225
2.593	PidTagAddressBookDisplayNamePrintable	226
2.594	PidTagAddressBookDisplayTypeExtended	226
2.595	PidTagAddressBookDistributionListExternalMemberCount	226
2.596	PidTagAddressBookDistributionListMemberCount.....	226
2.597	PidTagAddressBookDistributionListMemberSubmitAccepted.....	227
2.598	PidTagAddressBookDistributionListMemberSubmitRejected	227
2.599	PidTagAddressBookDistributionListRejectMessagesFromDLMembers	227
2.600	PidTagAddressBookEntryId	228
2.601	PidTagAddressBookExtensionAttribute1	228
2.602	PidTagAddressBookExtensionAttribute15.....	228
2.603	PidTagAddressBookFolderPathname	228
2.604	PidTagAddressBookHierarchicalChildDepartments.....	229
2.605	PidTagAddressBookHierarchicalDepartmentMembers	229
2.606	PidTagAddressBookHierarchicalIsHierarchicalGroup	229
2.607	PidTagAddressBookHierarchicalParentDepartment	230
2.608	PidTagAddressBookHierarchicalRootDepartment.....	230
2.609	PidTagAddressBookHierarchicalShowInDepartments	230
2.610	PidTagAddressBookHomeMessageDatabase	230
2.611	PidTagAddressBookIsMaster.....	231
2.612	PidTagAddressBookIsMemberOfDistributionList	231
2.613	PidTagAddressBookManageDistributionList	231
2.614	PidTagAddressBookManager.....	232

PUBLIC

2.615	PidTagAddressBookManagerDistinguishedName	232
2.616	PidTagAddressBookMember	232
2.617	PidTagAddressBookMessageId	232
2.618	PidTagAddressBookModerationEnabled	233
2.619	PidTagAddressBookNetworkAddress	233
2.620	PidTagAddressBookObjectDistinguishedName	233
2.621	PidTagAddressBookObjectGuid	234
2.622	PidTagAddressBookOrganizationalUnitRootDistinguishedName	234
2.623	PidTagAddressBookOwner.....	234
2.624	PidTagAddressBookOwnerBackLink	234
2.625	PidTagAddressBookParentEntryId	235
2.626	PidTagAddressBookPhoneticCompanyName	235
2.627	PidTagAddressBookPhoneticDepartmentName	235
2.628	PidTagAddressBookPhoneticDisplayName	236
2.629	PidTagAddressBookPhoneticGivenName	236
2.630	PidTagAddressBookPhoneticSurname	236
2.631	PidTagAddressBookProxyAddresses	236
2.632	PidTagAddressBookPublicDelegates	237
2.633	PidTagAddressBookReports	237
2.634	PidTagAddressBookRoomCapacity	237
2.635	PidTagAddressBookRoomContainers	238
2.636	PidTagAddressBookRoomDescription	238
2.637	PidTagAddressBookSenderHintTranslations	238
2.638	PidTagAddressBookSeniorityIndex	238
2.639	PidTagAddressBookTargetAddress.....	239
2.640	PidTagAddressBookUnauthorizedSenders	239
2.641	PidTagAddressBookX509Certificate	239
2.642	PidTagAddressType.....	240
2.643	PidTagAlternateRecipientAllowed	240
2.644	PidTagAnr	240
2.645	PidTagArchiveDate.....	240
2.646	PidTagArchivePeriod	241
2.647	PidTagArchiveTag	241
2.648	PidTagAssistant.....	241
2.649	PidTagAssistantTelephoneNumber.....	241
2.650	PidTagAssociated.....	242
2.651	PidTagAttachAdditionalInformation.....	242
2.652	PidTagAttachContentBase	242
2.653	PidTagAttachContentId.....	243
2.654	PidTagAttachContentLocation	243
2.655	PidTagAttachDataBinary	243
2.656	PidTagAttachDataObject	244
2.657	PidTagAttachEncoding	244
2.658	PidTagAttachExtension	244
2.659	PidTagAttachFilename	244
2.660	PidTagAttachFlags	245
2.661	PidTagAttachLongFilename	245
2.662	PidTagAttachLongPathname	245
2.663	PidTagAttachmentContactPhoto	246
2.664	PidTagAttachmentFlags	246
2.665	PidTagAttachmentHidden.....	246
2.666	PidTagAttachmentLinkId.....	247
2.667	PidTagAttachMethod	247

PUBLIC

2.668	PidTagAttachMimeTag	247
2.669	PidTagAttachNumber	247
2.670	PidTagAttachPathname.....	248
2.671	PidTagAttachPayloadClass.....	248
2.672	PidTagAttachPayloadProviderGuidString	248
2.673	PidTagAttachRendering	249
2.674	PidTagAttachSize.....	249
2.675	PidTagAttachTag	249
2.676	PidTagAttachTransportName	249
2.677	PidTagAttributeHidden	250
2.678	PidTagAttributeReadOnly	250
2.679	PidTagAttributeSystem	250
2.680	PidTagAutoForwarded	250
2.681	PidTagAutoForwardComment	251
2.682	PidTagAutoResponseSuppress	251
2.683	PidTagBirthday.....	251
2.684	PidTagBlockStatus	252
2.685	PidTagBody	252
2.686	PidTagBodyContentId.....	252
2.687	PidTagBodyContentLocation	252
2.688	PidTagBodyHtml.....	253
2.689	PidTagBusiness2TelephoneNumber	253
2.690	PidTagBusiness2TelephoneNumbers	253
2.691	PidTagBusinessFaxNumber	254
2.692	PidTagBusinessHomePage.....	254
2.693	PidTagBusinessTelephoneNumber	254
2.694	PidTagCallbackTelephoneNumber.....	254
2.695	PidTagCallId	255
2.696	PidTagCarTelephoneNumber	255
2.697	PidTagCdoRecurrenceid	255
2.698	PidTagChangeKey.....	256
2.699	PidTagChangeNotificationGuid	256
2.700	PidTagChangeNumber	256
2.701	PidTagChildrensNames	256
2.702	PidTagClientActions	257
2.703	PidTagClientSubmitTime.....	257
2.704	PidTagCnsetRead	257
2.705	PidTagCnsetSeen.....	257
2.706	PidTagCnsetSeenFAI	258
2.707	PidTagCodePageId.....	258
2.708	PidTagComment.....	258
2.709	PidTagCompanyMainTelephoneNumber.....	259
2.710	PidTagCompanyName	259
2.711	PidTagComputerNetworkName	259
2.712	PidTagConflictEntryId.....	260
2.713	PidTagConflictItems	260
2.714	PidTagContainerClass.....	260
2.715	PidTagContainerContents.....	260
2.716	PidTagContainerFlags.....	261
2.717	PidTagContainerHierarchy.....	261
2.718	PidTagContentCount	261
2.719	PidTagContentFilterPhishingConfidenceLevel.....	261
2.720	PidTagContentFilterSpamConfidenceLevel	262

PUBLIC

2.721	PidTagContentUnreadCount	262
2.722	PidTagConversationId	262
2.723	PidTagConversationIndex	263
2.724	PidTagConversationIndexTracking	263
2.725	PidTagConversationTopic	263
2.726	PidTagCountry	263
2.727	PidTagCreationTime	264
2.728	PidTagCreatorEntryId	264
2.729	PidTagCreatorName	264
2.730	PidTagCreatorSimpleDisplayName	265
2.731	PidTagCustomerId	265
2.732	PidTagDamBackPatched	265
2.733	PidTagDamOriginalEntryId	265
2.734	PidTagDefaultPostMessageClass	266
2.735	PidTagDeferredActionMessageOriginalEntryId	266
2.736	PidTagDeferredDeliveryTime	266
2.737	PidTagDeferredSendNumber	266
2.738	PidTagDeferredSendTime	267
2.739	PidTagDeferredSendUnits	267
2.740	PidTagDelegatedByRule	267
2.741	PidTagDelegateFlags	268
2.742	PidTagDeleteAfterSubmit	268
2.743	PidTagDeletedOn	268
2.744	PidTagDepartmentName	268
2.745	PidTagDepth	269
2.746	PidTagDisplayBcc	269
2.747	PidTagDisplayCc	269
2.748	PidTagDisplayName	270
2.749	PidTagDisplayNamePrefix	270
2.750	PidTagDisplayTo	270
2.751	PidTagDisplayType	270
2.752	PidTagDisplayTypeEx	271
2.753	PidTagEcWarning	271
2.754	PidTagEmailAddress	271
2.755	PidTagEndAttach	272
2.756	PidTagEndDate	272
2.757	PidTagEndEmbed	272
2.758	PidTagEndFolder	272
2.759	PidTagEndMessage	273
2.760	PidTagEndToRecip	273
2.761	PidTagEntryId	273
2.762	PidTagExceptionEndTime	274
2.763	PidTagExceptionReplaceTime	274
2.764	PidTagExceptionStartTime	274
2.765	PidTagExchangeNTSecurityDescriptor	274
2.766	PidTagExpiryNumber	275
2.767	PidTagExpiryTime	275
2.768	PidTagExpiryUnits	275
2.769	PidTagExtendedFolderFlags	275
2.770	PidTagExtendedRuleMessageActions	276
2.771	PidTagExtendedRuleMessageCondition	276
2.772	PidTagExtendedRuleSizeLimit	276
2.773	PidTagFaxNumberOfPages	276

PUBLIC

2.774	PidTagFlagCompleteTime	277
2.775	PidTagFlagStatus	277
2.776	PidTagFlatUrlName	277
2.777	PidTagFolderAssociatedContents	278
2.778	PidTagFolderId	278
2.779	PidTagFolderType	278
2.780	PidTagFollowupIcon	278
2.781	PidTagFreeBusyCountMonths	279
2.782	PidTagFreeBusyEntryIds	279
2.783	PidTagFreeBusyMessageEmailAddress	279
2.784	PidTagFreeBusyPublishEnd	279
2.785	PidTagFreeBusyPublishStart	280
2.786	PidTagFreeBusyRangeTimestamp	280
2.787	PidTagFtpSite	280
2.788	PidTagFXDelProp	280
2.789	PidTagFXErrorInfo	281
2.790	PidTagGatewayNeedsToRefresh	281
2.791	PidTagGender	281
2.792	PidTagGeneration	281
2.793	PidTagGivenName	282
2.794	PidTagGovernmentIdNumber	282
2.795	PidTagHasAttachments	282
2.796	PidTagHasDeferredActionMessages	283
2.797	PidTagHasNamedProperties	283
2.798	PidTagHasRules	283
2.799	PidTagHierarchyChangeNumber	283
2.800	PidTagHobbies	284
2.801	PidTagHome2TelephoneNumber	284
2.802	PidTagHome2TelephoneNumbers	284
2.803	PidTagHomeAddressCity	285
2.804	PidTagHomeAddressCountry	285
2.805	PidTagHomeAddressPostalCode	285
2.806	PidTagHomeAddressPostOfficeBox	285
2.807	PidTagHomeAddressStateOrProvince	286
2.808	PidTagHomeAddressStreet	286
2.809	PidTagHomeFaxNumber	286
2.810	PidTagHomeTelephoneNumber	287
2.811	PidTagHtml	287
2.812	PidTagICalendarEndTime	287
2.813	PidTagICalendarReminderNextTime	287
2.814	PidTagICalendarStartTime	288
2.815	PidTagIconIndex	288
2.816	PidTagIdsetDeleted	288
2.817	PidTagIdsetExpired	289
2.818	PidTagIdsetGiven	289
2.819	PidTagIdsetRead	289
2.820	PidTagIdsetNoLongerInScope	289
2.821	PidTagIdsetUnread	290
2.822	PidTagImapCachedMsgsize	290
2.823	PidTagImportance	290
2.824	PidTagInConflict	291
2.825	PidTagIncrementalSyncMessagePartial	291
2.826	PidTagIncrSyncChg	291

PUBLIC

2.827	PidTagIncrSyncChgPartial	291
2.828	PidTagIncrSyncDel.....	292
2.829	PidTagIncrSyncEnd	292
2.830	PidTagIncrSyncGroupId.....	292
2.831	PidTagIncrSyncGroupInfo	292
2.832	PidTagIncrSyncMessage	293
2.833	PidTagIncrSyncProgressMode	293
2.834	PidTagIncrSyncProgressPerMsg	293
2.835	PidTagIncrSyncRead	293
2.836	PidTagIncrSyncStateBegin	294
2.837	PidTagIncrSyncStateEnd.....	294
2.838	PidTagInitialDetailsPane	294
2.839	PidTagInitials.....	294
2.840	PidTagInReplyToId	295
2.841	PidTagInstanceKey	295
2.842	PidTagInstanceNum	295
2.843	PidTagInstID	295
2.844	PidTagInternetArticleNumber	296
2.845	PidTagInternetCodepage	296
2.846	PidTagInternetMailOverrideFormat	296
2.847	PidTagInternetMessageId	296
2.848	PidTagInternetReferences	297
2.849	PidTagIpmAppointmentEntryId	297
2.850	PidTagIpmContactEntryId	297
2.851	PidTagIpmDraftsEntryId	297
2.852	PidTagIpmJournalEntryId.....	298
2.853	PidTagIpmNoteEntryId	298
2.854	PidTagIpmTaskEntryId	298
2.855	PidTagIsdnNumber	298
2.856	PidTagItemTemporaryflags	299
2.857	PidTagJunkAddRecipientsToSafeSendersList	299
2.858	PidTagJunkIncludeContacts	299
2.859	PidTagJunkPermanentlyDelete.....	300
2.860	PidTagJunkPhishingEnableLinks	300
2.861	PidTagJunkThreshold	300
2.862	PidTagKeyword	300
2.863	PidTagLanguage.....	301
2.864	PidTagLastModificationTime	301
2.865	PidTagLastModifierEntryId	301
2.866	PidTagLastModifierName.....	302
2.867	PidTagLastModifierSimpleDisplayName	302
2.868	PidTagLastVerbExecuted.....	302
2.869	PidTagLastVerbExecutionTime	302
2.870	PidTagListHelp	303
2.871	PidTagListSubscribe	303
2.872	PidTagListUnsubscribe.....	303
2.873	PidTagLocalCommitTime.....	303
2.874	PidTagLocaleId.....	304
2.875	PidTagLocality.....	304
2.876	PidTagLocation.....	304
2.877	PidTagMailboxOwnerEntryId.....	305
2.878	PidTagMailboxOwnerName	305
2.879	PidTagManagerName	305

PUBLIC

2.880	PidTagMappingSignature	305
2.881	PidTagMaximumSubmitMessageSize.....	306
2.882	PidTagMemberId	306
2.883	PidTagMemberName	306
2.884	PidTagMemberRights	307
2.885	PidTagMessageAttachments	307
2.886	PidTagMessageCcMe	307
2.887	PidTagMessageClass	307
2.888	PidTagMessageCodepage.....	308
2.889	PidTagMessageDeliveryTime	308
2.890	PidTagMessageEditorFormat.....	309
2.891	PidTagMessageFlags	309
2.892	PidTagMessageHandlingSystemCommonName.....	309
2.893	PidTagMessageLocaleId	309
2.894	PidTagMessageRecipientMe	310
2.895	PidTagMessageRecipients	310
2.896	PidTagMessageSize.....	310
2.897	PidTagMessageSizeExtended	311
2.898	PidTagMessageStatus.....	311
2.899	PidTagMessageSubmissionId	311
2.900	PidTagMessageToMe	311
2.901	PidTagMid	312
2.902	PidTagMiddleName	312
2.903	PidTagMimeSkeleton	312
2.904	PidTagMobileTelephoneNumber	312
2.905	PidTagNativeBody.....	313
2.906	PidTagNewAttach	313
2.907	PidTagNewFXFolder	313
2.908	PidTagNextSendAcct	314
2.909	PidTagNickname.....	314
2.910	PidTagNormalizedSubject	314
2.911	PidTagNormalMessageSize	315
2.912	PidTagObjectType.....	315
2.913	PidTagOfficeLocation	315
2.914	PidTagOfflineAddressBookCompressedSize	315
2.915	PidTagOfflineAddressBookContainerGuid	316
2.916	PidTagOfflineAddressBookDistinguishedName	316
2.917	PidTagOfflineAddressBookFileSize	316
2.918	PidTagOfflineAddressBookFileType	317
2.919	PidTagOfflineAddressBookLanguageId	317
2.920	PidTagOfflineAddressBookMessageClass.....	317
2.921	PidTagOfflineAddressBookName.....	317
2.922	PidTagOfflineAddressBookSequence	318
2.923	PidTagOfflineAddressBookShaHash	318
2.924	PidTagOfflineAddressBookTruncatedProperties	318
2.925	PidTagOrdinalMost.....	318
2.926	PidTagOrganizationalIdNumber.....	319
2.927	PidTagOriginalDeliveryTime.....	319
2.928	PidTagOriginalDisplayBcc.....	319
2.929	PidTagOriginalDisplayCc	320
2.930	PidTagOriginalDisplayName.....	320
2.931	PidTagOriginalDisplayTo	320
2.932	PidTagOriginalEntryId	321

PUBLIC

2.933	PidTagOriginalMessageClass.....	321
2.934	PidTagOriginalMessageId	321
2.935	PidTagOriginalSearchKey	321
2.936	PidTagOriginalSenderAddressType	322
2.937	PidTagOriginalSenderEmailAddress	322
2.938	PidTagOriginalSenderEntryId.....	322
2.939	PidTagOriginalSenderName	323
2.940	PidTagOriginalSenderSearchKey	323
2.941	PidTagOriginalSensitivity	323
2.942	PidTagOriginalSentRepresentingAddressType.....	323
2.943	PidTagOriginalSentRepresentingEmailAddress.....	324
2.944	PidTagOriginalSentRepresentingEntryId	324
2.945	PidTagOriginalSentRepresentingName	324
2.946	PidTagOriginalSentRepresentingSearchKey.....	325
2.947	PidTagOriginalSubject	325
2.948	PidTagOriginalSubmitTime	325
2.949	PidTagOriginatorDeliveryReportRequested.....	326
2.950	PidTagOriginatorNonDeliveryReportRequested	326
2.951	PidTagOtherAddressCity	326
2.952	PidTagOtherAddressCountry.....	327
2.953	PidTagOtherAddressPostalCode	327
2.954	PidTagOtherAddressPostOfficeBox.....	327
2.955	PidTagOtherAddressStateOrProvince	327
2.956	PidTagOtherAddressStreet	328
2.957	PidTagOtherTelephoneNumber	328
2.958	PidTagOutOfOfficeState	328
2.959	PidTagOwnerAppointmentId	329
2.960	PidTagPagerTelephoneNumber	329
2.961	PidTagParentEntryId	329
2.962	PidTagParentFolderId	329
2.963	PidTagParentKey	330
2.964	PidTagParentSourceKey.....	330
2.965	PidTagPersonalHomePage	330
2.966	PidTagPolicyTag	331
2.967	PidTagPostalAddress	331
2.968	PidTagPostalCode	331
2.969	PidTagPostOfficeBox	331
2.970	PidTagPredecessorChangeList.....	332
2.971	PidTagPrimaryFaxNumber	332
2.972	PidTagPrimarySendAccount.....	332
2.973	PidTagPrimarySmtptAddress	333
2.974	PidTagPrimaryTelephoneNumber	333
2.975	PidTagPriority	333
2.976	PidTagProcessed	334
2.977	PidTagProfession	334
2.978	PidTagProhibitReceiveQuota	334
2.979	PidTagProhibitSendQuota	334
2.980	PidTagProviderSubmitTime	335
2.981	PidTagPublicFolderAdministrativeDescription	335
2.982	PidTagPublicFolderProxy	335
2.983	PidTagPurportedSenderDomain	335
2.984	PidTagRadioTelephoneNumber	336
2.985	PidTagRead	336

PUBLIC

2.986	PidTagReadReceiptAddressType.....	336
2.987	PidTagReadReceiptEmailAddress.....	336
2.988	PidTagReadReceiptEntryId.....	337
2.989	PidTagReadReceiptName.....	337
2.990	PidTagReadReceiptRequested.....	337
2.991	PidTagReadReceiptSearchKey.....	338
2.992	PidTagReceivedByAddressType.....	338
2.993	PidTagReceivedByEmailAddress.....	338
2.994	PidTagReceivedByEntryId.....	338
2.995	PidTagReceivedByFlags.....	339
2.996	PidTagReceivedByName.....	339
2.997	PidTagReceivedBySearchKey.....	339
2.998	PidTagReceivedRepresentingAddressType.....	340
2.999	PidTagReceivedRepresentingEmailAddress.....	340
2.1000	PidTagReceivedRepresentingEntryId.....	340
2.1001	PidTagReceivedRepresentingFlags.....	340
2.1002	PidTagReceivedRepresentingName.....	341
2.1003	PidTagReceivedRepresentingSearchKey.....	341
2.1004	PidTagReceivedRepresentingSimpleDisplayName.....	341
2.1005	PidTagRecipientDisplayName.....	342
2.1006	PidTagRecipientEntryId.....	342
2.1007	PidTagRecipientFlags.....	342
2.1008	PidTagRecipientOrder.....	342
2.1009	PidTagRecipientProposed.....	343
2.1010	PidTagRecipientProposedEndTime.....	343
2.1011	PidTagRecipientProposedStartTime.....	343
2.1012	PidTagRecipientReassignmentProhibited.....	343
2.1013	PidTagRecipientResourceState.....	344
2.1014	PidTagRecipientTrackStatus.....	344
2.1015	PidTagRecipientTrackStatusTime.....	344
2.1016	PidTagRecipientType.....	344
2.1017	PidTagRecordKey.....	345
2.1018	PidTagReferredByName.....	345
2.1019	PidTagRemindersOnlineEntryId.....	345
2.1020	PidTagRemoteHeaderLoc.....	345
2.1021	PidTagRemoteMessageTransferAgent.....	346
2.1022	PidTagRenderingPosition.....	346
2.1023	PidTagReplyRecipientEntries.....	346
2.1024	PidTagReplyRecipientNames.....	347
2.1025	PidTagReplyRequested.....	347
2.1026	PidTagReplyTemplateId.....	347
2.1027	PidTagReplyTime.....	347
2.1028	PidTagReportEntryId.....	348
2.1029	PidTagReportingMessageTransferAgent.....	348
2.1030	PidTagReportName.....	348
2.1031	PidTagReportSearchKey.....	348
2.1032	PidTagReportTag.....	349
2.1033	PidTagReportText.....	349
2.1034	PidTagReportTime.....	349
2.1035	PidTagResolveMethod.....	349
2.1036	PidTagResponseRequested.....	350
2.1037	PidTagResponsibility.....	350
2.1038	PidTagRetentionDate.....	350

PUBLIC

2.1039	PidTagRetentionFlags	351
2.1040	PidTagRetentionPeriod.....	351
2.1041	PidTagRights	351
2.1042	PidTagRoamingDatatypes	351
2.1043	PidTagRoamingDictionary	352
2.1044	PidTagRoamingXmlStream	352
2.1045	PidTagRowid	352
2.1046	PidTagRowType	352
2.1047	PidTagRtfCompressed.....	353
2.1048	PidTagRtfInSync	353
2.1049	PidTagRtfSyncBodyCount.....	353
2.1050	PidTagRtfSyncBodyCrc	353
2.1051	PidTagRtfSyncBodyTag	354
2.1052	PidTagRtfSyncPrefixCount	354
2.1053	PidTagRtfSyncTrailingCount.....	354
2.1054	PidTagRuleActionNumber	354
2.1055	PidTagRuleActions	355
2.1056	PidTagRuleActionType	355
2.1057	PidTagRuleCondition	355
2.1058	PidTagRuleError.....	355
2.1059	PidTagRuleFolderEntryId	356
2.1060	PidTagRuleId.....	356
2.1061	PidTagRuleIds	356
2.1062	PidTagRuleLevel	356
2.1063	PidTagRuleMessageLevel.....	357
2.1064	PidTagRuleMessageName.....	357
2.1065	PidTagRuleMessageProvider	357
2.1066	PidTagRuleMessageProviderData	357
2.1067	PidTagRuleMessageSequence	358
2.1068	PidTagRuleMessageState	358
2.1069	PidTagRuleMessageUserFlags	358
2.1070	PidTagRuleName	358
2.1071	PidTagRuleProvider	359
2.1072	PidTagRuleProviderData.....	359
2.1073	PidTagRuleSequence	359
2.1074	PidTagRuleState	359
2.1075	PidTagRuleUserFlags	360
2.1076	PidTagRwRulesStream	360
2.1077	PidTagScheduleInfoAppointmentTombstone.....	360
2.1078	PidTagScheduleInfoAutoAcceptAppointments	360
2.1079	PidTagScheduleInfoDelegateEntryIds.....	361
2.1080	PidTagScheduleInfoDelegateNames	361
2.1081	PidTagScheduleInfoDelegateNamesW	361
2.1082	PidTagScheduleInfoDelegatorWantsCopy.....	361
2.1083	PidTagScheduleInfoDelegatorWantsInfo	362
2.1084	PidTagScheduleInfoDisallowOverlappingAppts	362
2.1085	PidTagScheduleInfoDisallowRecurringAppts	362
2.1086	PidTagScheduleInfoDontMailDelegates	362
2.1087	PidTagScheduleInfoFreeBusy	363
2.1088	PidTagScheduleInfoFreeBusyAway	363
2.1089	PidTagScheduleInfoFreeBusyBusy	363
2.1090	PidTagScheduleInfoFreeBusyMerged.....	363
2.1091	PidTagScheduleInfoFreeBusyTentative	364

PUBLIC

2.1092	PidTagScheduleInfoMonthsAway	364
2.1093	PidTagScheduleInfoMonthsBusy	364
2.1094	PidTagScheduleInfoMonthsMerged	364
2.1095	PidTagScheduleInfoMonthsTentative	365
2.1096	PidTagScheduleInfoResourceType	365
2.1097	PidTagSchedulePlusFreeBusyEntryId	365
2.1098	PidTagScriptData	365
2.1099	PidTagSearchFolderDefinition	366
2.1100	PidTagSearchFolderEfpFlags	366
2.1101	PidTagSearchFolderExpiration	366
2.1102	PidTagSearchFolderId	366
2.1103	PidTagSearchFolderLastUsed	367
2.1104	PidTagSearchFolderRecreateInfo	367
2.1105	PidTagSearchFolderStorageType	367
2.1106	PidTagSearchFolderTag	367
2.1107	PidTagSearchFolderTemplateId	368
2.1108	PidTagSearchKey	368
2.1109	PidTagSecureSubmitFlags	368
2.1110	PidTagSecurityDescriptor	368
2.1111	PidTagSecurityDescriptorAsXml	369
2.1112	PidTagSelectable	369
2.1113	PidTagSenderAddressType	369
2.1114	PidTagSenderEmailAddress	369
2.1115	PidTagSenderEntryId	370
2.1116	PidTagSenderFlags	370
2.1117	PidTagSenderIdStatus	370
2.1118	PidTagSenderName	371
2.1119	PidTagSenderSearchKey	371
2.1120	PidTagSenderSimpleDisplayName	371
2.1121	PidTagSenderSmtpAddress	371
2.1122	PidTagSenderTelephoneNumber	372
2.1123	PidTagSendInternetEncoding	372
2.1124	PidTagSendRichInfo	372
2.1125	PidTagSensitivity	372
2.1126	PidTagSentMailSvrEID	373
2.1127	PidTagSentRepresentingAddressType	373
2.1128	PidTagSentRepresentingEmailAddress	373
2.1129	PidTagSentRepresentingEntryId	374
2.1130	PidTagSentRepresentingFlags	374
2.1131	PidTagSentRepresentingName	374
2.1132	PidTagSentRepresentingSearchKey	375
2.1133	PidTagSentRepresentingSimpleDisplayName	375
2.1134	PidTagSessionInitiationProtocolUri	375
2.1135	PidTagSmtpAddress	375
2.1136	PidTagSortLocaleId	376
2.1137	PidTagSourceKey	376
2.1138	PidTagSpokenName	376
2.1139	PidTagSpouseName	376
2.1140	PidTagStartDate	377
2.1141	PidTagStartDateEtc	377
2.1142	PidTagStartEmbed	377
2.1143	PidTagStartFAIMsg	378
2.1144	PidTagStartMessage	378

PUBLIC

2.1145	PidTagStartRecip	378
2.1146	PidTagStartSubFld	378
2.1147	PidTagStartTopFld.....	379
2.1148	PidTagStateOrProvince	379
2.1149	PidTagStoreEntryId	379
2.1150	PidTagStoreState.....	379
2.1151	PidTagStoreSupportMask	380
2.1152	PidTagStreetAddress	380
2.1153	PidTagSubfolder	380
2.1154	PidTagSubfolders.....	380
2.1155	PidTagSubject	381
2.1156	PidTagSubjectPrefix	381
2.1157	PidTagSurname	381
2.1158	PidTagSwappedToDoData	382
2.1159	PidTagSwappedToDoStore	382
2.1160	PidTagTargetEntryId	382
2.1161	PidTagTcvConstLongOne.....	383
2.1162	PidTagTelecommunicationsDeviceForDeafTelephoneNumber.....	383
2.1163	PidTagTelexNumber	383
2.1164	PidTagTemplateData	383
2.1165	PidTagTemplateid	384
2.1166	PidTagTemporaryDefaultDocument.....	384
2.1167	PidTagTextAttachmentCharset	384
2.1168	PidTagThumbnailPhoto	384
2.1169	PidTagTitle	385
2.1170	PidTagTnefCorrelationKey	385
2.1171	PidTagToDoItemFlags.....	385
2.1172	PidTagTransmittableDisplayName.....	385
2.1173	PidTagTransportMessageHeaders	386
2.1174	PidTagTrustSender.....	386
2.1175	PidTagTtyTddPhoneNumber.....	386
2.1176	PidTagUrlCompName.....	387
2.1177	PidTagUrlCompNameSet	387
2.1178	PidTagUrlName.....	387
2.1179	PidTagUserCertificate	387
2.1180	PidTagUserEntryId	388
2.1181	PidTagUserX509Certificate	388
2.1182	PidTagViewDescriptorBinary	388
2.1183	PidTagViewDescriptorName	388
2.1184	PidTagViewDescriptorStrings	389
2.1185	PidTagViewDescriptorVersion.....	389
2.1186	PidTagVoiceMessageAttachmentOrder.....	389
2.1187	PidTagVoiceMessageDuration	389
2.1188	PidTagVoiceMessageSenderName.....	390
2.1189	PidTagWeddingAnniversary	390
2.1190	PidTagWlinkAddressBookEID	390
2.1191	PidTagWlinkAddressBookStoreEID	391
2.1192	PidTagWlinkCalendarColor.....	391
2.1193	PidTagWlinkClientID.....	391
2.1194	PidTagWlinkEntryId.....	391
2.1195	PidTagWlinkFlags.....	392
2.1196	PidTagWlinkFolderType.....	392
2.1197	PidTagWlinkGroupClsid	392

2.1198 PidTagWlinkGroupHeaderID 392
2.1199 PidTagWlinkGroupName..... 393
2.1200 PidTagWlinkOrdinal 393
2.1201 PidTagWlinkRecordKey 393
2.1202 PidTagWlinkROGroupType 393
2.1203 PidTagWlinkSaveStamp 394
2.1204 PidTagWlinkSection 394
2.1205 PidTagWlinkStoreEntryId 394
2.1206 PidTagWlinkType 394

3 Structure Examples 396

4 Security Considerations..... 397

5 Appendix A: Product Behavior 398

6 Change Tracking..... 399

7 Index 404

1 Introduction

This specification lists all properties used for communication between clients and servers, provides summary information about each property, and provides links to the documents in which the property value ranges and semantics are specified.

1.1 Glossary

The following terms are defined in [\[MS-OXGLOS\]](#):

- .jpg**
- 8.3 name**
- action**
- address book**
- address book container**
- Address Book object**
- address list**
- address type**
- alias**
- ambiguous name resolution (ANR)**
- appointment**
- Appointment object**
- attachment**
- Attachment object**
- attendee**
- Augmented Backus-Naur Form (ABNF)**
- Bcc recipient**
- body part**
- busy**
- calendar**
- Calendar folder**
- Calendar object**
- carbon copy (Cc) recipient**
- change number (CN)**
- character set**
- class**
- code page**
- collection**
- common name (CN)**
- conflict**
- contact**
- Contact object**
- contents table**
- conversation**
- conversation action**
- Coordinated Universal Time (UTC)**
- cyclic redundancy check (CRC) (2)**
- delegate**
- delivery receipt**
- departmental group**
- display template**
- distinguished name (DN)**
- distribution list**
- domain**

E-mail object
Embedded Message object
entry ID
EntryID
EntryList
exception
Exception Attachment object
Exception Embedded Message object
feed
flags
folder
folder associated information (FAI)
folder ID (FID)
free
free/busy
global identifier (GID)
group header
GUID
header
Hypertext Markup Language (HTML)
Hypertext Transfer Protocol (HTTP)
ICS state
identifier
IDSET
instance
journal
Journal object
Lightweight Directory Access Protocol (LDAP)
local replica
locale
Logon object
Long ID (LID)
mailbox
mail tip
mail user
meeting
Meeting object
meeting request
Meeting Request object
Meeting Response object
Meeting Update object
Meeting Workspace
meeting-related object
message
message body
message class
message ID (MID)
Message object
messaging object
MIME
Multipurpose Internet Mail Extensions (MIME)
Name Service Provider Interface (NSPI)
named property
navigation shortcut
non-Unicode

normal message
Note object
offline address book (OAB)
optional attendee
organizer
orphan instance
Out of Office (OOF)
Outbox folder
Permanent Entry ID
permissions
phishing
plain text
primary recipient
property (1)
property ID
property name
property set
property tag
property type
public folder
read receipt
recipient (1)
recurrence pattern
Recurring Calendar object
recurring series
recurring task
reminder
replica (2)
replica ID (REPLID)
resource
Resource object
restriction
Rich Text Format (RTF)
rights-managed e-mail message
Root folder
ROP buffer
rule
S/MIME
search folder
Server object
Short Message Service (SMS)
signal time
Simple Mail Transfer Protocol (SMTP)
single instance
soft delete
sort order
spam
spam filter
special folder
store
stream
subobject
synchronization
synchronization scope
table

tagged property
Task object
task request
template
Transmission Control Protocol (TCP)
Transport Neutral Encapsulation Format (TNEF)
Unicode
Uniform Resource Identifier (URI)
Uniform Resource Locator (URL)
unsendable attendee
Use License (UL)
WebDAV
WebDAV client
X500 DN
XML

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[ISO/IEC8802-3] International Organization for Standardization, "Information technology -- Telecommunications and information exchange between systems -- Local and metropolitan area networks -- Specific requirements -- Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications", ISO/IEC 8802-3:2000, http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=31002

[MS-NSPI] Microsoft Corporation, "Name Service Provider Interface (NSPI) Protocol Specification", April 2008, [http://msdn.microsoft.com/en-us/library/dd942204\(PROT.10\).aspx](http://msdn.microsoft.com/en-us/library/dd942204(PROT.10).aspx)

[MS-OXABREF] Microsoft Corporation, "[Address Book Name Service Provider Interface \(NSPI\) Referral Protocol Specification](#)", April 2008.

[MS-OXBBODY] Microsoft Corporation, "[Best Body Retrieval Protocol Specification](#)", April 2008.

[MS-OXCDATA] Microsoft Corporation, "[Data Structures](#)", April 2008.

[MS-OXCFOLD] Microsoft Corporation, "[Folder Object Protocol Specification](#)", April 2008.

[MS-OXCFXICS] Microsoft Corporation, "[Bulk Data Transfer Protocol Specification](#)", April 2008.

[MS-OXCICAL] Microsoft Corporation, "[iCalendar to Appointment Object Conversion Protocol Specification](#)", April 2008.

PUBLIC

- [MS-OXCMAIL] Microsoft Corporation, "[RFC2822 and MIME to E-Mail Object Conversion Protocol Specification](#)", April 2008.
- [MS-OXCMSG] Microsoft Corporation, "[Message and Attachment Object Protocol Specification](#)", April 2008.
- [MS-OXCNOTIF] Microsoft Corporation, "[Core Notifications Protocol Specification](#)", April 2008.
- [MS-OXCPERM] Microsoft Corporation, "[Exchange Access and Operation Permissions Protocol Specification](#)", April 2008.
- [MS-OXCPRPT] Microsoft Corporation, "[Property and Stream Object Protocol Specification](#)", April 2008.
- [MS-OXCROPS] Microsoft Corporation, "[Remote Operations \(ROP\) List and Encoding Protocol Specification](#)", April 2008.
- [MS-OXCRPC] Microsoft Corporation, "[Wire Format Protocol Specification](#)", April 2008.
- [MS-OXCSPAM] Microsoft Corporation, "[Spam Confidence Level Protocol Specification](#)", April 2008.
- [MS-OXCSTOR] Microsoft Corporation, "[Store Object Protocol Specification](#)", April 2008.
- [MS-OXCSYNC] Microsoft Corporation, "[Mailbox Synchronization Protocol Specification](#)", April 2008.
- [MS-OXCTABL] Microsoft Corporation, "[Table Object Protocol Specification](#)", April 2008.
- [MS-OXLDAP] Microsoft Corporation, "[Lightweight Directory Access Protocol \(LDAP\) Version 3 Extensions](#)", April 2008.
- [MS-OXMSG] Microsoft Corporation, "[.MSG File Format](#)", April 2008.
- [MS-OXOAB] Microsoft Corporation, "[Offline Address Book \(OAB\) File Format and Schema](#)", April 2008.
- [MS-OXOABK] Microsoft Corporation, "[Address Book Object Protocol Specification](#)", April 2008.
- [MS-OXOABKT] Microsoft Corporation, "[Address Book User Interface Templates Protocol Specification](#)", April 2008.
- [MS-OXOCAL] Microsoft Corporation, "[Appointment and Meeting Object Protocol Specification](#)", April 2008.
- [MS-OXOCFG] Microsoft Corporation, "[Configuration Information Protocol Specification](#)", April 2008.
- [MS-OXOCNTC] Microsoft Corporation, "[Contact Object Protocol Specification](#)", April 2008.
- [MS-OXODLGT] Microsoft Corporation, "[Delegate Access Configuration Protocol Specification](#)", April 2008.
- [MS-OXODOC] Microsoft Corporation, "[Document Object Protocol Specification](#)", April 2008.
- [MS-OXOFLAG] Microsoft Corporation, "[Informational Flagging Protocol Specification](#)", April 2008.
- [MS-OXOJRN] Microsoft Corporation, "[Journal Object Protocol Specification](#)", April 2008.
- [MS-OXOMSG] Microsoft Corporation, "[E-Mail Object Protocol Specification](#)", April 2008.
- [MS-OXONOTE] Microsoft Corporation, "[Note Object Protocol Specification](#)", April 2008.

PUBLIC

- [MS-OXOPFFB] Microsoft Corporation, "[Public Folder-Based Free/Busy Protocol Specification](#)", April 2008.
- [MS-OXOPOST] Microsoft Corporation, "[Post Object Protocol Specification](#)", April 2008.
- [MS-OXORMDR] Microsoft Corporation, "[Reminder Settings Protocol Specification](#)", April 2008.
- [MS-OXORMMS] Microsoft Corporation, "[Rights-Managed E-Mail Object Protocol Specification](#)", April 2008.
- [MS-OXORSS] Microsoft Corporation, "[RSS Object Protocol Specification](#)", April 2008.
- [MS-OXORULE] Microsoft Corporation, "[E-Mail Rules Protocol Specification](#)", April 2008.
- [MS-OXOSFLD] Microsoft Corporation, "[Special Folders Protocol Specification](#)", April 2008.
- [MS-OXOSMIME] Microsoft Corporation, "[S/MIME E-Mail Object Protocol Specification](#)", April 2008.
- [MS-OXOSMMS] Microsoft Corporation, "[Short Message Service \(SMS\) and Multimedia Messaging Service \(MMS\) Object Protocol Specification](#)", April 2008.
- [MS-OXOSRCH] Microsoft Corporation, "[Search Folder List Configuration Protocol Specification](#)", April 2008.
- [MS-OXOTASK] Microsoft Corporation, "[Task-Related Objects Protocol Specification](#)", April 2008.
- [MS-OXOUM] Microsoft Corporation, "[Voice Mail and Fax Objects Protocol Specification](#)", April 2008.
- [MS-OXPFOAB] Microsoft Corporation, "[Offline Address Book \(OAB\) Public Folder Retrieval Protocol Specification](#)", April 2008.
- [MS-OXPHISH] Microsoft Corporation, "[Phishing Warning Protocol Specification](#)", April 2008.
- [MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)", April 2008.
- [MS-OXPSVAL] Microsoft Corporation, "[E-Mail Postmark Validation Protocol Specification](#)", April 2008.
- [MS-OXRTFCP] Microsoft Corporation, "[Rich Text Format \(RTF\) Compression Protocol Specification](#)", April 2008.
- [MS-OXRTFEX] Microsoft Corporation, "[Rich Text Format \(RTF\) Extensions Specification](#)", April 2008.
- [MS-OXSHARE] Microsoft Corporation, "[Sharing Message Object Protocol Specification](#)", April 2008.
- [MS-OXTNEF] Microsoft Corporation, "[Transport Neutral Encapsulation Format \(TNEF\) Data Structure](#)", April 2008.
- [MS-OXVCARD] Microsoft Corporation, "[vCard to Contact Object Conversion Protocol Specification](#)", April 2008.
- [MS-OXWAVLS] Microsoft Corporation, "[Availability Web Service Protocol Specification](#)", April 2008.
- [MS-XWDCAL] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Calendar Support](#)", December 2008.
- [MS-XWDCNTC] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Contacts Support](#)", February 2009.

[MS-XWDDOC] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Documents Support](#)", December 2008.

[MS-XWDEXT] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Core Extensions](#)", April 2009.

[MS-XWDFOLD] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Folders Support](#)", December 2008.

[MS-XWDMAIL] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for E-Mail Support](#)", December 2008.

[MS-XWDSEARCH] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Search](#)", December 2008.

[MS-XWDSTRUCTDOC] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Extensions for Structured Documents](#)", December 2008.

[MS-XWDVSEC] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Protocol Security Descriptor Extensions](#)", April 2008.

[MS-WMF] Microsoft Corporation, "Windows Metafile Format Specification", June 2007, <http://msdn.microsoft.com/en-us/library/cc215212.aspx>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>

[RFC4234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", RFC 4234, October 2005, <http://www.ietf.org/rfc/rfc4234.txt>

1.2.2 Informative References

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)", April 2008.

1.3 Overview

This specification provides basic reference information about **message object properties** referenced by protocol specifications. The following information is provided for each property, as appropriate:

Alternate names: Any additional names used to refer to this property.

Area: A group of properties with related functionality.

Canonical name: The name used to refer to this property in other protocol specifications.

Description: A brief description of the contents of the property. Properties that are not defined in the core protocol documents do not have descriptions.

Data type: The property value type, as specified in [\[MS-OXCDATA\]](#), that specifies the type of values allowed for this property.

Property ID: An unsigned 16-bit quantity that identifies a **tagged property**.

Property long ID (LID): An unsigned 32-bit quantity that, along with the **property set**, identifies a **named property**.

Property name: A string that, along with the property set, identifies a named property.

Property set: A **GUID** that identifies a group of properties with a similar purpose.

References: One or more protocol documents that specify the semantics and allowed values for this property.

1.3.1 Common Message Classes

Applications set certain required properties corresponding to the object's **message class**. Applications handle the case where required properties are missing; treating a Message object as IPM.Note is a common fallback strategy. The following table lists several common message classes, the functional area to which each one corresponds, and the document that specifies each one's required and optional properties.

In this table, an asterisk "*" denotes that any string can appear at that point.

Area	PidTagMessageClass values	Document
Common	IPM.*	[MS-OXCMSG]
Email	IPM.Note, REPORT.*	[MS-OXCMSG]
Calendar	IPM.Appointment, IPM.Schedule.Meeting.Request, IPM.Schedule.Meeting.Resp.*, IPM.Schedule.Meeting.Canceled, IPM.Schedule.Meeting.Notification	[MS-OXOCAL]
Contact	IPM.Contact, IPM DistList	[MS-OXOCNTC]
Task	IPM.Task, IPM.TaskRequest.*	[MS-OXOTASK]
Journal	IPM.Activity	[MS-OXOJRNL]
Sticky note	IPM.StickyNote	[MS-OXONOTE]
Document	IPM.Document.*	[MS-OXODOC]
Post	IPM.Post	[MS-OXOPOST]
RSS feed	IPM.Post.RSS	[MS-OXORSS]
Rights-managed email	IPM.Note with PidNameContentClass= rmsg.message	[MS-OXORMMS]
S/MIME email	IPM.Note.SMIME, IPM.Note.SMIME.MultipartSigned	[MS-OXOSMIME]
Short message service / Multimedia Message Service Message	IPM.Note.Mobile.SMS, IPM.Note.Mobile.MMS	[MS-OXOSMMS]

Area	PidTagMessageClass values	Document
Unified messaging	IPM.Note.Microsoft.Voicemail, IPM.Note.Microsoft.Fax	[MS-OXOUM]
Sharing	IPM.Sharing IPM.Sharing.*	[MS-OXSHARE]

1.3.2 Commonly Used Property Sets

In the property index that forms the main body of this document (section [2](#)) each named property is listed with the GUID that defines its property set. Several of the more common property sets are listed here as a convenient reference, with their functional areas.

Area	Property set name and GUID value
Common	PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}
Common	PSETID_Common {00062008-0000-0000-C000-000000000046}
Contact	PSETID_Address {00062004-0000-0000-C000-000000000046}
Email	PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}
Calendar	PSETID_Appointment {00062002-0000-0000-C000-000000000046}
Calendar	PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}
Journal	PSETID_Log {0006200A-0000-0000-C000-000000000046}
Messaging	PSETID_Messaging {41F28F13-83F4-4114-A584-EEDB5A6B0BFF}
Sticky note	PSETID_Note {0006200E-0000-0000-C000-000000000046}
RSS feed	PSETID_PostRss {00062041-0000-0000-C000-000000000046}
Task	PSETID_Task {00062003-0000-0000-C000-000000000046}
Unified messaging	PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}
Common	PS_MAPI {00020328-0000-0000-C000-000000000046}

Area	Property set name and GUID value
Sync	PSETID_AirSync {71035549-0739-4DCB-9163-00F0580DBBDF}
Sharing	PSETID_Sharing {00062040-0000-0000-C000-000000000046}

1.3.3 Property ID Ranges

The 65,536 possible values of the **property ID** are divided into sub-ranges reserved for various purposes, as specified in the following table.

In this context, the term "non-transmittable" refers specifically to transmission via an e-mail transport protocol (such as [SMTP](#)), and not to any network transport protocol (such as **TCP**).

- Servers do not allow property ID in ranges specified as non-transmittable to be submitted for transport to another server via an e-mail transport protocol. Property IDs in ranges not specified as non-transmittable are submitted for transport to another server.
- Clients can use properties in ranges specified as message class-defined for application-defined purposes. When doing so, applications specify a value for [PidTagMessageClass](#) (section [2.887](#)) that is distinct from any value listed in section [1.3.1](#).
- Clients can use any named property for application-defined purposes. No constraint is placed on the value of [PidTagMessageClass](#) in this case, but the named property's property set is distinct from any value listed in section [1.3.2](#). Note that named properties are always transmittable.
- Clients can use properties in ranges specified as transport-defined, but they cannot define new properties in those ranges.
- Clients can use and define properties in ranges specified as user-defined, but need to avoid conflicts with alternate definitions of the same property ID.

Range minimum	Range maximum	Specification
0x0001	0x0BFF	Message envelope property; reserved
0x0C00	0x0DFF	Recipient property; reserved
0x0E00	0x0FFF	Non-transmittable Message property; reserved
0x1000	0x2FFF	Message content property; reserved
0x3000	0x33FF	Multi-purpose property that can appear on all or most objects; reserved
0x3400	0x35FF	Message store property; reserved
0x3600	0x36FF	Folder and address book container property; reserved
0x3700	0x38FF	Attachment property; reserved
0x3900	0x39FF	Address book object property; reserved
0x3A00	0x3BFF	Mail user object property; reserved

Range minimum	Range maximum	Specification
0x3C00	0x3CFF	Distribution list property; reserved
0x3D00	0x3DFF	Profile section property; reserved
0x3E00	0x3EFF	Status object property; reserved
0x4000	0x57FF	Transport-defined envelope property
0x5800	0x5FFF	Transport-defined recipient property
0x6000	0x65FF	User-defined non-transmittable property
0x6600	0x67FF	Provider-defined internal non-transmittable property
0x6800	0x7BFF	Message class-defined content property
0x7C00	0x7FFF	Message class-defined non-transmittable property
0x8000	0xFFFF	Reserved for mapping to named properties. See [MS-NSPI] for more information about the static mapping of NSPI property names to property IDs that occurs in this ID range.

1.3.4 WebDAV Property Naming

The e-mail server is natively a MAPI store where the vast majority of properties in it are MAPI properties. The **WebDAV** implementation uses the **Augmented Backus-Naur Form (ABNF)** notation, as specified in [\[RFC4234\]](#), as a way to name MAPI properties, allowing **WebDAV clients** to work with these properties directly.

The `http://schemas.microsoft.com/mapi/` namespace is used to directly access MAPI properties on the server. The namespace consists of three sub namespaces: `proptag`, `id`, and `string`. The ABNF notation used to specify the format of these namespaces is described in this section.

1.3.4.1 `http://schemas.microsoft.com/mapi/proptag` Namespace

This namespace is used to access properties on the server that are identified by a property ID. You can access these properties through WebDAV by appending the hexadecimal property ID value and the hexadecimal **property type** value to the namespace prefix.

```
proptag-specifier = "http://schemas.microsoft.com/mapi/proptag/x" property-id property-type
property-id      = 4HEXDIG
property-type    = 4HEXDIG
```

Example:

```
http://schemas.microsoft.com/mapi/proptag/x0037001f (PidTagSubject)
```

1.3.4.2 <http://schemas.microsoft.com/mapi/id> Namespace

This namespace is used to access named properties on the server that are identified by a property **long ID (LID)**. You can access these properties through WebDAV by appending the property set and the hexadecimal property long ID (LID) value to the namespace prefix.

```
id-specifier = "http://schemas.microsoft.com/mapi/id/" property-set "/" property-long-id
property-set = "{" 8HEXDIG "-" 4HEXDIG "-" 4HEXDIG "-" 4HEXDIG "-" 12HEXDIG "}"
property-long-id = 8HEXDIG
```

Example:

```
http://schemas.microsoft.com/mapi/id/{00062002-0000-0000-C000-000000000046}/x00008213
(PidLidAppointmentDuration)
```

1.3.4.3 <http://schemas.microsoft.com/mapi/string> Namespace

This namespace is used to access named properties on the server that are identified by a property name. You can access these properties through WebDAV by appending the property set and the property name to the namespace prefix.

```
string-specifier = "http://schemas.microsoft.com/mapi/string/" property-set "/" property-name
property-set = "{" 8*HEXDIG "-" 4*HEXDIG "-" 4*HEXDIG "-" 4*HEXDIG "-" 12*HEXDIG "}"
property-name = 1*CHAR
```

Example:

```
http://schemas.microsoft.com/mapi/string/{00020329-0000-0000-C000-000000000046}/Subject
(PidNameSubject)
```

1.4 Relationship to Protocols and Other Structures

This document relies on property data type and error code definitions in [\[MS-OXCADATA\]](#). For **tables** and examples specifying property data types, and for tables specifying property and other error codes, see [\[MS-OXCADATA\]](#).

The object type specifications listed in section [1.2.1](#) depend on this document for basic information about message object properties to which they refer. Such basic information includes property IDs and data types. This specification, in turn, depends on each of those object type specifications to specify the behavior and semantics of the properties specific to its protocol.

1.5 Applicability Statement

This document provides the numeric values needed to encode property names, **tags**, and types in **ROP buffers**. It also serves as a convenient index to the object type documents that define how each property is used.

1.6 Versioning and Localization

None.

1.7 Vendor-Extensible Fields

Property ID ranges, as specified in section [1.3.3](#), describe how applications choose properties to create new message object types or to add functionality to existing types.

2 Structures

2.1 PidLidAddressBookProviderArrayType

Canonical name: PidLidAddressBookProviderArrayType

Description: Specifies the state of the **contact's** electronic addresses and represents a set of bit-flags.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008029

Data type: PtypInteger32, 0x0003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidABPArrayType

2.2 PidLidAddressBookProviderEmailList

Canonical name: PidLidAddressBookProviderEmailList

Description: Specifies which electronic address properties are set on the **Contact object**.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008028

Data type: PtypMultipleInteger32, 0x1003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidABPEmailList

2.3 PidLidAddressCountryCode

Canonical name: PidLidAddressCountryCode

Description: Specifies the country code portion of the contact's mailing address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DD

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidAddressCountryCode

2.4 PidLidAgingDontAgeMe

Canonical name: PidLidAgingDontAgeMe

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000850E

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidAgingDontAgeMe

2.5 PidLidAllAttendeesString

Canonical name: PidLidAllAttendeesString

Description: Specifies a list of all the **attendees** except for the **organizer**, including **resources** and **unsendable attendees**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008238

WebDAV: <http://schemas.microsoft.com/mapi/allattendeesstring>

Data type: PtypString, 0x001F

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidAllAttendeesString

2.6 PidLidAllowExternalCheck

Canonical name: PidLidAllowExternalCheck

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008246

Data type: PtypBoolean, 0x000B

Area: Conferencing

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#)

Alternate names: dispidAllowExternCheck

2.7 PidLidAnniversaryEventEntryId

Canonical name: PidLidAnniversaryEventEntryId

Description: Specifies the object **EntryId** of the **Appointment object** that represents a contact's anniversary.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000804E

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidAnniversaryEventEID

2.8 PidLidAppointmentAuxiliaryFlags

Canonical name: PidLidAppointmentAuxiliaryFlags

Description: Specifies a bit field that describes the auxiliary state of the object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008207

Data type: PtypInteger32, 0x0003

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptAuxFlags

2.9 PidLidAppointmentColor

Canonical name: PidLidAppointmentColor

Description: Specifies the color to be used when displaying the **Calendar object**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008214

Data type: PtypInteger32, 0x0003

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptColor

2.10 PidLidAppointmentCounterProposal

Canonical name: PidLidAppointmentCounterProposal

Description: Indicates whether a **Meeting Response object** is a **counter proposal**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008257

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptCounterProposal

2.11 PidLidAppointmentDuration

Canonical name: PidLidAppointmentDuration

Description: Specifies the length of the event, in minutes.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008213

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/apptduration>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptDuration

2.12 PidLidAppointmentEndDate

Canonical name: PidLidAppointmentEndDate

Description: Indicates the date the **appointment** ends.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008211

WebDAV: <http://schemas.microsoft.com/mapi/apptenddate>

Data type: PtypTime, 0x0040

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptEndDate

2.13 PidLidAppointmentEndTime

Canonical name: PidLidAppointmentEndTime

Description: Indicates the time the appointment ends.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008210

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptendtime>

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptEndTime

2.14 PidLidAppointmentEndWhole

Canonical name: PidLidAppointmentEndWhole

Description: Specifies the end date and time for the event.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000820E

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptendwhole>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-oxcical\]](#), [\[MS-oxopffb\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptEndWhole

2.15 PidLidAppointmentLastSequence

Canonical name: PidLidAppointmentLastSequence

Description: Indicates to the organizer the last sequence number that was sent to any attendee.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008203

Data type: PtypInteger32, 0x0003

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-oxcical\]](#)

Alternate names: dispidApptLastSequence

2.16 PidLidAppointmentMessageClass

Canonical name: PidLidAppointmentMessageClass

Description: Indicates the message class of the **Meeting object** that is to be generated from the **Meeting Request object**.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000024

Data type: PtypString, 0x001F

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptMessageClass

2.17 PidLidAppointmentNotAllowPropose

Canonical name: PidLidAppointmentNotAllowPropose

Description: Indicates whether attendees are not allowed to propose a new date and/or time for the **meeting**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000825A

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptNotAllowPropose

2.18 PidLidAppointmentProposalNumber

Canonical name: PidLidAppointmentProposalNumber

Description: Specifies the number of attendees who have sent counter proposals that have not been accepted or rejected by the organizer.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008259

Data type: PtypInteger32, 0x0003

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptProposalNum

2.19 PidLidAppointmentProposedDuration

Canonical name: PidLidAppointmentProposedDuration

Description: Indicates the proposed value for [PidLidAppointmentDuration](#) (section [2.11](#)) for a counter proposal.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008256

Data type: PtypInteger32, 0x0003

Area: Meetings

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptProposedDuration

2.20 PidLidAppointmentProposedEndWhole

Canonical name: PidLidAppointmentProposedEndWhole

Description: Specifies the proposed value for [PidLidAppointmentEndWhole](#) (section [2.14](#)) for a counter proposal.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008251

Data type: PtypTime, 0x0040

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptProposedEndWhole

2.21 PidLidAppointmentProposedStartWhole

Canonical name: PidLidAppointmentProposedStartWhole

Description: Specifies the proposed value for [PidLidAppointmentStartWhole](#) for a counter proposal.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008250

Data type: PtypTime, 0x0040

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptProposedStartWhole

2.22 PidLidAppointmentRecur

Canonical name: PidLidAppointmentRecur

Description: Specifies the dates and times when a **recurring series** occurs.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008216

Data type: PtypBinary, 0x0102

WebDAV: <http://schemas.microsoft.com/mapi/apptrecur>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptRecur

2.23 PidLidAppointmentReplyName

Canonical name: PidLidAppointmentReplyName

Description: Specifies the user who last replied to the **meeting request** or meeting update.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008230

Data type: PtypString, 0x001F

WebDAV: <http://schemas.microsoft.com/mapi/apptreplyname>

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptReplyName, <http://schemas.microsoft.com/mapi/apptreplyname>

2.24 PidLidAppointmentReplyTime

Canonical name: PidLidAppointmentReplyTime

Description: Specifies the date and time at which the attendee responded to a received meeting request or **Meeting Update object**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008220

Data type: PtypTime, 0x0040

WebDAV: urn:schemas:calendar:replytime, http://schemas.microsoft.com/mapi/apptreplytime

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidApptReplyTime

2.25 PidLidAppointmentSequence

Canonical name: PidLidAppointmentSequence

Description: Specifies the sequence number of a Meeting object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008201

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/apptsequence

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptSequence

2.26 PidLidAppointmentSequenceTime

Canonical name: PidLidAppointmentSequenceTime

Description: Indicates the date and time at which the property [PidLidAppointmentSequence](#) (section [2.25](#)) was last modified.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008202

Data type: PtypTime, 0x0040

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptSeqTime

2.27 PidLidAppointmentStartDate

Canonical name: PidLidAppointmentStartDate

Description: Identifies the date the appointment starts.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008212

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptstartdate>

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptStartDate

2.28 PidLidAppointmentStartTime

Canonical name: PidLidAppointmentStartTime

Description: Identifies the time the appointment starts.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000820F

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptstarttime>

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptStartTime

2.29 PidLidAppointmentStartWhole

Canonical name: PidLidAppointmentStartWhole

Description: Specifies the start date and time of the event.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000820D

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptstartwhole>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOPFFB\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptStartWhole

2.30 PidLidAppointmentStateFlags

Canonical name: PidLidAppointmentStateFlags

Description: Specifies a bit field that describes the state of the object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008217

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/apptstateflags

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidApptStateFlags

2.31 PidLidAppointmentSubType

Canonical name: PidLidAppointmentSubType

Description: Specifies whether the event is an all-day event.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008215

Data type: PtypBoolean, 0x000B

WebDAV: urn:schemas:calendar:alldayevent, http://schemas.microsoft.com/mapi/apptsubtype

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidApptSubType

2.32 PidLidAppointmentTimeZoneDefinitionEndDisplay

Canonical name: PidLidAppointmentTimeZoneDefinitionEndDisplay

Description: Specifies time zone information that indicates the time zone of the [PidLidAppointmentEndWhole](#) property (section [2.14](#)).

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000825F

Data type: PtypBinary, 0x0102

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptTZDefEndDisplay

2.33 PidLidAppointmentTimeZoneDefinitionRecur

Canonical name: PidLidAppointmentTimeZoneDefinitionRecur

Description: Specifies time zone information that describes how to convert the meeting date and time on a recurring series to and from **UTC**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008260

Data type: PtypBinary, 0x0102

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOCFG\]](#)

Alternate names: dispidApptTZDefRecur

2.34 PidLidAppointmentTimeZoneDefinitionStartDisplay

Canonical name: PidLidAppointmentTimeZoneDefinitionStartDisplay

Description: Specifies time zone information that indicates the time zone of the [PidLidAppointmentStartWhole](#) property (section [2.29](#)).

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000825E

Data type: PtypBinary, 0x0102

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidApptTZDefStartDisplay

2.35 PidLidAppointmentUnsendableRecipients

Canonical name: PidLidAppointmentUnsendableRecipients

Description: Contains a list of unsendable attendees.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000825D

Data type: PtypBinary, 0x0102

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidApptUnsendableRecips

2.36 PidLidAppointmentUpdateTime

Canonical name: PidLidAppointmentUpdateTime

Description: Indicates the time at which the appointment was last updated.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008226

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/apptupdatetime>

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidApptUpdateTime

2.37 PidLidAttendeeCriticalChange

Canonical name: PidLidAttendeeCriticalChange

Description: Specifies the date and time at which the **meeting-related object** was sent.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000001

Data type: PtypTime, 0x0040

WebDAV: http://schemas.microsoft.com/mapi/attendee_critical_change

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_ATTENDEE_CRITICAL_CHANGE

2.38 PidLidAutoFillLocation

Canonical name: PidLidAutoFillLocation

Description: Indicates whether the value of the [PidLidLocation](#) property (section [2.157](#)) is set to the [PidTagDisplayName](#) property (section [2.748](#)).

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000823A

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidAutoFillLocation

2.39 PidLidAutoLog

Canonical name: PidLidAutoLog

Description: Specifies to the application whether to create a **Journal object** for each **action** associated with this Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008025

Data type: PtypBoolean, 0x000B

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidAutoLog

2.40 PidLidAutoProcessState

Canonical name: PidLidAutoProcessState

Description: Specifies the options used in automatic processing of e-mail messages.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000851A

Data type: PtypInteger32, 0x0003

Area: General Message Properties

Defining references: [\[MS-OXOMSG\]](#)

Alternate names: dispidSniffState

2.41 PidLidAutoStartCheck

Canonical name: PidLidAutoStartCheck

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008244

Data type: PtypBoolean, 0x000B

Area: Conferencing

References: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidAutoStartCheck

2.42 PidLidBilling

Canonical name: PidLidBilling

Description: Specifies billing information for the contact.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008535

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:billinginformation

Area: General Message Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidBilling

2.43 PidLidBirthdayEventEntryId

Canonical name: PidLidBirthdayEventEntryId

Description: Specifies the object EntryId of an optional Appointment object that represents the contact's birthday.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000804D

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidBirthdayEventEID

2.44 PidLidBirthdayLocal

Canonical name: PidLidBirthdayLocal

Description: Specifies the birthday of a contact.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DE

Data type: PtypTime, 0x0040

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidApptBirthdayLocal

2.45 PidLidBusinessCardCardPicture

Canonical name: PidLidBusinessCardCardPicture

Description: Contains the image to be used on a business card.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008041

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidBCCardPicture

2.46 PidLidBusinessCardDisplayDefinition

Canonical name: PidLidBusinessCardDisplayDefinition

Description: Contains user customization details for displaying a contact as a business card.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008040

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidBCDisplayDefinition

2.47 PidLidBusyStatus

Canonical name: PidLidBusyStatus

Description: Specifies the availability of a user for the event described by the object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008205

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/busystatus>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOPFFB\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidBusyStatus

2.48 PidLidCalendarType

Canonical name: PidLidCalendarType

Description: Contains the value of the **CalendarType** field from the [PidLidAppointmentRecur](#) property (section [2.22](#)).

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000001C

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/calendar_type

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_CALENDAR_TYPE

2.49 PidLidCategories

Canonical name: PidLidCategories

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property long ID (LID): 0x00009000

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-OXCMAIL\]](#), [\[MS-OXVCARD\]](#)

Alternate names: dispidCategories

2.50 PidLidCcAttendeesString

Canonical name: PidLidCcAttendeesString

Description: Contains a list of all the sendable attendees who are also **optional attendees**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000823C

Data type: PtypString, 0x001F

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidCCAttendeesString

2.51 PidLidChangeHighlight

Canonical name: PidLidChangeHighlight

Description: Specifies a bit field that indicates how the Meeting object has changed.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008204

Data type: PtypInteger32, 0x0003

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidChangeHighlight

2.52 PidLidClassification

Canonical name: PidLidClassification

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085B6

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: dispidClassification

2.53 PidLidClassificationDescription

Canonical name: PidLidClassificationDescription

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085B7

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: dispidClassDesc

2.54 PidLidClassificationGuid

Canonical name: PidLidClassificationGuid

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085B8

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: dispidClassGuid

2.55 PidLidClassificationKeep

Canonical name: PidLidClassificationKeep

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085BA

Data type: PtypBoolean, 0x000B

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: dispidClassKeep

2.56 PidLidClassified

Canonical name: PidLidClassified

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085B5

Data type: PtypBoolean, 0x000B

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: dispidClassified

2.57 PidLidCleanGlobalObjectId

Canonical name: PidLidCleanGlobalObjectId

Description: Contains the value of the [PidLidGlobalObjectId](#) property (section [2.141](#)) for an object that represents an **exception** to a recurring series, where the Year, Month, and Day fields are all zero.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000023

Data type: PtypBinary, 0x0102

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidCleanGlobalObjId

2.58 PidLidClientIntent

Canonical name: PidLidClientIntent

Description: Specifies the end date and time of the event in UTC.

Property set: PSETID_CalendarAssistant {11000E07-B51B-40D6-AF21-CAA85EDAB1D0}

Property long ID (LID): 0x00000015

Data type: PtypInteger32, 0x0003

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidClientIntent

2.59 PidLidClipEnd

Canonical name: PidLidClipEnd

Description: Specifies the end date and time of the event in UTC.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008236

Data type: PtypTime, 0x0040

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidClipEnd

2.60 PidLidClipStart

Canonical name: PidLidClipStart

Description: Specifies the start date and time of the event in UTC.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008235

Data type: PtypTime, 0x0040

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidClipStart

2.61 PidLidCollaborateDoc

Canonical name: PidLidCollaborateDoc

Description: Specifies the document to be launched when the user joins the meeting.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008247

Data type: PtypString, 0x001F

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidCollaborateDoc

2.62 PidLidCommonEnd

Canonical name: PidLidCommonEnd

Description: Indicates the end time for the Message object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008517

Data type: PtypTime, 0x0040

Area: General Message Properties

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOJRNLI\]](#), [\[MS-OXOTASK\]](#)

Alternate names: dispidCommonEnd

2.63 PidLidCommonStart

Canonical name: PidLidCommonStart

Description: Indicates the start time for the Message object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008516

Data type: PtypTime, 0x0040

Area: General Message Properties

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOJRNL\]](#), [\[MS-OXOTASK\]](#)

Alternate names: dispidCommonStart

2.64 PidLidCompanies

Canonical name: PidLidCompanies

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008539

Data type: PtypMultipleString, 0x101F

Area: General Message Properties

References: [\[MS-OXOJRNL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidCompanies, <http://schemas.microsoft.com/exchange/companies>

2.65 PidLidConferencingCheck

Canonical name: PidLidConferencingCheck

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008240

Data type: PtypBoolean, 0x000B

Area: Conferencing

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidConfCheck

2.66 PidLidConferencingType

Canonical name: PidLidConferencingType

Description: Specifies the type of the meeting.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008241

Data type: PtypInteger32, 0x0003

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidConfType

2.67 PidLidContactCharacterSet

Canonical name: PidLidContactCharacterSet

Description: Specifies the **character set** used for a Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008023

Data type: PtypInteger32, 0x0003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidContactCharSet

2.68 PidLidContactItemData

Canonical name: PidLidContactItemData

Description: Specifies the visible fields in the application's user interface that are used to help display the contact information.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008007

Data type: PtypMultipleInteger32, 0x1003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidContactItemData

2.69 PidLidContactLinkEntry

Canonical name: PidLidContactLinkEntry

Description: Contains the elements of [PidLidContacts](#) (section [2.72](#)).

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008585

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXOCNTC\]](#), [\[MS-OXOJRNL\]](#)

Alternate names: dispidContactLinkEntry

2.70 PidLidContactLinkName

Canonical name: PidLidContactLinkName

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008586

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXOJRNL\]](#)

Alternate names: dispidContactLinkName

2.71 PidLidContactLinkSearchKey

Canonical name: PidLidContactLinkSearchKey

Description: Contains the list of **SearchKeys** for a Contact object linked to by the Message object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008584

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXOCNTC\]](#), [\[MS-OXOJRNL\]](#)

Alternate names: dispidContactLinkSearchKey

2.72 PidLidContacts

Canonical name: PidLidContacts

Description: Contains the [PidTagDisplayName](#) (section [2.748](#)) of each **Address Book** EntryID referenced in the value of [PidLidContactLinkEntry](#) (section [2.69](#)).

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000853A

Data type: PtypMultipleString, 0x101F

Area: General Message Properties

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOJRNL\]](#)

Alternate names: dispidContacts

2.73 PidLidContactUserField1

Canonical name: PidLidContactUserField1

Description: Contains text used to add custom text to a business card representation of a Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000804F

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/extensionattribute1

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidContactUserField1

2.74 PidLidContactUserField2

Canonical name: PidLidContactUserField2

Description: Contains text used to add custom text to a business card representation of a Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008050

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/extensionattribute2

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidContactUserField2

2.75 PidLidContactUserField3

Canonical name: PidLidContactUserField3

Description: Contains text used to add custom text to a business card representation of a Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008051

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/extensionattribute3

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidContactUserField3

2.76 PidLidContactUserField4

Canonical name: PidLidContactUserField4

Description: Contains text used to add custom text to a business card representation of a Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008052

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/extensionattribute4

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidContactUserField4

2.77 PidLidConversationActionLastAppliedTime

Canonical name: PidLidConversationActionLastAppliedTime

Description: Contains the time (in UTC) that an **E-mail object** was last received in the **conversation**, or the last time that the user modified the **conversation action**, whichever occurs later.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085CA

Data type: PtypTime, 0x0040

Area: Conversation Actions

Defining references: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvActionLastAppliedTime

2.78 PidLidConversationActionMaxDeliveryTime

Canonical name: PidLidConversationActionMaxDeliveryTime

Description: Contains the maximum value of [PidTagMessageDeliveryTime](#) (section [2.889](#)) of all the E-mail objects modified in response to the last time the user changed a conversation action on the client.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085C8

Data type: PtypTime, 0x0040

Area: Conversation Actions

Defining references: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvActionMaxDeliveryTime

2.79 PidLidConversationActionMoveFolderEid

Canonical name: PidLidConversationActionMoveFolderEid

Description: Contains the **entry ID** for the destination folder.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085C6

Data type: PtypBinary, 0x0102

Area: Conversation Actions

Defining references: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvActionMoveFolderEid

2.80 PidLidConversationActionMoveStoreEid

Canonical name: PidLidConversationActionMoveStoreEid

Description: Contains the entry ID for a move to a folder in a different store.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085C7

Data type: PtypBinary, 0x0102

Area: Conversation Actions

Defining references: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvActionMoveStoreEid

2.81 PidLidConversationActionVersion

Canonical name: PidLidConversationActionVersion

Description: Contains the version of the conversation action **FAI** message.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085CB

Data type: PtypInteger32, 0x0003

Area: Conversation Actions

Defining references: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvActionVersion

2.82 PidLidConversationProcessed

Canonical name: PidLidConversationProcessed

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085C9

Data type: PtypInteger32, 0x0003

Area: Conversation Actions

References: [\[MS-OXOCFG\]](#)

Alternate names: dispidConvExLegacyProcessedRand

2.83 PidLidCurrentVersion

Canonical name: PidLidCurrentVersion

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008552

Data type: PtypInteger32, 0x0003

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidCurrentVersion

2.84 PidLidCurrentVersionName

Canonical name: PidLidCurrentVersionName

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008554

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidCurrentVersionName

2.85 PidLidDayInterval

Canonical name: PidLidDayInterval

Description: Identifies the day interval for the **recurrence pattern**.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000011

Data type: PtypInteger16, 0x0002

WebDAV: http://schemas.microsoft.com/mapi/day_interval

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_DAY_INTERVAL

2.86 PidLidDayOfMonth

Canonical name: PidLidDayOfMonth

Description: Identifies the day of the month for the appointment or meeting.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00001000

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/dayofmonth

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

2.87 PidLidDelegateMail

Canonical name: PidLidDelegateMail

Description: Indicates whether a **delegate** responded to the meeting request.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000009

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/delegate_mail

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_DELEGATE_MAIL

2.88 PidLidDepartment

Canonical name: PidLidDepartment

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008010

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidDepartment

2.89 PidLidDirectory

Canonical name: PidLidDirectory

Description: Specifies the directory server to be used with NetMeeting.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008242

Data type: PtypString, 0x001F

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidDirectory

2.90 PidLidDistributionListChecksum

Canonical name: PidLidDistributionListChecksum

Description: Specifies the 32-bit **cyclic redundancy check (CRC-32)** polynomial checksum, as specified in [\[ISO/IEC8802-3\]](#), calculated on the value of [PidLidDistributionListMembers](#) (section [2.91](#)).

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000804C

Data type: PtypInteger32, 0x0003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidDLChecksum

2.91 PidLidDistributionListMembers

Canonical name: PidLidDistributionListMembers

Description: Specifies the list of EntryIds of the objects corresponding to the members of the personal distribution list.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008055

Data type: PtypMultipleBinary, 0x1102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXCDATA\]](#)

Alternate names: dispidDLMembers

2.92 PidLidDistributionListName

Canonical name: PidLidDistributionListName

Description: Specifies the name of the personal distribution list.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008053

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidDLName

2.93 PidLidDistributionListOneOffMembers

Canonical name: PidLidDistributionListOneOffMembers

Description: Specifies the list of one-off EntryIds corresponding to the members of the personal distribution list.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008054

Data type: PtypMultipleBinary, 0x1102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidDLOneOffMembers

2.94 PidLidDistributionListStream

Canonical name: PidLidDistributionListStream

Description: Specifies the list of EntryIds and one-off EntryIds corresponding to the members of the personal distribution list.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008064

Data type: PtypInteger32, 0x0003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidDLStream

2.95 PidLidEmail1AddressType

Canonical name: PidLidEmail1AddressType

Description: Specifies the **address type** of an electronic address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008082

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail1AddrType

2.96 PidLidEmail1DisplayName

Canonical name: PidLidEmail1DisplayName

Description: Specifies the user-readable display name for the e-mail address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008080

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail1DisplayName

2.97 PidLidEmail1EmailAddress

Canonical name: PidLidEmail1EmailAddress

Description: Specifies the e-mail address of the contact.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008083

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail1EmailAddress

2.98 PidLidEmail1OriginalDisplayName

Canonical name: PidLidEmail1OriginalDisplayName

Description: Specifies the **SMTP** e-mail address corresponding to the e-mail address for the Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008084

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail1OriginalDisplayName

2.99 PidLidEmail1OriginalEntryId

Canonical name: PidLidEmail1OriginalEntryId

Description: Specifies the EntryId of the object corresponding to this electronic address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008085

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail1OriginalEntryID

2.100 PidLidEmail1RichTextFormat

Canonical name: PidLidEmail1RichTextFormat

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008086

Data type: PtypBoolean, 0x000B

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail1RTF

2.101 PidLidEmail2AddressType

Canonical name: PidLidEmail2AddressType

Description: Specifies the address type of the electronic address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008092

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail2AddrType

2.102 PidLidEmail2DisplayName

Canonical name: PidLidEmail2DisplayName

Description: Specifies the user-readable display name for the e-mail address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008090

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail2DisplayName

2.103 PidLidEmail2EmailAddress

Canonical name: PidLidEmail2EmailAddress

Description: Specifies the e-mail address of the contact.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008093

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail2EmailAddress

2.104 PidLidEmail2OriginalDisplayName

Canonical name: PidLidEmail2OriginalDisplayName

Description: Specifies the SMTP e-mail address corresponding to the e-mail address for the Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008094

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail2OriginalDisplayName

2.105 PidLidEmail2OriginalEntryId

Canonical name: PidLidEmail2OriginalEntryId

Description: Specifies the EntryId of the object corresponding to this electronic address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008095

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail2OriginalEntryID

2.106 PidLidEmail2RichTextFormat

Canonical name: PidLidEmail2RichTextFormat

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008096

Data type: PtypBoolean, 0x000B

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail1RTF

2.107 PidLidEmail3AddressType

Canonical name: PidLidEmail3AddressType

Description: Specifies the address type of the electronic address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A2

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail3AddrType

2.108 PidLidEmail3DisplayName

Canonical name: PidLidEmail3DisplayName

Description: Specifies the user-readable display name for the e-mail address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A0

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail3DisplayName

2.109 PidLidEmail3EmailAddress

Canonical name: PidLidEmail3EmailAddress

Description: Specifies the e-mail address of the contact.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A3

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidEmail3EmailAddress

2.110 PidLidEmail3OriginalDisplayName

Canonical name: PidLidEmail3OriginalDisplayName

Description: Specifies the SMTP e-mail address corresponding to the e-mail address for the Contact object.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A4

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: Specifies the EntryId of the object corresponding to this electronic address.

Alternate names: dispidEmail3OriginalDisplayName

2.111 PidLidEmail3OriginalEntryId

Canonical name: PidLidEmail3OriginalEntryId

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A5

Data type: PtypBinary, 0x0102

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail3OriginalEntryID

2.112 PidLidEmail3RichTextFormat

Canonical name: PidLidEmail3RichTextFormat

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080A6

Data type: PtypBoolean, 0x000B

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmail1RTF

2.113 PidLidEmailList

Canonical name: PidLidEmailList

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008027

Data type: PtypMultipleInteger32, 0x1003

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#)

Alternate names: dispidEmailList

2.114 PidLidEndRecurrenceDate

Canonical name: PidLidEndRecurrenceDate

Description: Identifies the end date of the recurrence range.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000000F

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/end_recur_date

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_END_RECUR_DATE

2.115 PidLidEndRecurrenceTime

Canonical name: PidLidEndRecurrenceTime

Description: Identifies the end time of the recurrence range.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000010

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/end_recur_time

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_END_RECUR_TIME

2.116 PidLidExceptionReplaceTime

Canonical name: PidLidExceptionReplaceTime

Description: Specifies the date and time, in UTC, within a recurrence pattern that an exception will replace.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008228

Data type: PtypTime, 0x0040

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidExceptionReplaceTime

2.117 PidLidFax1AddressType

Canonical name: PidLidFax1AddressType

Description: Contains the string value "FAX".

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080B2

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax1AddrType

2.118 PidLidFax1EmailAddress

Canonical name: PidLidFax1EmailAddress

Description: Contains a user-readable display name, followed by the "@" character, followed by a fax number.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080B3

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax1EmailAddress

2.119 PidLidFax1OriginalDisplayName

Canonical name: PidLidFax1OriginalDisplayName

Description: Contains the same value as [PidTagNormalizedSubject](#) (section [2.910](#)).

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080B4

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax1OriginalDisplayName

2.120 PidLidFax1OriginalEntryId

Canonical name: PidLidFax1OriginalEntryId

Description: Specifies a one-off EntryId corresponding to this fax address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080B5

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax1OriginalEntryID

2.121 PidLidFax2AddressType

Canonical name: PidLidFax2AddressType

Description: Contains the string value "FAX".

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080C2

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax2AddrType

2.122 PidLidFax2EmailAddress

Canonical name: PidLidFax2EmailAddress

Description: Contains a user-readable display name, followed by the "@" character, followed by a fax number.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080C3

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax2EmailAddress

2.123 PidLidFax2OriginalDisplayName

Canonical name: PidLidFax2OriginalDisplayName

Description: Contains the same value as [PidTagNormalizedSubject](#) (section [2.910](#)).

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080C4

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax2OriginalDisplayName

2.124 PidLidFax2OriginalEntryId

Canonical name: PidLidFax2OriginalEntryId

Description: Specifies a one-off EntryId corresponding to this fax address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080C5

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax2OriginalEntryID

2.125 PidLidFax3AddressType

Canonical name: PidLidFax3AddressType

Description: Contains the string value "FAX".

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080D2

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax3AddrType

2.126 PidLidFax3EmailAddress

Canonical name: PidLidFax3EmailAddress

Description: Contains a user-readable display name, followed by the "@" character, followed by a fax number.

Property set: PSETID_Addr {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080D3

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax3EmailAddress

2.127 PidLidFax3OriginalDisplayName

Canonical name: PidLidFax3OriginalDisplayName

Description: Contains the same value as [PidTagNormalizedSubject](#) (section [2.910](#)).

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080D4

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax3OriginalDisplayName

2.128 PidLidFax3OriginalEntryId

Canonical name: PidLidFax3OriginalEntryId

Description: Specifies a one-off EntryId corresponding to this fax address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080D5

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFax3OriginalEntryID

2.129 PidLidFExceptionalAttendees

Canonical name: PidLidFExceptionalAttendees

Description: Indicates that the object is a **Recurring Calendar object** with one or more exceptions, and at least one of the **Exception Embedded Message objects** has at least one **RecipientRow**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000822B

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidFExceptionalAttendees

2.130 PidLidFExceptionalBody

Canonical name: PidLidFExceptionalBody

Description: Indicates that the Exception Embedded Message object has a body that differs from the Recurring Calendar object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008206

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidFExceptionalBody

2.131 PidLidFileUnder

Canonical name: PidLidFileUnder

Description: Specifies the name under which to file a contact when displaying a list of contacts.

Property set: PSETID_Address {0006204-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008005

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFileUnder

2.132 PidLidFileUnderId

Canonical name: PidLidFileUnderId

Description: Specifies how to generate and recompute the value of the [PidLidFileUnder](#) property (section [2.131](#)) when other contact name properties change.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008006

Data type: PtypInteger32, 0x0003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFileUnderId

2.133 PidLidFileUnderList

Canonical name: PidLidFileUnderList

Description: Specifies a list of possible values for [PidLidFileUnderId](#) (section [2.132](#)).

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008026

Data type: PtypMultipleInteger32, 0x1003

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidFileUnderList

2.134 PidLidFInvited

Canonical name: PidLidFInvited

Description: Indicates whether invitations have been sent for the meeting that this Meeting object represents.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008229

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/finvited

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidFInvited

2.135 PidLidFlagRequest

Canonical name: PidLidFlagRequest

Description: Contains user-specifiable text to be associated with the flag.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008530

Data type: PtypString, 0x001F

WebDAV: urn:schemas:httpmail:messageflag, http://schemas.microsoft.com/mapi/request

Area: Flagging

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidRequest

2.136 PidLidFlagString

Canonical name: PidLidFlagString

Description: Contains an index identifying one of a set of pre-defined text strings to be associated with the flag.

Property set: PSETD_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085C0

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Alternate names: dispidFlagStringEnum

2.137 PidLidForwardInstance

Canonical name: PidLidForwardInstance

Description: Indicates whether the Meeting Request object represents an exception to a recurring series, and it was forwarded (even when forwarded by the organizer) rather than being an invitation sent by the organizer.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000820A

Data type: PtypBoolean, 0x000B

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidFwrInstance

2.138 PidLidForwardNotificationRecipients

Canonical name: PidLidForwardNotificationRecipients

Description: Contains a list of **RecipientRows** that indicate the recipients of a meeting forward.

Property set: PSETID_Appointment {0062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008261

Data type: PtypBinary, 0x0102

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidForwardNotificationRecipients

2.139 PidLidFOthersAppointment

Canonical name: PidLidFOthersAppointment

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000822F

Data type: PtypBoolean, 0x000B

Area: Meetings

References: [\[MS-XWDCAL\]](#)

Alternate names: dispidFOthersAppt, <http://schemas.microsoft.com/mapi/fothersappt>

2.140 PidLidFreeBusyLocation

Canonical name: PidLidFreeBusyLocation

Description: Specifies a **URL** path from which a client can retrieve **free/busy** information for the contact.

Property set: PSETID_Address{00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080D8

Data type: PtypString, 0x001F

WebDAV: urn:schemas:calendar:fburl

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidFreeBusyLocation

2.141 PidLidGlobalObjectId

Canonical name: PidLidGlobalObjectId

Description: Contains an ID for an object that represents an exception to a recurring series.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000003

Data type: PtypBinary, 0x0102

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXWAVLS\]](#)

Alternate names: LID_GLOBAL_OBJID

2.142 PidLidHasPicture

Canonical name: PidLidHasPicture

Description: Specifies whether the attachment has a picture.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008015

Data type: PtypBoolean, 0x000B

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidHasPicture

2.143 PidLidHomeAddress

Canonical name: PidLidHomeAddress

Description: Specifies the complete address of the contact's home address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000801A

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:homepostaladdress

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidHomeAddress

2.144 PidLidHomeAddressCountryCode

Canonical name: PidLidHomeAddressCountryCode

Description: Specifies the country code portion of the contact's home address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DA

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidHomeAddressCountryCode

2.145 PidLidHtml

Canonical name: PidLidHtml

Description: Specifies the contact's business web page URL.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000802B

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidHTML

2.146 PidLidICalendarDayOfWeekMask

Canonical name: PidLidICalendarDayOfWeekMask

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00001001

Data type: PtypInteger32, 0x0003

Area: Calendar

References: [\[MS-XWDCAL\]](#)

Alternate names: <http://schemas.microsoft.com/mapi/dayofweekmask>

2.147 PidLidInboundICalStream

Canonical name: PidLidInboundICalStream

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000827A

Data type: PtypBinary, 0x0102

Area: Calendar

References: [\[MS-OXCMAIL\]](#)

Alternate names: InboundICalStream, dispidInboundICalStream

2.148 PidLidInfoPathFormName

Canonical name: PidLidInfoPathFormName

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x85B1

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXCMAIL\]](#)

2.149 PidLidInstantMessagingAddress

Canonical name: PidLidInstantMessagingAddress

Description: Specifies the contact's instant messaging address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008062

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#)

Alternate names: dispidInstMsg

2.150 PidLidIntendedBusyStatus

Canonical name: PidLidIntendedBusyStatus

Description: Contains the value of the [PidLidBusyStatus](#) property (section [2.47](#)) on the Meeting object in the organizer's **calendar** at the time the Meeting Request object or Meeting Update object was sent.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008224

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/intendedbusystatus>

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidIntendedBusyStatus

2.151 PidLidInternetAccountName

Canonical name: PidLidInternetAccountName

Description: Specifies the user-visible e-mail account name through which the e-mail message is sent.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008580

Data type: PtypString, 0x001F

Area: General Message Properties

Defining references: [\[MS-OXOMSG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#)

Alternate names: dispidInetAcctName

2.152 PidLidInternetAccountStamp

Canonical name: PidLidInternetAccountStamp

Description: Specifies the e-mail account ID through which the e-mail message is sent.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008581

Data type: PtypString, 0x001F

Area: General Message Properties

Defining references: [\[MS-OXOMSG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#)

Alternate names: dispidInetAcctStamp

2.153 PidLidIsException

Canonical name: PidLidIsException

Description: Indicates whether the object represents an exception (including an **orphan instance**).

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000000A

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/is_exception

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_IS_EXCEPTION

2.154 PidLidIsRecurring

Canonical name: PidLidIsRecurring

Description: Specifies whether the object is associated with a recurring series.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000005

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/is_recurring

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_IS_RECURREING

2.155 PidLidIsSilent

Canonical name: PidLidIsSilent

Description: Indicates whether the user did not include any text in the body of the Meeting Response object.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000004

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/is_silent

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_IS_SILENT

2.156 PidLidLinkedTaskItems

Canonical name: PidLidLinkedTaskItems

Description: Indicates whether the user did not include any text in the body of the Meeting Response object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000820C

Data type: PtypMultipleBinary, 0x1102

Area: Tasks

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidLinkedTaskItems

2.157 PidLidLocation

Canonical name: PidLidLocation

Description: Specifies the location of the event.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008208

Data type: PtypString, 0x001F

WebDAV: urn:schemas:calendar:location

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidLocation

2.158 PidLidLogDocumentPosted

Canonical name: PidLidLogDocumentPosted

Description: Indicates whether the document was sent by e-mail or posted to a server folder during journaling.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008711

Data type: PtypBoolean, 0x000B

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogDocPosted

2.159 PidLidLogDocumentPrinted

Canonical name: PidLidLogDocumentPrinted

Description: Indicates whether the document was printed during journaling.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000870E

Data type: PtypBoolean, 0x000B

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogDocPrinted

2.160 PidLidLogDocumentRouted

Canonical name: PidLidLogDocumentRouted

Description: Indicates whether the document was sent to a routing recipient during journaling.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008710

Data type: PtypBoolean, 0x000B

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogDocRouted

2.161 PidLidLogDocumentSaved

Canonical name: PidLidLogDocumentSaved

Description: Indicates whether the document was saved during journaling.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000870F

Data type: PtypBoolean, 0x000B

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogDocSaved

2.162 PidLidLogDuration

Canonical name: PidLidLogDuration

Description: Contains the duration in minutes of the activity.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008707

Data type: PtypInteger32, 0x0003

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogDuration

2.163 PidLidLogEnd

Canonical name: PidLidLogEnd

Description: Contains the time at which the activity ended.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008708

Data type: PtypTime, 0x0040

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogEnd

2.164 PidLidLogFlags

Canonical name: PidLidLogFlags

Description: Contains metadata about the Journal object.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000870C

Data type: PtypInteger32, 0x0003

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogFlags

2.165 PidLidLogStart

Canonical name: PidLidLogStart

Description: Contains the time at which the activity began.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008706

Data type: PtypTime, 0x0040

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogStart

2.166 PidLidLogType

Canonical name: PidLidLogType

Description: Briefly describes the activity that is being recorded.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008700

Data type: PtyString, 0x001F

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogType

2.167 PidLidLogTypeDesc

Canonical name: PidLidLogTypeDesc

Description: Describes the activity that is being recorded.

Property set: PSETID_Log {0006200A-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008712

Data type: PtypString, 0x001F

Area: Journal

Defining references: [\[MS-OXOJRNL\]](#)

Alternate names: dispidLogTypeDesc

2.168 PidLidMeetingType

Canonical name: PidLidMeetingType

Description: Indicates the type of Meeting Request object or Meeting Update object.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000026

Data type: PtypInteger32, 0x0003

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidMeetingType

2.169 PidLidMeetingWorkspaceUrl

Canonical name: PidLidMeetingWorkspaceUrl

Description: Specifies the URL of the **Meeting Workspace** that is associated with a Calendar object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008209

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/meetingworkspaceurl

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidMWSURL

2.170 PidLidMonthInterval

Canonical name: PidLidMonthInterval

Description: Indicates the monthly interval of the appointment or meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000013

Data type: PtypInteger16, 0x0002

WebDAV: http://schemas.microsoft.com/mapi/month_interval

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_MONTH_INTERVAL

2.171 PidLidMonthOfYear

Canonical name: PidLidMonthOfYear

Description: Indicates the month of the year that the appointment or meeting occurs.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00001006

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/monthofyear

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

2.172 PidLidMonthOfYearMask

Canonical name: PidLidMonthOfYearMask

Description: Indicates the month of the year that the appointment or meeting occurs.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000017

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/moy_mask

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_MOY_MASK

2.173 PidLidNetShowUrl

Canonical name: PidLidNetShowUrl

Description: Specifies the URL to be launched when the user joins the meeting.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008248

Data type: PtypString, 0x001F

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidNetShowURL

2.174 PidLidNoEndDateFlag

Canonical name: PidLidNoEndDateFlag

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000100B

Data type: PtypBoolean, 0x000B

Area: Calendar

References: [\[MS-XWDCAL\]](#)

Alternate names: http://schemas.microsoft.com/mapi/fnoenddate

2.175 PidLidNonSendableBcc

Canonical name: PidLidNonSendableBcc

Description: Contains a list of all the unsendable attendees who are also resources.

Property set: PSETID_Common {00062008-0000-0000-C00-000000000046}

Property long ID (LID): 0x00008538

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/nonsendablebcc

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendableBCC

2.176 PidLidNonSendableCc

Canonical name: PidLidNonSendableCc

Description: Contains a list of all the unsendable attendees who are also optional attendees.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008537

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/nonsendablecc

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendableCC

2.177 PidLidNonSendableTo

Canonical name: PidLidNonSendableTo

Description: Contains a list of all the unsendable attendees who are also required attendees.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008536

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/nonsendableto

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendableTo

2.178 PidLidNonSendBccTrackStatus

Canonical name: PidLidNonSendBccTrackStatus

Description: Contains the value from the response table.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008545

Data type: PtypMultipleInteger32, 0x1003

WebDAV: http://schemas.microsoft.com/mapi/nonsendbcctrackstatus

Area: General Message Properties

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendBccTrackStatus

2.179 PidLidNonSendCcTrackStatus

Canonical name: PidLidNonSendCcTrackStatus

Description: Contains the value from the response table.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008544

Data type: PtypMultipleInteger32, 0x1003

WebDAV: http://schemas.microsoft.com/mapi/nonsendcctrackstatus

Area: General Message Properties

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendCcTrackStatus

2.180 PidLidNonSendToTrackStatus

Canonical name: PidLidNonSendToTrackStatus

Description: Contains the value from the response table.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008543

Data type: PtypMultipleInteger32, 0x1003

WebDAV: http://schemas.microsoft.com/mapi/nonsendtotrackstatus

Area: General Message Properties

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidNonSendToTrackStatus

2.181 PidLidNoteColor

Canonical name: PidLidNoteColor

Description: Specifies the suggested background color of the **Note object**.

Property set: PSETID_Note {0006200E-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008B00

Data type: PtypInteger32, 0x0003

Area: Sticky Notes

Defining references: [\[MS-OXONOTE\]](#)

Alternate names: dispidNoteColor

2.182 PidLidNoteHeight

Canonical name: PidLidNoteHeight

Description: Specifies the height of the visible message window in pixels.

Property set: PSETID_Note {0006200E-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008B03

Data type: PtypInteger32, 0x0003

Area: Sticky Notes

Defining references: [\[MS-OXONOTE\]](#)

Alternate names: dispidNoteHeight

2.183 PidLidNoteWidth

Canonical name: PidLidNoteWidth

Description: Specifies the width of the visible message window in pixels.

Property set: PSETID_Note {0006200E-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008B02

Data type: PtypInteger32, 0x0003

Area: Sticky Notes

Defining references: [\[MS-OXONOTE\]](#)

Alternate names: dispidNoteWidth

2.184 PidLidNoteX

Canonical name: PidLidNoteX

Description: Specifies the distance, in pixels, from the left edge of the screen that a user interface displays a Note object.

Property set: PSETID_Note {0006200E-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008B04

Data type: PtypInteger32, 0x0003

Area: Sticky Notes

Defining references: [\[MS-OXONOTE\]](#)

Alternate names: dispidNoteX

2.185 PidLidNoteY

Canonical name: PidLidNoteY

Description: Specifies the distance, in pixels, from the top edge of the screen that a user interface displays a Note object.

Property set: PSETID_Note {0006200E-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008B05

Data type: PtypInteger32, 0x0003

Area: Sticky Notes

Defining references: [\[MS-OXONOTE\]](#)

Alternate names: dispidNoteY

2.186 PidLidOccurrences

Canonical name: PidLidOccurrences

Description: Indicates the number of occurrences in the recurring appointment or meeting.

Property set: PSETID_Common {00062008-0000-000-C000-000000000046}

Property long ID (LID): 0x00001005

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/occurrences>

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

2.187 PidLidOldLocation

Canonical name: PidLidOldLocation

Description: Indicates the original value of the [PidLidLocation](#) property (section [2.157](#)) before a meeting update.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000028

Data type: PtypString, 0x001F

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidOldLocation

2.188 PidLidOldRecurrenceType

Canonical name: PidLidOldRecurrenceType

Description: Indicates the recurrence pattern for the appointment or meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000018

Data type: PtypInteger16, 0x0002

WebDAV: http://schemas.microsoft.com/mapi/recur_type

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_RECUR_TYPE

2.189 PidLidOldWhenEndWhole

Canonical name: PidLidOldWhenEndWhole

Description: Indicates the original value of the [PidLidAppointmentEndWhole](#) property (section [2.14](#)) before a meeting update.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000002A

Data type: PtypTime, 0x0040

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidOldWhenEndWhole

2.190 PidLidOldWhenStartWhole

Canonical name: PidLidOldWhenStartWhole

Description: Indicates the original value of the [PidLidAppointmentStartWhole](#) property (section [2.29](#)) before a meeting update.

Property set: PSETID_Meting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000029

Data type: PtypTime, 0x0040

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidOldWhenStartWhole

2.191 PidLidOnlinePassword

Canonical name: PidLidOnlinePassword

Description: Specifies the password for a meeting on which the property [PidLidConferencingType](#) (section [2.66](#)) has the value 0x00000002.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008249

Data type: PtypString, 0x001F

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidOnlinePassword

2.192 PidLidOptionalAttendees

Canonical name: PidLidOptionalAttendees

Description: Specifies optional attendees.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000007

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/optional_attendees

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_OPTIONAL_ATTENDEES

2.193 PidLidOrganizerAlias

Canonical name: PidLidOrganizerAlias

Description: Specifies the e-mail address of the organizer.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008243

Data type: PtypString, 0x001F

Area: Conferencing

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidOrgAlias

2.194 PidLidOriginalStoreEntryId

Canonical name: PidLidOriginalStoreEntryId

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008237

Data type: PtypBinary, 0x0102

Area: Meetings

References: [\[MS-OXOCAL\]](#)

Alternate names: dispidOrigStoreEid, <http://schemas.microsoft.com/mapi/origstoreeid>

2.195 PidLidOtherAddress

Canonical name: PidLidOtherAddress

Description: Specifies the complete address of the contact's other address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000801C

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:otherpostaladdress

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidOtherAddress

2.196 PidLidOtherAddressCountryCode

Canonical name: PidLidOtherAddressCountryCode

Description: Specifies the country code portion of the contact's other address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DC

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidOtherAddressCountryCode

2.197 PidLidOwnerCriticalChange

Canonical name: PidLidOwnerCriticalChange

Description: Specifies the date and time at which a Meeting Request object was sent by the organizer.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000001A

Data type: PtypTime, 0x0040

WebDAV: urn:schemas:calendar:dtstamp,
http://schemas.microsoft.com/mapi/owner_critical_change

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: LID_OWNER_CRITICAL_CHANGE

2.198 PidLidOwnerName

Canonical name: PidLidOwnerName

Description: Indicates the name of the owner of the **mailbox**.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000822E

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/ownername

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidOwnerName

2.199 PidLidPercentComplete

Canonical name: PidLidPercentComplete

Description: Indicates whether a time-flagged Message object is completed or not.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008102

Data type: PtypFloating64, 0x0005

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOTASK\]](#)

Alternate names: dispidPercentComplete

2.200 PidLidPostalAddressId

Canonical name: PidLidPostalAddressId

Description: Specifies which physical address is the mailing address for this contact.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008022

Data type: PtypInteger32, 0x0003

WebDAV: urn:schemas:contacts:mailingaddressid

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidPostalAddressId

2.201 PidLidPostRssChannel

Canonical name: PidLidPostRssChannel

Description: Contains the contents of the title field from the **XML** of the Atom **feed** or RSS channel.

Property set: PSETID_PostRss {0006041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008904

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssChannel

2.202 PidLidPostRssChannelLink

Canonical name: PidLidPostRssChannelLink

Description: Contains the URL of the RSS or Atom feed that the XML file came from.

Property set: PSETID_PostRss {00062041-0000-0000-C00-000000000046}

Property long ID (LID): 0x00008900

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssChanneLink

2.203 PidLidPostRssItemGuid

Canonical name: PidLidPostRssItemGuid

Description: Contains a unique **identifier** for the RSS object.

Property set: PSETID_PostRss {00062041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008903

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssItemGuid

2.204 PidLidPostRssItemHash

Canonical name: PidLidPostRssItemHash

Description: Contains a hash of the feed XML computed by using an implementation-dependent algorithm.

Property set: PSETID_PostRss {00062041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008902

Data type: PtypInteger32, 0x0003

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssItemHash

2.205 PidLidPostRssItemLink

Canonical name: PidLidPostRssItemLink

Description: Contains the URL of the link from the item.

Property set: PSETID_PostRss {00062041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008901

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssItemLink

2.206 PidLidPostRssItemXml

Canonical name: PidLidPostRssItemXml

Description: Contains the item element and all its sub-elements from an RSS feed, or the entry element and all its sub-elements from an Atom feed.

Property set: PSETID_PostRss {00062041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008905

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssItemXml

2.207 PidLidPostRssSubscription

Canonical name: PidLidPostRssSubscription

Description: Contains the user's preferred name for the subscription.

Property set: PSETID_PostRss {00062041-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008906

Data type: PtypString, 0x001F

Area: RSS

Defining references: [\[MS-OXORSS\]](#)

Alternate names: dispidPostRssSubscription

2.208 PidLidPrivate

Canonical name: PidLidPrivate

Description: Indicates whether the end-user wishes for this Message object to be hidden from other users who have access to the Message object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008506

Data type: PtypBoolean, 0x000B

Area: General Message Properties

Defining references: [MS-OXCMSG](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidPrivate

2.209 PidLidPromptSendUpdate

Canonical name: PidLidPromptSendUpdate

Description: Indicates that the Meeting Response object was out-of-date when it was received.

Property set: PSETID_Common {00062008-000-0000-C000-000000000046}

Property long ID (LID): 0x00008045

Data type: PtypBoolean, 0x000B

Area: Meeting Response

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidPromptSendUpdate

2.210 PidLidRecurrenceDuration

Canonical name: PidLidRecurrenceDuration

Description: Identifies the length, in minutes, of the appointment or meeting.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000100D

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/recurduration>

Area: Calendar

Defining references: [\[MS-XWDCAL\]](#)

2.211 PidLidRecurrencePattern

Canonical name: PidLidRecurrencePattern

Description: Specifies a description of the recurrence pattern of the Calendar object.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008232

Data type: PtypString, 0x001F

WebDAV: <http://schemas.microsoft.com/mapi/recurpattern>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidRecurPattern

2.212 PidLidRecurrenceType

Canonical name: PidLidRecurrenceType

Description: Specifies the recurrence type of the recurring series.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008231

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/recurtype>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidRecurType

2.213 PidLidRecurring

Canonical name: PidLidRecurring

Description: Specifies whether the object represents a recurring series.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008223

Data type: PtypBoolean, 0x000B

WebDAV: <http://schemas.microsoft.com/mapi/recurring>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCADATA\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidRecurring

2.214 PidLidReferenceEntryId

Canonical name: PidLidReferenceEntryId

Description: Specifies the value of the EntryId of the Contact object unless the Contact object is a copy of an earlier original.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085BD

Data type: PtypBinary, 0x0102

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidReferenceEID

2.215 PidLidReferredBy

Canonical name: PidLidReferredBy

Description: Specifies the name of the person who referred the contact to the user.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000800E

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:referredby

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidReferredBy

2.216 PidLidReminderDelta

Canonical name: PidLidReminderDelta

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008501

Data type: PtypInteger32, 0x0003

Area: Reminders

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderDelta, <http://schemas.microsoft.com/mapi/reminddelta>

2.217 PidLidReminderFileParameter

Canonical name: PidLidReminderFileParameter

Description: Specifies the filename of the sound that a client is to play when the **reminder** for that object becomes overdue.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000851F

Data type: PtypString, 0x001F

WebDAV: <http://schemas.microsoft.com/mapi/reminderfileparam>

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderFileParam

2.218 PidLidReminderOverride

Canonical name: PidLidReminderOverride

Description: Specifies whether the client is to respect the values [PidLidReminderPlaySound](#) (section 2.219) and [PidLidReminderFileParameter](#) (section 2.217), or use the default values for those properties.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000851C

Data type: PtypBoolean, 0x000B

WebDAV: <http://schemas.microsoft.com/mapi/reminderoverride>

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderOverride

2.219 PidLidReminderPlaySound

Canonical name: PidLidReminderPlaySound

Description: Specifies whether the client is to play a sound when the reminder becomes overdue.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000851E

Data type: PtypBoolean, 0x000B

WebDAV: <http://schemas.microsoft.com/mapi/reminderplaysound>

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderPlaySound

2.220 PidLidReminderSet

Canonical name: PidLidReminderSet

Description: Specifies whether a reminder is set on the object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008503

Data type: PtypBoolean, 0x000B

WebDAV: http://schemas.microsoft.com/mapi/reminderset

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderSet

2.221 PidLidReminderSignalTime

Canonical name: PidLidReminderSignalTime

Description: Specifies the point in time when a reminder transitions from pending to overdue.

Property set: PSETID_Common {00062008-000-0000-C000-000000000046}

Property long ID (LID): 0x00008560

Data type: PtypTime, 0x0040

WebDAV: http://schemas.microsoft.com/mapi/remindernexttime

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-XWDCAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidReminderNextTime

2.222 PidLidReminderTime

Canonical name: PidLidReminderTime

Description: Specifies the initial **signal time** for non-Calendar objects.

Property set: PSETID_Common {00062008-000-0000-C000-000000000046}

Property long ID (LID): 0x00008502

Data type: PtypTime, 0x0040

WebDAV: http://schemas.microsoft.com/mapi/remindertime

Area: Reminders

Defining references: [\[MS-OXORMDR\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderTime

2.223 PidLidReminderTimeDate

Canonical name: PidLidReminderTimeDate

Description: Indicates the time and date of the reminder for the appointment or meeting.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008505

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/remindertimedate>

Area: Reminders

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderTimeDate

2.224 PidLidReminderTimeTime

Canonical name: PidLidReminderTimeTime

Description: Indicates the time of the reminder for the appointment or meeting.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008504

Data type: PtypTime, 0x0040

WebDAV: <http://schemas.microsoft.com/mapi/remindertimetime>

Area: Reminders

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderTimeTime

2.225 PidLidReminderType

Canonical name: PidLidReminderType

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000851D

Data type: PtypInteger32, 0x0003

Area: Reminders

References: [\[MS-OXORMDR\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidReminderType, <http://schemas.microsoft.com/mapi/remindertype>

2.226 PidLidRemoteStatus

Canonical name: PidLidRemoteStatus

Description: Indicates the remote status of the calendar item.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008511

Data type: PtypInteger32, 0x0003

WebDAV: <http://schemas.microsoft.com/mapi/remotestatus>

Area: Run-time configuration

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: dispidRemoteStatus

2.227 PidLidRequiredAttendees

Canonical name: PidLidRequiredAttendees

Description: Identifies required attendees for the appointment or meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000006

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/required_attendees

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_REQUIRED_ATTENDEES

2.228 PidLidResourceAttendees

Canonical name: PidLidResourceAttendees

Description: Identifies resource attendees for the appointment or meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000008

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/mapi/resource_attendees

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_RESOURCE_ATTENDEES

2.229 PidLidResponseStatus

Canonical name: PidLidResponseStatus

Description: Specifies the response status of an attendee.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008218

Data type: PtypInteger32, 0x0003

WebDAV: urn:schemas:calendar:attendeestatus,
http://schemas.microsoft.com/mapi/responsestatus

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidResponseStatus

2.230 PidLidServerProcessed

Canonical name: PidLidServerProcessed

Description: Indicates whether the Meeting Request Object or Meeting Update Object has been processed.

Property set: PSETID_CalendarAsistant {11000E07-B51B-40D6-AF21-CAA85EDAB1D0}

Property long ID (LID): 0x000085CC

Data type: PtypBoolean, 0x000B

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidExchangeProcessed

2.231 PidLidServerProcessingActions

Canonical name: PidLidServerProcessingActions

Description: Indicates what processing actions have been taken on this Meeting Request Object or Meeting Update Object.

Property set: SETID_CalendarAssistant {11000E07-B51B-40D6-AF21-CAA85EDAB1D0}

Property long ID (LID): 0x000085CD

Data type: PtypInteger32, 0x0003

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Alternate names: dispidExchangeProcessingAction

2.232 PidLidSharingAnonymity

Canonical name: PidLidSharingAnonymity

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A19

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingAnonymity

2.233 PidLidSharingBindingEntryId

Canonical name: PidLidSharingBindingEntryId

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2D

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingBindingEid

2.234 PidLidSharingBrowseUrl

Canonical name: PidLidSharingBrowseUrl

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A51

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingBrowseUrl

2.235 PidLidSharingCapabilities

Canonical name: PidLidSharingCapabilities

Description: Indicates that the Message object relates to a **special folder**.

Property set: PSETID_Sharing {00062040-0000-0000-0000-000000000046}

Property long ID (LID): 0x00008A17

Data type: PtypInteger32, 0x0003

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingCaps

2.236 PidLidSharingConfigurationUrl

Canonical name: PidLidSharingConfigurationUrl

Description: Contains a zero-length string.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A24

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingConfigUrl

2.237 PidLidSharingDataRangeEnd

Canonical name: PidLidSharingDataRangeEnd

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A45

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingDataRangeEnd

2.238 PidLidSharingDataRangeStart

Canonical name: PidLidSharingDataRangeStart

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A44

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingDataRangeStart

2.239 PidLidSharingDetail

Canonical name: PidLidSharingDetail

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2B

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingDetail

2.240 PidLidSharingExtensionXml

Canonical name: PidLidSharingExtensionXml

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A21

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingExtXml

2.241 PidLidSharingFilter

Canonical name: PidLidSharingFilter

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A13

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingFilter

2.242 PidLidSharingFlags

Canonical name: PidLidSharingFlags

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0A

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingFlags

2.243 PidLidSharingFlavor

Canonical name: PidLidSharingFlavor

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A18

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingFlavor

2.244 PidLidSharingFolderEntryId

Canonical name: PidLidSharingFolderEntryId

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A15

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingFolderEid

2.245 PidLidSharingIndexEntryId

Canonical name: PidLidSharingIndexEntryId

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2E

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingIndexEid

2.246 PidLidSharingInitiatorEntryId

Canonical name: PidLidSharingInitiatorEntryId

Description: Contains the value of [PidTagEntryId](#) (section [2.761](#)) for the Address Book object of the currently logged-on user.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A09

Data type: PtypBinary, 0x0102

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingInitiatorEid

2.247 PidLidSharingInitiatorName

Canonical name: PidLidSharingInitiatorName

Description: Contains the value of [PidTagDisplayName](#) (section [2.748](#)) from the Address Book object identified by [PidLidSharingInitiatorEntryId](#) (section [2.246](#)).

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A07

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingInitiatorName

2.248 PidLidSharingInitiatorSntp

Canonical name: PidLidSharingInitiatorSntp

Description: Contains the value of [PidTagSntpAddress](#) (section [2.1135](#)) from the Address Book object identified by [PidLidSharingInitiatorEntryId](#) (section [2.246](#)).

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A08

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingInitiatorSmtp

2.249 PidLidSharingInstanceGuid

Canonical name: PidLidSharingInstanceGuid

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1C

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingInstanceGuid

2.250 PidLidSharingLastAutoSyncTime

Canonical name: PidLidSharingLastAutoSyncTime

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A55

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLastAutoSync

2.251 PidLidSharingLastSyncTime

Canonical name: PidLidSharingLastSyncTime

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1F

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLastSync

2.252 PidLidSharingLocalComment

Canonical name: PidLidSharingLocalComment

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A4D

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalComment

2.253 PidLidSharingLocalLastModificationTime

Canonical name: PidLidSharingLocalLastModificationTime

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A23

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalLastMod

2.254 PidLidSharingLocalName

Canonical name: PidLidSharingLocalName

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0F

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalName

2.255 PidLidSharingLocalPath

Canonical name: PidLidSharingLocalPath

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0E

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalPath

2.256 PidLidSharingLocalStoreUid

Canonical name: PidLidSharingLocalStoreUid

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A49

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalStoreUid

2.257 PidLidSharingLocalType

Canonical name: PidLidSharingLocalType

Description: Contains the value of [PidTagContainerClass](#) (section [2.714](#)) of the folder being shared.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A14

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalType

2.258 PidLidSharingLocalUid

Canonical name: PidLidSharingLocalUid

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A10

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingLocalUid

2.259 PidLidSharingOriginalMessageEntryId

Canonical name: PidLidSharingOriginalMessageEntryId

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A29

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingOriginalMessageEid

2.260 PidLidSharingParentBindingEntryId

Canonical name: PidLidSharingParentBindingEntryId

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A5C

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingParentBindingEid

2.261 PidLidSharingParticipants

Canonical name: PidLidSharingParticipants

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1E

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingParticipants

2.262 PidLidSharingPermissions

Canonical name: PidLidSharingPermissions

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1B

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingPermissions

2.263 PidLidSharingProviderExtension

Canonical name: PidLidSharingProviderExtension

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0B

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingProviderExtension

2.264 PidLidSharingProviderGuid

Canonical name: PidLidSharingProviderGuid

Description: Contains the value %xAE.F0.06.00.00.00.00.00.C0.00.00.00.00.00.46.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A01

Data type: PtypBinary, 0x0102

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingProviderGuid

2.265 PidLidSharingProviderName

Canonical name: PidLidSharingProviderName

Description: Contains a user-displayable name of the sharing provider identified by [PidLidSharingProviderGuid](#) (section [2.264](#)).

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A02

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingProviderName

2.266 PidLidSharingProviderUrl

Canonical name: PidLidSharingProviderUrl

Description: Contains a URL related to the sharing provider identified by [PidLidSharingProviderGuid](#) (section [2.264](#)).

Property set: PSETID_Sharing {0002040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A03

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingProviderUrl

2.267 PidLidSharingRangeEnd

Canonical name: PidLidSharingRangeEnd

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A47

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRangeEnd

2.268 PidLidSharingRangeStart

Canonical name: PidLidSharingRangeStart

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A46

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRangeStart

2.269 PidLidSharingReciprocation

Canonical name: PidLidSharingReciprocation

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1A

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingReciprocation

2.270 PidLidSharingRemoteByteSize

Canonical name: PidLidSharingRemoteByteSize

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A4B

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteByteSize

2.271 PidLidSharingRemoteComment

Canonical name: PidLidSharingRemoteComment

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2F

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteComment

2.272 PidLidSharingRemoteCrc

Canonical name: PidLidSharingRemoteCrc

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A4C

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteCrc

2.273 PidLidSharingRemoteLastModificationTime

Canonical name: PidLidSharingRemoteLastModificationTime

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A22

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteLastMod

2.274 PidLidSharingRemoteMessageCount

Canonical name: PidLidSharingRemoteMessageCount

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A4F

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteMsgCount

2.275 PidLidSharingRemoteName

Canonical name: PidLidSharingRemoteName

Description: Contains the value of [PidTagDisplayName](#) (section [2.748](#)) on the folder being shared.

Property set: PSETID_Sharing {00062040-0000-0000-C000000000000046}

Property long ID (LID): 0x00008A05

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteName

2.276 PidLidSharingRemotePass

Canonical name: PidLidSharingRemotePass

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0D

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemotePass

2.277 PidLidSharingRemotePath

Canonical name: PidLidSharingRemotePath

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A04

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemotePath

2.278 PidLidSharingRemoteStoreUid

Canonical name: PidLidSharingRemoteStoreUid

Description: Contains a hexadecimal string representation of the value of [PidTagStoreEntryId](#) (section [2.1149](#)) on the folder being shared.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A48

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteStoreUid

2.279 PidLidSharingRemoteType

Canonical name: PidLidSharingRemoteType

Description: Contains the same value as [PidLidSharingLocalType](#) (section [2.257](#)).

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A1D

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteType

2.280 PidLidSharingRemoteUid

Canonical name: PidLidSharingRemoteUid

Description: Contains the hexadecimal string representation of the value of [PidTagEntryId](#) (section [2.761](#)) on the folder being shared.

Property set: PSTID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A06

Data type: PtypString, 0x001F

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteUid

2.281 PidLidSharingRemoteUser

Canonical name: PidLidSharingRemoteUser

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A0C

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteUser

2.282 PidLidSharingRemoteVersion

Canonical name: PidLidSharingRemoteVersion

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A5B

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRemoteVersion

2.283 PidLidSharingResponseTime

Canonical name: PidLidSharingResponseTime

Description: Contains the time at which the recipient of the sharing request sent a sharing response.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A28

Data type: PtypTime, 0x0040

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Consuming references

Alternate names: dispidSharingResponseTime

2.284 PidLidSharingResponseType

Canonical name: PidLidSharingResponseType

Description: Contains the type of response with which the recipient of the sharing request responded.

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A27

Data type: PtypInteger32, 0x0003

Area: Sharing

Defining references: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingResponseType

2.285 PidLidSharingRoamLog

Canonical name: PidLidSharingRoamLog

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A4E

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingRoamLog

2.286 PidLidSharingStart

Canonical name: PidLidSharingStart

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A25

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingStart

2.287 PidLidSharingStatus

Canonical name: PidLidSharingStatus

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A00

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingStatus

2.288 PidLidSharingStop

Canonical name: PidLidSharingStop

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A26

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingStop

2.289 PidLidSharingSyncFlags

Canonical name: PidLidSharingSyncFlags

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A60

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingSyncFlags

2.290 PidLidSharingSyncInterval

Canonical name: PidLidSharingSyncInterval

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2A

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingSyncInterval

2.291 PidLidSharingTimeToLive

Canonical name: PidLidSharingTimeToLive

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A2C

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingTimeToLive

2.292 PidLidSharingTimeToLiveAuto

Canonical name: PidLidSharingTimeToLiveAuto

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A56

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingTimeToLiveAuto

2.293 PidLidSharingWorkingHoursDays

Canonical name: PidLidSharingWorkingHoursDays

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A42

Data type: PtypInteger32, 0x0003

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingWorkingHoursDays

2.294 PidLidSharingWorkingHoursEnd

Canonical name: PidLidSharingWorkingHoursEnd

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A41

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingWorkingHoursEnd

2.295 PidLidSharingWorkingHoursStart

Canonical name: PidLidSharingWorkingHoursStart

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A40

Data type: PtypTime, 0x0040

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingWorkingHoursStart

2.296 PidLidSharingWorkingHoursTimeZone

Canonical name: PidLidSharingWorkingHoursTimeZone

Property set: PSETID_Sharing {00062040-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008A43

Data type: PtypBinary, 0x0102

Area: Sharing

References: [\[MS-OXSHARE\]](#)

Alternate names: dispidSharingWorkingHoursTZ

2.297 PidLidSideEffects

Canonical name: PidLidSideEffects

Description: Specifies how a Message object is handled by the client when acting on end-user input.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008510

Data type: PtypInteger32, 0x0003

Area: Run-time configuration

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORSS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidSideEffects

2.298 PidLidSingleBodyICal

Canonical name: PidLidSingleBodyICal

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000827B

Data type: PtypBoolean, 0x000B

Area: Calendar

References: [\[MS-OXCMAIL\]](#)

Alternate names: IsSingleBodyICal, dispidIsSingleBodyICal

2.299 PidLidSmartNoAttach

Canonical name: PidLidSmartNoAttach

Description: Indicates whether the Message object has no end-user visible attachments.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008514

Data type: PtypBoolean, 0x000B

Area: Run-time configuration

Defining references: [\[MS-OXCMSG\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: dispidSmartNoAttach

2.300 PidLidSpamOriginalFolder

Canonical name: PidLidSpamOriginalFolder

Description: Specifies which folder a message was in before it was filtered into the Junk E-mail folder.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000859C

Data type: PtypBinary, 0x0102

Area: Spam

Defining references: [\[MS-OXCSPAM\]](#)

Alternate names: dispidSpamOriginalFolder

2.301 PidLidStartRecurrenceDate

Canonical name: PidLidStartRecurrenceDate

Description: Identifies the start date of the recurrence pattern.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000000D

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/start_recur_date

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_START_RECUR_DATE

2.302 PidLidStartRecurrenceTime

Canonical name: PidLidStartRecurrenceTime

Description: Identifies the start time of the recurrence pattern.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000000E

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/start_recur_time

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Alternate names: LID_START_RECUR_TIME

2.303 PidLidTaskAcceptanceState

Canonical name: PidLidTaskAcceptanceState

Description: Indicates the acceptance state of the task.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000812A

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskDelegValue

2.304 PidLidTaskAccepted

Canonical name: PidLidTaskAccepted

Description: Indicates whether a task assignee has replied to a **task request** for this **Task object**.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008108

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXOSFLD\]](#)

Alternate names: dispidTaskAccepted

2.305 PidLidTaskActualEffort

Canonical name: PidLidTaskActualEffort

Description: Indicates the number of minutes that the user actually spent working on a task.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008110

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskActualEffort

2.306 PidLidTaskAssigner

Canonical name: PidLidTaskAssigner

Description: Specifies the name of the user that last assigned the task.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008121

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskDelegator

2.307 PidLidTaskAssigners

Canonical name: PidLidTaskAssigners

Description: Contains a stack of entries, each representing a task assigner.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008117

Data type: PtypBinary, 0x0102

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskMyDelegators

2.308 PidLidTaskComplete

Canonical name: PidLidTaskComplete

Description: Indicates that the task has been completed.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000811C

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOFLAG\]](#)

Alternate names: dispidTaskComplete

2.309 PidLidTaskCustomFlags

Canonical name: PidLidTaskCustomFlags

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008139

Data type: PtypInteger32, 0x0003

Area: Tasks

References: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskActualEffort

2.310 PidLidTaskDateCompleted

Canonical name: PidLidTaskDateCompleted

Description: Specifies the date when the user completed work on the task.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000810F

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#)

Alternate names: dispidTaskDateCompleted

2.311 PidLidTaskDeadOccurrence

Canonical name: PidLidTaskDeadOccurrence

Description: Indicates whether new occurrences remain to be generated.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008109

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskDeadOccur

2.312 PidLidTaskDueDate

Canonical name: PidLidTaskDueDate

Description: Specifies the date by which the user expects work on the task to be complete.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008105

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidTaskDueDate

2.313 PidLidTaskEstimatedEffort

Canonical name: PidLidTaskEstimatedEffort

Description: Indicates the number of minutes that the user expects to work on a task.

Property set: PSETID_Task {00062003-0000-0000-C00-000000000046}

Property long ID (LID): 0x00008111

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskEstimatedEffort

2.314 PidLidTaskFCreator

Canonical name: PidLidTaskFCreator

Description: Indicates that the Task object was originally created by the action of the current user or user agent instead of by the processing of a task request.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000811E

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskFCreator

2.315 PidLidTaskFFixOffline

Canonical name: PidLidTaskFFixOffline

Description: Indicates the accuracy of [PidLidTaskOwner](#) (section [2.326](#)).

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000812C

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskFFixOffline

2.316 PidLidTaskFRecurring

Canonical name: PidLidTaskFRecurring

Description: Indicates whether the task includes a recurrence pattern.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008126

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskFRecur

2.317 PidLidTaskGlobalId

Canonical name: PidLidTaskGlobalId

Description: Contains a unique GUID for this task, used to locate an existing task upon receipt of a task response or task update.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008519

Data type: PtypBinary, 0x0102

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskGlobalObjId

2.318 PidLidTaskHistory

Canonical name: PidLidTaskHistory

Description: Indicates the type of change that was last made to the Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000811A

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskHistory

2.319 PidLidTaskLastDelegate

Canonical name: PidLidTaskLastDelegate

Description: Contains the name of the user who most recently assigned the task, or the user to whom it was most recently assigned.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008125

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskLastDelegate

2.320 PidLidTaskLastUpdate

Canonical name: PidLidTaskLastUpdate

Description: Contains the date and time of the most recent change made to the Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008115

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskLastUpdate

2.321 PidLidTaskLastUser

Canonical name: PidLidTaskLastUser

Description: Contains the name of the most recent user to have been the task owner.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008122

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskLastUser

2.322 PidLidTaskMode

Canonical name: PidLidTaskMode

Description: Specifies the assignment status of the embedded Task object.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008518

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidTaskMode

2.323 PidLidTaskMultipleRecipients

Canonical name: PidLidTaskMultipleRecipients

Description: Provides optimization hints about the recipients of a Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008120

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskMultRecips

2.324 PidLidTaskNoCompute

Canonical name: PidLidTaskNoCompute

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008124

Data type: PtypBoolean, 0x000B

Area: Tasks

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskNoCompute

2.325 PidLidTaskOrdinal

Canonical name: PidLidTaskOrdinal

Description: Provides an aid to custom sorting of Task objects.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008123

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskOrdinal

2.326 PidLidTaskOwner

Canonical name: PidLidTaskOwner

Description: Contains the name of the task owner.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000811F

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskOwner

2.327 PidLidTaskOwnership

Canonical name: PidLidTaskOwnership

Description: Indicates the role of the current user relative to the Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008129

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskOwnership

2.328 PidLidTaskRecurrence

Canonical name: PidLidTaskRecurrence

Description: Contains a **RecurrencePattern** structure that provides information about **recurring tasks**.

Property set: PSETID_Task {0006203-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008116

Data type: PtypBinary, 0x0102

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXORMDR\]](#)

Alternate names: dispidTaskRecur

2.329 PidLidTaskResetReminder

Canonical name: PidLidTaskResetReminder

Description: Indicates whether future **instances** of recurring tasks need reminders, even though [PidLidReminderSet](#) (section [2.220](#)) is 0x00.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008107

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXORMDR\]](#)

Alternate names: dispidTaskResetReminder

2.330 PidLidTaskRole

Canonical name: PidLidTaskRole

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008127

Data type: PtypString, 0x001F

Area: Tasks

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskRole

2.331 PidLidTaskStartDate

Canonical name: PidLidTaskStartDate

Description: Specifies the date on which the user expects work on the task to begin.

Property set: PSETID_Task {00062003-0000-0000-C00-000000000046}

Property long ID (LID): 0x00008104

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: dispidTaskStartDate

2.332 PidLidTaskState

Canonical name: PidLidTaskState

Description: Indicates the current assignment state of the Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000004}

Property long ID (LID): 0x00008113

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: dispidTaskState

2.333 PidLidTaskStatus

Canonical name: PidLidTaskStatus

Description: Specifies the status of a task.

Property set: PSETID_Task {00062003-0000-0000-C000-0000000000046}

Property long ID (LID): 0x00008101

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: dispidTaskStatus

2.334 PidLidTaskStatusOnComplete

Canonical name: PidLidTaskStatusOnComplete

Description: Indicates whether the task assignee has been requested to send an e-mail message update when the task assignee completes the assigned task.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008119

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskSOC

2.335 PidLidTaskUpdates

Canonical name: PidLidTaskUpdates

Description: Indicates whether the task assignee has been requested to send a task update when the assigned Task object changes.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000811B

Data type: PtypBoolean, 0x000B

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Alternate names: dispidTaskUpdates

2.336 PidLidTaskVersion

Canonical name: PidLidTaskVersion

Description: Indicates which copy is the latest update of a Task object.

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008112

Data type: PtypInteger32, 0x0003

Area: Tasks

Defining references: [\[MS-OXOTASK\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTaskVersion

2.337 PidLidTeamTask

Canonical name: PidLidTeamTask

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008103

Data type: PtypBoolean, 0x000B

Area: Tasks

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#)

Alternate names: dispidTeamTask

2.338 PidLidTimeZone

Canonical name: PidLidTimeZone

Description: Specifies information about the time zone of a recurring meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x0000000C

Data type: PtypInteger32, 0x0003

WebDAV: http://schemas.microsoft.com/mapi/time_zone

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_TIME_ZONE

2.339 PidLidTimeZoneDescription

Canonical name: PidLidTimeZoneDescription

Description: Specifies a human-readable description of the time zone that is represented by the data in the [PidLidTimeZoneStruct](#) property (section [2.340](#)).

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008234

Data type: PtypString, 0x001F

WebDAV: <http://schemas.microsoft.com/mapi/timezonedesc>

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidTimeZoneDesc

2.340 PidLidTimeZoneStruct

Canonical name: PidLidTimeZoneStruct

Description: Specifies time zone information for a recurring meeting.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008233

Data type: PtypBinary, 0x0102

WebDAV: http://schemas.microsoft.com/mapi/timezonestruct

Area: Calendar

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: dispidTimeZoneStruct

2.341 PidLidToAttendeesString

Canonical name: PidLidToAttendeesString

Description: Contains a list of all the sendable attendees who are also required attendees.

Property set: PSETID_Appointment {00062002-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000823B

Data type: PtypString, 0x001F

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: dispidToAttendeesString

2.342 PidLidToDoOrdinalDate

Canonical name: PidLidToDoOrdinalDate

Description: Contains the current time in UTC, used to determine the **sort order** of objects in a consolidated to-do list.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085A0

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#)

Alternate names: dispidToDoOrdinalDate

2.343 PidLidToDoSubOrdinal

Canonical name: PidLidToDoSubOrdinal

Description: Contains numerals "0" through "9" that are used to break a tie when [PidLidToDoOrdinalDate](#) (section [2.342](#)) is used to perform a sort of objects.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085A1

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#)

Alternate names: dispidToDoSubOrdinal

2.344 PidLidToDoTitle

Canonical name: PidLidToDoTitle

Description: Contains user-specifiable text to identify this Message object in a consolidated to-do list.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085A4

Data type: PtypString, 0x001F

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#)

Alternate names: dispidToDoTitle

2.345 PidLidTrustRecipientHighlights

Canonical name: PidLidTrustRecipientHighlights

Property set: PSETID_Task {00062003-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000823E

Data type: PtypBoolean, 0x000B

Area: Meetings

References: [\[MS-OXOCAL\]](#)

Alternate names: dispidTrustRecipHighlights

2.346 PidLidUseTnef

Canonical name: PidLidUseTnef

Description: Specifies whether **Transport Neutral Encapsulation Format (TNEF)** is to be included on a message when the message is converted from TNEF to **MIME** or SMTP format.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008582

Data type: PtypBoolean, 0x000B

Area: Run-time configuration

Defining references: [\[MS-OXOMSG\]](#)

Consuming references: [\[MS-OXCFXICS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: dispidUseTNEF

2.347 PidLidValidFlagStringProof

Canonical name: PidLidValidFlagStringProof

Description: Contains the value of [PidTagMessageDeliveryTime](#) (section [2.889](#)) when modifying [PidLidFlagRequest](#) (section [2.135](#)).

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x000085BF

Data type: PtypTime, 0x0040

Area: Tasks

Defining references: [\[MS-OXOFLAG\]](#)

Consuming references: [\[MS-OXODOC\]](#)

Alternate names: dispidValidFlagStringProof

2.348 PidLidVerbResponse

Canonical name: PidLidVerbResponse

Description: Specifies the voting option that a respondent has selected.

Property set: PSETID_Common {00062008-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008524

Data type: PtypString, 0x001F

Area: General Message Properties

Defining references: [\[MS-OXOMSG\]](#)

Alternate names: dispidVerbResponse

2.349 PidLidVerbStream

Canonical name: PidLidVerbStream

Description: Specifies what voting responses the user can make in response to the message.

Property set: PSETID_Common {00062008-0000-000-C000-000000000046}

Property long ID (LID): 0x00008520

Data type: PtypBinary, 0x0102

Area: Run-time configuration

Defining references: [\[MS-OXOMSG\]](#)

Alternate names: dispidVerbStream

2.350 PidLidWeddingAnniversaryLocal

Canonical name: PidLidWeddingAnniversaryLocal

Description: Specifies the wedding anniversary of the contact, at 0:00 in the client's local time zone and it is saved without any time zone conversions.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DF

Data type: PtypTime, 0x0040

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidApptAnniversaryLocal

2.351 PidLidWeekInterval

Canonical name: PidLidWeekInterval

Description: Identifies the number of weeks that occur between each meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00A003F1305}

Property long ID (LID): 0x00000012

Data type: PtypInteger16, 0x0002

WebDAV: http://schemas.microsoft.com/mapi/week_interval

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_WEEK_INTERVAL

2.352 PidLidWhere

Canonical name: PidLidWhere

Description: Contains the value of the [PidLidLocation](#) property (section [2.157](#)) from the associated Meeting object.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA003F1305}

Property long ID (LID): 0x00000002

Data type: PtypString, 0x001F

WebDAV: <http://schemas.microsoft.com/mapi/where>

Area: Meetings

Defining references: [\[MS-OXOCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: LID_WHERE

2.353 PidLidWorkAddress

Canonical name: PidLidWorkAddress

Description: Specifies the complete address of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000801B

Data type: PtypString, 0x001F

WebDAV: <urn:schemas:contacts:workaddress>

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddress

2.354 PidLidWorkAddressCity

Canonical name: PidLidWorkAddressCity

Description: Specifies the city or locality portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008046

Data type: PtypString, 0x001F

WebDAV: <urn:schemas:contacts:l>

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddressCity

2.355 PidLidWorkAddressCountry

Canonical name: PidLidWorkAddressCountry

Description: Specifies the country or region portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008049

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:co

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddressCountry

2.356 PidLidWorkAddressCountryCode

Canonical name: PidLidWorkAddressCountryCode

Description: Specifies the country code portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x000080DB

Data type: PtypString, 0x001F

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Alternate names: dispidWorkAddressCountryCode

2.357 PidLidWorkAddressPostalCode

Canonical name: PidLidWorkAddressPostalCode

Description: Specifies the postal code (ZIP code) portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-000-C000-000000000046}

Property long ID (LID): 0x00008048

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:postalcode

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddressPostalCode

2.358 PidLidWorkAddressPostOfficeBox

Canonical name: PidLidWorkAddressPostOfficeBox

Description: Specifies the post office box portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C00-000000000046}

Property long ID (LID): 0x0000804A

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:postofficebox

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddressPostOfficeBox

2.359 PidLidWorkAddressState

Canonical name: PidLidWorkAddressState

Description: Specifies the state or province portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008047

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:st

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#)

Alternate names: dispidWorkAddressState

2.360 PidLidWorkAddressStreet

Canonical name: PidLidWorkAddressStreet

Description: Specifies the street portion of the contact's work address.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x00008045

Data type: PtypString, 0x001F

WebDAV: urn:schemas:contacts:street

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: dispidWorkAddressStreet

2.361 PidLidYearInterval

Canonical name: PidLidYearInterval

Description: Indicates the yearly interval of the appointment or meeting.

Property set: PSETID_Meeting {6ED8DA90-450B-101B-98DA-00AA00F1305}

Property long ID (LID): 0x00000014

Data type: PtypInteger16, 0x0002

WebDAV: http://schemas.microsoft.com/mapi/year_interval

Area: Meetings

Defining references: [\[MS-XWDCAL\]](#)

Consuming references: [\[MS-OXCICAL\]](#)

Alternate names: LID_YEAR_INTERVAL

2.362 PidLidYomiCompanyName

Canonical name: PidLidYomiCompanyName

Description: Specifies the phonetic pronunciation of the contact's company name.

Property set: PSETID_Address {00062004-0000-0000-C000000000000046}

Property long ID (LID): 0x0000802E

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/yomiorganization

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDEXT\]](#)

Alternate names: dispidYomiCompanyName

2.363 PidLidYomiFirstName

Canonical name: PidLidYomiFirstName

Description: Specifies the phonetic pronunciation of the contact's given name.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000802C

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/yomifirstname

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDEXT\]](#)

Alternate names: dispidYomiFirstName

2.364 PidLidYomiLastName

Canonical name: PidLidYomiLastName

Description: Specifies the phonetic pronunciation of the contact's surname.

Property set: PSETID_Address {00062004-0000-0000-C000-000000000046}

Property long ID (LID): 0x0000802D

Data type: PtypString, 0x001F

WebDAV: http://schemas.microsoft.com/exchange/yomilastname

Area: Contact Properties

Defining references: [\[MS-OXOCNTC\]](#)

Consuming references: [\[MS-XWDEXT\]](#)

Alternate names: dispidYomiLastName

2.365 PidNameAcceptLanguage

Canonical name: PidNameAcceptLanguage

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Accept-Language

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-OXCMAIL\]](#)

Alternate names: AcceptLanguage

2.366 PidNameApplicationName

Canonical name: PidNameApplicationName

Description: Specifies the application used to open the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: AppName

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#NameOfApplication

2.367 PidNameApprovalAllowedDecisionMakers

Canonical name: PidNameApprovalAllowedDecisionMakers

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-Approval-Allowed-Decision-Makers

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMSEExchangeOrganizationDecisionMakers

2.368 PidNameApprovalRequestor

Canonical name: PidNameApprovalRequestor

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-Approval-Requestor

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMSEExchangeOrganizationApprovalRequestor

2.369 PidNameApproved

Canonical name: PidNameApproved

Description: Specifies the address of the moderator that approved and posted a message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Approved

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:approved

2.370 PidNameAttachmentMacContentType

Canonical name: PidNameAttachmentMacContentType

Property set: PSETID_Attachment {96357f7f-59e1-47d0-99a7-46515c183b54}

Property name: AttachmentMacContentType

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#)

2.371 PidNameAttachmentMacInfo

Canonical name: PidNameAttachmentMacInfo

Property set: PSETID_Attachment {96357f7f-59e1-47d0-99a7-46515c183b54}

Property name: AttachmentMacInfo

Data type: PtypBinary, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#)

2.372 PidNameAudioNotes

Canonical name: PidNameAudioNotes

Description: Contains textual annotations to a voice message after it has been delivered to the user's mailbox.

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: UMAudioNotes

Data type: PtypString, 0x001F

Area: UM

References: [\[MS-OXOUM\]](#)

Alternate names: UMAudioNotes

2.373 PidNameAuthenticatedAs

Canonical name: PidNameAuthenticatedAs

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-AuthAs

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchOrganizationAuthAs

2.374 PidNameAuthenticatedDomain

Canonical name: PidNameAuthenticatedDomain

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-AuthDomain

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchOrganizationAuthDomain

2.375 PidNameAuthenticatedMechanism

Canonical name: PidNameAuthenticatedMechanism

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-AuthMechanism

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchOrganizationAuthMechanism

2.376 PidNameAuthenticatedSource

Canonical name: PidNameAuthenticatedSource

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-AuthSource

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchOrganizationAuthSource

2.377 PidNameAuthor

Canonical name: PidNameAuthor

Description: Specifies the author of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Author

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Authorurn:schemas-microsoft-com:office:office#Author

2.378 PidNameAutomaticSpeechRecognitionData

Canonical name: PidNameAutomaticSpeechRecognitionData

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: AsrData

Data type: PtypBinary, 0x0102

Area: UM

References: [\[MS-OXOUM\]](#)

2.379 PidNameBcc

Canonical name: PidNameBcc

Description: Specifies the blind carbon copy addressees of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Bcc

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:bcc

2.380 PidNameByteCount

Canonical name: PidNameByteCount

Description: Specifies the size, in bytes, of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: ByteCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Bytesurn:schemas-microsoft-com:office:office#Bytes

2.381 PidNameCalendarAttendeeRole

Canonical name: PidNameCalendarAttendeeRole

Description: Specifies the role of the attendee.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:attendeerole

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:attendeerole

2.382 PidNameCalendarBusystatus

Canonical name: PidNameCalendarBusystatus

Description: Specifies whether the attendee is **busy** at the time of an appointment on their calendar.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:busystatus

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:busystatus

2.383 PidNameCalendarContact

Canonical name: PidNameCalendarContact

Description: Identifies the name of a contact who is an attendee of a meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:contact

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:contact

2.384 PidNameCalendarContactUrl

Canonical name: PidNameCalendarContactUrl

Description: Identifies the URL where you can access contact information in **HTML** format.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:contacturl

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:contacturl

2.385 PidNameCalendarCreated

Canonical name: PidNameCalendarCreated

Description: Identifies the date and time that the organizer created the appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:created

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:created

2.386 PidNameCalendarDescriptionUrl

Canonical name: PidNameCalendarDescriptionUrl

Description: Specifies the URL of a resource that contains a description of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:descriptionurl

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:descriptionurl

2.387 PidNameCalendarDuration

Canonical name: PidNameCalendarDuration

Description: Identifies the duration, in seconds, of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:duration

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:duration

2.388 PidNameCalendarExceptionDate

Canonical name: PidNameCalendarExceptionDate

Description: Identifies a list of dates that are exceptions to a recurring appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:exdate

Data type: PtypMultipleTime, 0x1040

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:exdate

2.389 PidNameCalendarExceptionRule

Canonical name: PidNameCalendarExceptionRule

Description: Specifies an exception **rule** for a recurring appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:exrule

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:exrule

2.390 PidNameCalendarGeoLatitude

Canonical name: PidNameCalendarGeoLatitude

Description: Specifies the geographical latitude of the location of an appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:geolatitude

Data type: PtypFloating64, 0x0005

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:geolatitude

2.391 PidNameCalendarGeoLongitude

Canonical name: PidNameCalendarGeoLongitude

Description: Specifies the geographical longitude of the location of an appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:geolongitude

Data type: PtypFloating64, 0x0005

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:geolongitude

2.392 PidNameCalendarInstanceType

Canonical name: PidNameCalendarInstanceType

Description: Specifies the type of an appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:instancetype

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:instancetype

2.393 PidNameCalendarIsOrganizer

Canonical name: PidNameCalendarIsOrganizer

Description: Specifies whether an attendee is the organizer of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:isorganizer

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:isorganizer

2.394 PidNameCalendarLastModified

Canonical name: PidNameCalendarLastModified

Description: Specifies the date and time when an appointment was last modified.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:lastmodified

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:lastmodified

2.395 PidNameCalendarLocationUrl

Canonical name: PidNameCalendarLocationUrl

Description: Specifies a URL where you can access location information in HTML format.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:locationurl

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:locationurl

2.396 PidNameCalendarMeetingStatus

Canonical name: PidNameCalendarMeetingStatus

Description: Specifies the status of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:meetingstatus

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:meetingstatus

2.397 PidNameCalendarMethod

Canonical name: PidNameCalendarMethod

Description: Specifies the **iCalendar** method that is associated with an Appointment object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:method

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:method

2.398 PidNameCalendarProductId

Canonical name: PidNameCalendarProductId

Description: Identifies the product that created the iCalendar-formatted **stream**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:prodid

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:prodid

2.399 PidNameCalendarRecurrenceIdRange

Canonical name: PidNameCalendarRecurrenceIdRange

Description: Specifies which instances of a recurring appointment are being referred to.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:recurrenceidrange

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:recurrenceidrange

2.400 PidNameCalendarReminderOffset

Canonical name: PidNameCalendarReminderOffset

Description: Identifies the number of seconds before an appointment starts that a reminder is to be displayed.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:reminderoffset

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:reminderoffset

2.401 PidNameCalendarResources

Canonical name: PidNameCalendarResources

Description: Identifies a list of resources, such as rooms and video equipment, which are available for an appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:resources

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDVSEC\]](#)

Alternate names: urn:schemas:calendar:resources

2.402 PidNameCalendarRsvp

Canonical name: PidNameCalendarRsvp

Description: Specifies whether the organizer of an appointment or meeting requested a response.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:rsvp

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:rsvp

2.403 PidNameCalendarSequence

Canonical name: PidNameCalendarSequence

Description: Specifies the sequence number of a version of an appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:sequence

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:sequence

2.404 PidNameCalendarTimeZone

Canonical name: PidNameCalendarTimeZone

Description: Specifies the time zone of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:timezone

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:timezone

2.405 PidNameCalendarTimeZoneId

Canonical name: PidNameCalendarTimeZoneId

Description: Specifies the time zone identifier of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:timezoneid

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:timezoneid

2.406 PidNameCalendarTransparent

Canonical name: PidNameCalendarTransparent

Description: Specifies whether an appointment or meeting is visible to busy time searches.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:transparent

Data type: **PtypString**, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:transparent

2.407 PidNameCalendarUid

Canonical name: PidNameCalendarUid

Description: Specifies the unique identifier of an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:uid

Data type: **PtypString**, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:uid

2.408 PidNameCalendarVersion

Canonical name: PidNameCalendarVersion

Description: Identifies the version of the iCalendar specification that is required to correctly interpret an iCalendar object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:version

Data type: **PtypString**, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:version

2.409 PidNameCategory

Canonical name: PidNameCategory

Description: Specifies the category of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Category

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Category

2.410 PidNameCc

Canonical name: PidNameCc

Description: Specifies the carbon copy addressees of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Cc

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:cc

2.411 PidNameCharacterCount

Canonical name: PidNameCharacterCount

Description: Specifies the character count of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: CharCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Characters

2.412 PidNameComments

Canonical name: PidNameComments

Description: Specifies the comments of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Comments

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Comments

2.413 PidNameCompany

Canonical name: PidNameCompany

Description: Specifies the company for which the file was created.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Company

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Company

2.414 PidNameContactsAlternateRecipient

Canonical name: PidNameContactsAlternateRecipient

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:alternaterecipient

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#)

Alternate names: urn:schemas:contacts:alternaterecipient

2.415 PidNameContactsCountry

Canonical name: PidNameContactsCountry

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:c

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:c

2.416 PidNameContactsEmail1

Canonical name: PidNameContactsEmail1

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:email1

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:email1

2.417 PidNameContactsEmail2

Canonical name: PidNameContactsEmail2

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:email2

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:email2

2.418 PidNameContactsEmail3

Canonical name: PidNameContactsEmail3

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:email3

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:email3

2.419 PidNameContactsFileAs

Canonical name: PidNameContactsFileAs

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:fileas

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#)

Alternate names: urn:schemas:contacts:fileas

2.420 PidNameContactsFileasId

Canonical name: PidNameContactsFileasId

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:fileasid

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:fileasid

2.421 PidNameContactsHomeLatitude

Canonical name: PidNameContactsHomeLatitude

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:homelatitude

Data type: PtypFloating64, 0x0005

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:homelatitude

2.422 PidNameContactsHomeLongitude

Canonical name: PidNameContactsHomeLongitude

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:homelongitude

Data type: PtypFloating64, 0x0005

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:homelongitude

2.423 PidNameContactsHomeTimeZone

Canonical name: PidNameContactsHomeTimeZone

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:hometimezone

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:hometimezone

2.424 PidNameContactsMapUrl

Canonical name: PidNameContactsMapUrl

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:mapurl

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:mapurl

2.425 PidNameContactsOtherCountryCode

Canonical name: PidNameContactsOtherCountryCode

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:othercountrycode

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:othercountrycode

2.426 PidNameContactsOtherPager

Canonical name: PidNameContactsOtherPager

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:otherpager

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:otherpager

2.427 PidNameContactsOtherTimeZone

Canonical name: PidNameContactsOtherTimeZone

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:othertimezone

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:othertimezone

2.428 PidNameContactsProxyAddresses

Canonical name: PidNameContactsProxyAddresses

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:proxyaddresses

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:proxyaddresses

2.429 PidNameContactsSecretaryUrl

Canonical name: PidNameContactsSecretaryUrl

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:contacts:secretaryurl

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:contacts:secretaryurl

2.430 PidNameContactsSourceUrl**Canonical name:** PidNameContactsSourceUrl**Property set:** PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}**Property name:** urn:schemas:contacts:sourceurl**Data type:** PtypString, 0x001F**Area:** Common**References:** [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)**Alternate names:** urn:schemas:contacts:sourceurl**2.431 PidNameContentBase****Canonical name:** PidNameContentBase**Property set:** PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}**Property name:** Content-Base**Data type:** PtypString, 0x001F**Area:** Email**References:** [\[MS-OXCMAIL\]](#)**Alternate names:** BodyContentBase**2.432 PidNameContentClass****Canonical name:** PidNameContentClass**Description:** Contains the string value "Sharing".**Property set:** PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}**Property name:** Content-Class**Data type:** PtypString, 0x001F**Area:** Email**References:** [\[MS-OXBBODY\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOUM\]](#), [\[MS-OXSHARE\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDSTRUCTDOC\]](#)**Alternate names:** DAV:contentclassDAV:contentclass, urn:schemas:mailheader:content-class**2.433 PidNameContentDisposition****Canonical name:** PidNameContentDisposition**Description:** Specifies the intended disposition of the **body part**.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-Disposition

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:content-disposition

2.434 PidNameContentID

Canonical name: PidNameContentID

Description: Specifies a unique identifier for the body part.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-ID

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:content-id

2.435 PidNameContentLanguage

Canonical name: PidNameContentLanguage

Description: Specifies the language identifier for the text content of the body part.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-Language

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:content-language

2.436 PidNameContentLocation

Canonical name: PidNameContentLocation

Description: Specifies the **Uniform Resource Identifier (URI)** that corresponds to the content of the body part.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-Location

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:content-location

2.437 PidNameContentTransferEncoding

Canonical name: PidNameContentTransferEncoding

Description: Specifies the encoding mechanism used to encode the content of the body part.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-Transfer-Encoding

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-OXCICAL\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:content-transfer-encoding

2.438 PidNameContentType

Canonical name: PidNameContentType

Description: Specifies the type of the body part's content.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Content-Type

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-OXCMAIL\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:content-type

2.439 PidNameControl

Canonical name: PidNameControl

Description: Specifies a Usenet control command.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Control

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:control

2.440 PidNameCreateDateTimeReadOnly

Canonical name: PidNameCreateDateTimeReadOnly

Description: Specifies the time that the file was first created.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: CreateDtmRo

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Created

2.441 PidNameCrossReference

Canonical name: PidNameCrossReference

Description: Contains the name of the host (with **domains** omitted) and a white-space-separated list of colon-separated pairs of newsgroup names and message numbers.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Xref

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-OXCMAIL\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:xref

2.442 PidNameDavGetContentType

Canonical name: PidNameDavGetContentType

Description: Specifies the type of the message's content.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:getcontenttype

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

2.443 PidNameDavId

Canonical name: PidNameDavId

PUBLIC

Description: Specifies a unique ID for the calendar item.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:id

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:id

2.444 PidNameDavIsCollection

Canonical name: PidNameDavIsCollection

Description: Indicates whether a Calendar object is a **collection**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:iscollection

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:iscollection

2.445 PidNameDavIsStructuredDocument

Canonical name: PidNameDavIsStructuredDocument

Description: Indicates whether a Calendar object is a structured document.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:isstructureddocument

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:isstructureddocument

2.446 PidNameDavParentName

Canonical name: PidNameDavParentName

Description: Specifies the name of the folder that contains the Calendar object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:parentname

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:parentname

2.447 PidNameDavResourceType

Canonical name: PidNameDavResourceType

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:resourcetype

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDEXT\]](#), [\[MS-XWDSEARCH\]](#), [\[MS-XWDSTRUCTDOC\]](#)

Alternate names: DAV:resourcetype

2.448 PidNameDavSearchRequest

Canonical name: PidNameDavSearchRequest

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:searchrequest

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDEXT\]](#), [\[MS-XWDSEARCH\]](#)

Alternate names: DAV:searchrequest

2.449 PidNameDavSearchType

Canonical name: PidNameDavSearchType

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:searchtype

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDSEARCH\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:searchtype

2.450 PidNameDavUid

Canonical name: PidNameDavUid

Description: Specifies the unique identifier for an item.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DAV:uid

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:uid

2.451 PidNameDisposition

Canonical name: PidNameDisposition

Description: Specifies the Mail Delivery Notification (MDN) status for the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Disposition

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:disposition

2.452 PidNameDispositionNotificationTo

Canonical name: PidNameDispositionNotificationTo

Description: Specifies the destination to which disposition notifications should be sent.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Disposition-Notification-To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:disposition-notification-to

2.453 PidNameDistribution

Canonical name: PidNameDistribution

Description: Contains a comma-separated list, similar to the Newsgroups **header** field, intended to restrict the distribution of a message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Distribution

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:distribution

2.454 PidNameDocumentParts

Canonical name: PidNameDocumentParts

Description: Specifies the title of each part of the document.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DocParts

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#PartTitles

2.455 PidNameEditTime

Canonical name: PidNameEditTime

Description: Specifies the time that the file was last edited.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: EditTime

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#TotalTime

2.456 PidNameExchangeIntendedBusyStatus

Canonical name: PidNameExchangeIntendedBusyStatus

Description: Specifies the busy status of the user during an appointment or meeting.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/intendedbusystatus

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: http://schemas.microsoft.com/exchange/intendedbusystatus

2.457 PidNameExchangeJunkEmailMoveStamp

Canonical name: PidNameExchangeJunkEmailMoveStamp

Description: Indicates that the message is not to be processed by a **spam filter**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/junkemailmovestamp

Data type: PtypInteger32, 0x0003

Area: Secure Messaging Properties

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORSS\]](#)

Alternate names: http://schemas.microsoft.com/exchange/junkemailmovestamp

2.458 PidNameExchangeModifyExceptionStructure

Canonical name: PidNameExchangeModifyExceptionStructure

Description: Specifies a structure that modifies an exception to the recurrence.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/modifyexceptionstruct

Data type: PtypBinary, 0x0102

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: http://schemas.microsoft.com/exchange/modifyexceptionstruct

2.459 PidNameExchangeMsexchembdefaultmailfolder

Canonical name: PidNameExchangeMsexchembdefaultmailfolder

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/msexchembdefaultmailfolder

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDFOLD\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/msexchembdefaultmailfolder>

2.460 PidNameExchangeMsexchembdefaultmailfoldertype

Canonical name: PidNameExchangeMsexchembdefaultmailfoldertype

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: <http://schemas.microsoft.com/exchange/msexchembdefaultmailfoldertype>

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDFOLD\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/msexchembdefaultmailfoldertype>

2.461 PidNameExchangeNoModifyExceptions

Canonical name: PidNameExchangeNoModifyExceptions

Description: Indicates whether exceptions to a recurring appointment can be modified.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: <http://schemas.microsoft.com/exchange/nomodifyexceptions>

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/nomodifyexceptions>

2.462 PidNameExchangePatternEnd

Canonical name: PidNameExchangePatternEnd

Description: Identifies the maximum time when an instance of a recurring appointment ends.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: <http://schemas.microsoft.com/exchange/patternend>

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/patternend>

2.463 PidNameExchangePatternStart

Canonical name: PidNameExchangePatternStart

Description: Identifies the absolute minimum time when an instance of a recurring appointment starts.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/patternstart

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: http://schemas.microsoft.com/exchange/patternstart

2.464 PidNameExchangePublicFolderEmailAddress

Canonical name: PidNameExchangePublicFolderEmailAddress

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/publicfolderemailaddress

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDEXT\]](#), [\[MS-XWDFOLD\]](#)

Alternate names: http://schemas.microsoft.com/exchange/publicfolderemailaddress

2.465 PidNameExchangeReminderInterval

Canonical name: PidNameExchangeReminderInterval

Description: Identifies the time, in seconds, between reminders.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/exchange/reminderinterval

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: http://schemas.microsoft.com/exchange/reminderinterval

2.466 PidNameExchDatabaseSchema

Canonical name: PidNameExchDatabaseSchema

Description: Specifies an array of URLs identifying other folders within the same store that contain schema definition items.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

PUBLIC

Property name: urn:schemas-microsoft-com:exch-data:baseschema

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas-microsoft-com:exch-data:baseschema

2.467 PidNameExchDataExpectedContentClass

Canonical name: PidNameExchDataExpectedContentClass

Description: Specifies an array of names indicating the expected content **classes** of items within a folder.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas-microsoft-com:exch-data:expected-content-class

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDSEARCH\]](#)

Alternate names: urn:schemas-microsoft-com:exch-data:expected-content-class

2.468 PidNameExchDataSchemaCollectionReference

Canonical name: PidNameExchDataSchemaCollectionReference

Description: Specifies an array of names indicating the expected content classes of items within a folder.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas-microsoft-com:exch-data:schema-collection-ref

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas-microsoft-com:exch-data:schema-collection-ref

2.469 PidNameExpires

Canonical name: PidNameExpires

Description: This property specifies the date on which the message expires.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Expires

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:expires

2.470 PidNameExpiryDate

Canonical name: PidNameExpiryDate

Description: This property specifies the expiry date of a message in an e-mail header.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Expiry-Date

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:expiry-date

2.471 PidNameFollowupTo

Canonical name: PidNameFollowupTo

Description: This property specifies the newsgroups to which follow-up messages are to be posted.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Followup-To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:followup-to

2.472 PidNameFrom

Canonical name: PidNameFrom

Description: Specifies the SMTP e-mail **alias** of the organizer of an appointment or meeting.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: From

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDCAL\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:calendar:organizer

2.473 PidNameHeadingPairs

Canonical name: PidNameHeadingPairs

Description: Specifies which group of headings are indented in the document.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: HeadingPairs

Data type: PtypBinary, 0x0102

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#HeadingPairs

2.474 PidNameHiddenCount

Canonical name: PidNameHiddenCount

Description: Specifies the hidden value of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: HiddenCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#HiddenSlides

2.475 PidNameHttpmailCalendar

Canonical name: PidNameHttpmailCalendar

Description: Specifies the URL for the **Calendar folder** for a particular user.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:calendar

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:httpmail:calendar

2.476 PidNameHttpmailCc

Canonical name: PidNameHttpmailCc

Description: Specifies the **carbon copy (CC) recipients** of the message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:cc

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:httpmail:cc

2.477 PidNameHttpmailContacts

Canonical name: PidNameHttpmailContacts

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:contacts

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDCNTC\]](#)

Alternate names: urn:schemas:httpmail:contacts

2.478 PidNameHttpmailContentMediaType

Canonical name: PidNameHttpmailContentMediaType

Description: Specifies the content media type for the body part.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:content-media-type

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:httpmail:content-media-type

2.479 PidNameHttpmailFrom

Canonical name: PidNameHttpmailFrom

Description: Specifies the person from whom the message was sent.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:from

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXCMAIL\]](#)

Alternate names: urn:schemas:httpmail:from

2.480 PidNameHttpmailFromEmail

Canonical name: PidNameHttpmailFromEmail

Description: Specifies the e-mail address from which the message was sent.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:fromemail

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:httpmail:fromemail

2.481 PidNameHttpmailHtmlDescription

Canonical name: PidNameHttpmailHtmlDescription

Description: Specifies the HTML content of the message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:htmldescription

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:httpmail:htmldescription

2.482 PidNameHttpmailOutbox

Canonical name: PidNameHttpmailOutbox

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:outbox

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:httpmail:outbox

2.483 PidNameHttpmailSendMessage

Canonical name: PidNameHttpmailSendMessage

Description: Specifies the e-mail submission URI to which outgoing e-mail is submitted.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:sendmsg

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:httpmail:sendmsg

2.484 PidNameHttpmailSubmitted

Canonical name: PidNameHttpmailSubmitted

Description: Specifies whether a message has been submitted to the **Outbox folder**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:submitted

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:httpmail:submitted

2.485 PidNameHttpmailTo

Canonical name: PidNameHttpmailTo

Description: Specifies the principle (To) message addressees.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:httpmail:to

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:httpmail:to

2.486 PidNameICalendarRecurrenceDate

Canonical name: PidNameICalendarRecurrenceDate

Description: Identifies an array of instances of a recurring appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:rdate

Data type: PtypMultipleTime, 0x1040

Area: Common

References: [\[MS-XWDEXT\]](#), [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:rdate

2.487 PidNameICalendarRecurrenceRule

Canonical name: PidNameICalendarRecurrenceRule

Description: Specifies the rule for the pattern that defines a recurring appointment.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:rrule

Data type: PtypMultipleString, 0x101F

Area: Common

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:rrule

2.488 PidNameImportance

Canonical name: PidNameImportance

Description: Indicates the level of importance for a message as either low, normal, or high.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Importance

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:importance

2.489 PidNameInReplyTo

Canonical name: PidNameInReplyTo

Description: Specifies the message to which another message is a reply.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: In-Reply-To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:in-reply-to

2.490 PidNameInstantMessagingAddress2

Canonical name: PidNameInstantMessagingAddress2

Property set: PSETID_AirSync {71035549-0739-4DCB-9163-00F0580DBBDF}

Property name: IMAddress2

Data type: PtypString, 0x001F

Area: Sync

References: [\[MS-OXVCARD\]](#)

Alternate names: IMAddress2

2.491 PidNameInstantMessagingAddress3

Canonical name: PidNameInstantMessagingAddress3

Property set: PSETID_AirSync {71035549-0739-4DCB-9163-00F0580DBBDF}

Property name: IMAddress3

Data type: PtypString, 0x001F

Area: Sync

References: [\[MS-OXVCARD\]](#)

Alternate names: IMAddress3

2.492 PidNameInternetComment

Canonical name: PidNameInternetComment

Description: Contains a comment about the purpose or content of the folder.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Comment

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:comment

2.493 PidNameInternetKeywords

Canonical name: PidNameInternetKeywords

Description: Specifies the key words for the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Keywords

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:keywords

2.494 PidNameInternetSubject

Canonical name: PidNameInternetSubject

Description: Specifies the subject of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Subject

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:subject

2.495 PidNameKeywords

Canonical name: PidNameKeywords

Description: Contains keywords or categories for the Message object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Keywords

Data type: PtypMultipleString, 0x101F

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Keywords,
http://schemas.microsoft.com/exchange/keywords-utf8

2.496 PidNameLastAuthor

Canonical name: PidNameLastAuthor

Description: Specifies the most recent author of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: LastAuthor

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#LastAuthor

2.497 PidNameLastPrinted

Canonical name: PidNameLastPrinted

Description: Specifies the time that the file was last printed.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: LastPrinted

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#LastPrinted

2.498 PidNameLastSaveDateTime

Canonical name: PidNameLastSaveDateTime

Description: Specifies the time that the file was last saved.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: LastSaveDtm

Data type: PtypTime, 0x0040

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#LastSaved

2.499 PidNameLineCount

Canonical name: PidNameLineCount

Description: Specifies the number of lines in the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: LineCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Lines

2.500 PidNameLines

Canonical name: PidNameLines

Description: Specifies the number of lines in the body of a newsgroup message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Lines

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:lines

2.501 PidNameLinksDirty

Canonical name: PidNameLinksDirty

Description: Indicates whether the links in the document are up-to-date.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: LinksDirty

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#LinksUpToDate

2.502 PidNameLocationUrl

Canonical name: PidNameLocationUrl

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: urn:schemas:calendar:locationurl

Data type: PtypString, 0x001F

Area: Calendar

References: [\[MS-OXCMAIL\]](#)

Alternate names: urn:schemas:calendar:locationurl, LocationUrl

2.503 PidNameMailSubmissionUri

Canonical name: PidNameMailSubmissionUri

Description: Specifies the URI that is used for e-mail submissions.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: MAIL:submissionuri

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-XWDMAIL\]](#)

Alternate names: MAIL:submissionuri

2.504 PidNameManager

Canonical name: PidNameManager

Description: Specifies the manager of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Manager

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Manager

2.505 PidNameMessageId

Canonical name: PidNameMessageId

Description: Specifies a unique identifier for the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Message-ID

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:message-id

2.506 PidNameMimeVersion

Canonical name: PidNameMimeVersion

Description: Specifies the version of **Multipurpose Internet Mail Extensions (MIME)** that is used to format the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Mime-Version

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:mime-version

2.507 PidNameMultimediaClipCount

Canonical name: PidNameMultimediaClipCount

Description: Specifies the number of multimedia clips in the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: MMClipCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#MultimediaClips

2.508 PidNameNewsgroups

Canonical name: PidNameNewsgroups

Description: Specifies the newsgroup addressees for the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Newsgroups

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:newsgroups

2.509 PidNameNntpPostingHost

Canonical name: PidNameNntpPostingHost

Description: Specifies the initial host to which the USENET feed was posted.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: NNTP-Posting-Host

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:nntp-posting-host

2.510 PidNameNoteCount

Canonical name: PidNameNoteCount

Description: Specifies the number of notes in the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: NoteCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Notes

2.511 PidNameOMSAccountGuid

Canonical name: PidNameOMSAccountGuid

Description: Contains the GUID of the **SMS** account used to deliver the message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: OMSAccountGuid

Data type: PtypString, 0x001F

Area: SMS

References: [\[MS-OXOSMMS\]](#)

2.512 PidNameOMSMobileModel

Canonical name: PidNameOMSMobileModel

Description: Indicates the model of the mobile device used to send the SMS or MMS message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: OMSMobileModel

Data type: PtypString, 0x001F

Area: SMS

References: [\[MS-OXOSMMS\]](#)

2.513 PidNameOMSScheduleTime

Canonical name: PidNameOMSScheduleTime

Description: Contains the time at which the client requested that the service provider send the SMS or MMS message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: OMSScheduleTime

Data type: PtypTime, 0x0040

Area: SMS

References: [\[MS-OXOSMMS\]](#)

2.514 PidNameOMSServiceType

Canonical name: PidNameOMSServiceType

Description: Contains the type of service used to send an SMS or MMS message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: OMSServiceType

Data type: PtypInteger32, 0x0003

Area: SMS

References: [\[MS-OXOSMMS\]](#)

2.515 PidNameOMSSourceType

Canonical name: PidNameOMSSourceType

Description: Contains the source of an SMS or MMS message.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: OMSSourceType

Data type: PtypInteger32, 0x0003

Area: SMS

References: [\[MS-OXOSMMS\]](#)

2.516 PidNameOrganization

Canonical name: PidNameOrganization

Description: Specifies the organization to which the sender belongs.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Organization

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:organization

2.517 PidNameOriginalRecipient

Canonical name: PidNameOriginalRecipient

Description: Specifies the e-mail address of an original recipient of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Original-Recipient

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:original-recipient

2.518 PidNameOriginalSpamConfidenceLevel

Canonical name: PidNameOriginalSpamConfidenceLevel

Property set: PSETID_Messaging {41F28F13-83F4-4114-A584-EEDB5A6B0BFF}

Property name: OriginalScl

Data type: PtypInteger32, 0x0003

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: OriginalScl

2.519 PidNameOutlookProtectionRuleOverridden

Canonical name: PidNameOutlookProtectionRuleOverridden

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-Outlook-Protection-Rule-Overridden

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMSEExchangeOutlookProtectionRuleOverridden

2.520 PidNameOutlookProtectionRuleTimestamp

Canonical name: PidNameOutlookProtectionRuleTimestamp

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: X-MS-Exchange-Organization-Outlook-Protection-Rule-Config-Timestamp

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMSEExchangeOutlookProtectionRuleConfigTimestamp

2.521 PidNameOutlookProtectionRuleVersion

Canonical name: PidNameOutlookProtectionRuleVersion

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-Outlook-Protection-Rule-Addin-Version

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMSEExchangeOutlookProtectionRuleVersion

2.522 PidNamePageCount

Canonical name: PidNamePageCount

Description: Specifies the page count of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: PageCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Pages

2.523 PidNameParagraphCount

Canonical name: PidNameParagraphCount

Description: Specifies the number of paragraphs in the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: ParCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Paragraphs

2.524 PidNamePath

Canonical name: PidNamePath

Description: Specifies the list of Network News Transfer Protocol (NNTP) hosts through which this message was relayed before arriving at the current host.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Path

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:path

2.525 PidNamePhishingStamp

Canonical name: PidNamePhishingStamp

Description: Indicates whether a message is likely to be **phishing**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: http://schemas.microsoft.com/outlook/phishingstamp

Data type: PtypInteger32, 0x0003

Area: Secure Messaging Properties

References: [\[MS-OXPHISH\]](#)

2.526 PidNamePostingVersion

Canonical name: PidNamePostingVersion

Description: Identifies the software that is used to post the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Posting-Version

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:posting-version

2.527 PidNamePresentationFormat

Canonical name: PidNamePresentationFormat

Description: Specifies the presentation format of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: PresFormat

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#PresentationFormat

2.528 PidNamePriority

Canonical name: PidNamePriority

Description: Specifies the priority of a message or appointment.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Priority

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:priority

2.529 PidNameQuarantineOriginalSender

Canonical name: PidNameQuarantineOriginalSender

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: quarantine-original-sender

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXCMAIL\]](#)

2.530 PidNameReceived

Canonical name: PidNameReceived

Description: Specifies the SMTP host received headers for a message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Received

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:received

2.531 PidNameReferences

Canonical name: PidNameReferences

Description: Specifies the USENET header used to correlate replies with their original messages.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: References

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:references

2.532 PidNameRelayVersion

Canonical name: PidNameRelayVersion

Description: Specifies the version of the program responsible for transmitting an item over the immediate link.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Relay-Version

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:relay-version

2.533 PidNameReplyBy

Canonical name: PidNameReplyBy

Description: Indicates when there should be a reply to a message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Reply-By

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:reply-by

2.534 PidNameReplyTo

Canonical name: PidNameReplyTo

Description: Specifies the address to which replies are to be sent.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Reply-To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:reply-to

2.535 PidNameReturnPath

Canonical name: PidNameReturnPath

Description: Specifies the address of the message originator.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Return-Path

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:return-path

2.536 PidNameReturnReceiptTo

Canonical name: PidNameReturnReceiptTo

Description: Specifies the address to which return receipts are to be sent.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Return-Receipt-To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:return-receipt-to

2.537 PidNameRevisionNumber

Canonical name: PidNameRevisionNumber

Description: Specifies the revision number of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: RevNumber

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Revision

2.538 PidNameRightsManagementLicense

Canonical name: PidNameRightsManagementLicense

Description: Specifies the value used to cache the **Use License** for the **rights-managed e-mail message**.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: DRMLicense

Data type: PtypMultipleBinary, 0x1102

Area: Secure Messaging Properties

References: [\[MS-OXORMMS\]](#)

2.539 PidNameRightsProtectMessage

Canonical name: PidNameRightsProtectMessage

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-MS-Exchange-Organization-RightsProtectMessage

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchangeOrganizationRightsProtectMessage

2.540 PidNameScale

Canonical name: PidNameScale

Description: Indicates whether the image is to be scaled or cropped.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Scale

Data type: PtypBoolean, 0x000B

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#ScaleCrop

2.541 PidNameSecurity

Canonical name: PidNameSecurity

Description: Specifies the security level of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Security

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Security

2.542 PidNameSender

Canonical name: PidNameSender

Description: Specifies the sender of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Sender

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:sender

2.543 PidNameSensitivity

Canonical name: PidNameSensitivity

Description: Specifies the sensitivity of the message or appointment.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Sensitivity

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:sensitivity

2.544 PidNameSlideCount

Canonical name: PidNameSlideCount

Description: Specifies the number of slides in the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: SlideCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Slides

2.545 PidNameSubject

Canonical name: PidNameSubject

Description: Specifies the subject of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Subject

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#), [\[MS-OXOCAL\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Subject

2.546 PidNameSummary

Canonical name: PidNameSummary

Description: Contains a summary of the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Summary

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:summary

2.547 PidNameTemplate

Canonical name: PidNameTemplate

Description: Specifies the **template** of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Template

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Template

2.548 PidNameThreadIndex

Canonical name: PidNameThreadIndex

Description: Identifies a particular conversation thread.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Thread-Index

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:thread-index

2.549 PidNameThreadTopic

Canonical name: PidNameThreadTopic

Description: Specifies the topic of a discussion thread.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: Thread-Topic

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:thread-topic

2.550 PidNameThumbnail

Canonical name: PidNameThumbnail

Description: Specifies the data representing the thumbnail image of the document.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Thumbnail

Data type: PtypBinary, 0x0102

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#ThumbNail

2.551 PidNameTitle

Canonical name: PidNameTitle

Description: Specifies the title of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: Title

Data type: PtypString, 0x001F

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Title

2.552 PidNameTo

Canonical name: PidNameTo

Description: Specifies the principal message addressees.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: To

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:to

2.553 PidNameWordCount

Canonical name: PidNameWordCount

Description: Specifies the word count of the file attached to the Document object.

Property set: PS_PUBLIC_STRINGS {00020329-0000-0000-C000-000000000046}

Property name: WordCount

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-OXODOC\]](#), [\[MS-XWDDOC\]](#)

Alternate names: urn:schemas-microsoft-com:office:office#Words

2.554 PidNameXCallId

Canonical name: PidNameXCallId

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-CallID

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.555 PidNameXFaxNumberOfPages

Canonical name: PidNameXFaxNumberOfPages

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-FaxNumberOfPages

Data type: PtypInteger16, 0x0002

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.556 PidNameXMailer

Canonical name: PidNameXMailer

Description: Specifies the name of the software used to send the message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Mailer

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:x-mailer

2.557 PidNameXMessageCompleted

Canonical name: PidNameXMessageCompleted

Description: Contains the header for message flag completion.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Message-Completed

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:x-message-completed

2.558 PidNameXMessageFlag

Canonical name: PidNameXMessageFlag

Description: Specifies message **flags** that indicate special characteristics of a particular message.

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Message-Flag

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: urn:schemas:mailheader:x-message-flag

2.559 PidNameXRequireProtectedPlayOnPhone

Canonical name: PidNameXRequireProtectedPlayOnPhone

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-RequireProtectedPlayOnPhone

Data type: PtypBoolean, 0x000B

Area: UM

References: [\[MS-OXOUM\]](#)

2.560 PidNameXSenderTelephoneNumber

Canonical name: PidNameXSenderTelephoneNumber

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-CallingTelephoneNumber

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.561 PidNameXSharingBrowseUrl

Canonical name: PidNameXSharingBrowseUrl

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Browse-Url

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.562 PidNameXSharingCapabilities

Canonical name: PidNameXSharingCapabilities

Description: Contains a string representation of the value of the [PidLidSharingCapabilities](#) property (section [2.235](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Capabilities

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.563 PidNameXSharingConfigUrl

Canonical name: PidNameXSharingConfigUrl

Description: Contains the same value as the [PidLidSharingConfigurationUrl](#) property (section [2.236](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Config-Url

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.564 PidNameXSharingExendedCaps

Canonical name: PidNameXSharingExendedCaps

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Exended-Caps

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.565 PidNameXSharingFlavor

Canonical name: PidNameXSharingFlavor

Description: Contains a hexadecimal string representation of the value of the [PidLidSharingFlavor](#) property (section [2.243](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Flavor

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.566 PidNameXSharingInstanceGuid

Canonical name: PidNameXSharingInstanceGuid

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Instance-Guid

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.567 PidNameXSharingLocalType

Canonical name: PidNameXSharingLocalType

Description: Contains the same value as [PidLidSharingLocalType](#) (section [2.257](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Local-Type

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.568 PidNameXSharingProviderGuid

Canonical name: PidNameXSharingProviderGuid

Description: Contains the hexadecimal string representation of the value of [PidLidSharingProviderGuid](#) (section [2.264](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Provider-Guid

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.569 PidNameXSharingProviderName

Canonical name: PidNameXSharingProviderName

Description: Contains the same value as [PidLidSharingProviderName](#) (section [2.265](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Provider-Name

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.570 PidNameXSharingProviderUrl

Canonical name: PidNameXSharingProviderUrl

Description: Contains the same value as [PidLidSharingProviderUrl](#) (section [2.266](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Provider-Url

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.571 PidNameXSharingRemoteName

Canonical name: PidNameXSharingRemoteName

Description: Contains the same value as [PidLidSharingRemoteName](#) (section [2.275](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Remote-Name

Data type: **PtypString**, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.572 PidNameXSharingRemotePath

Canonical name: PidNameXSharingRemotePath

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Remote-Path

Data type: **PtypString**, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.573 PidNameXSharingRemoteStoreUid

Canonical name: PidNameXSharingRemoteStoreUid

Description: Contains the same value as [PidLidSharingRemoteStoreUid](#) (section [2.280](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Remote-Store-Uid

Data type: **PtypString**, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.574 PidNameXSharingRemoteType

Canonical name: PidNameXSharingRemoteType

Description: Contains the same value as [PidLidSharingRemoteType](#) (section [2.279](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Remote-Type

Data type: **PtypString**, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.575 PidNameXSharingRemoteUid

Canonical name: PidNameXSharingRemoteUid

Description: Contains the same value as [PidLidSharingRemoteUid](#) (section [2.280](#)).

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Sharing-Remote-Uid

Data type: PtypString, 0x001F

Area: Sharing

References: [\[MS-OXSHARE\]](#)

2.576 PidNameXUnifiedMessagingPartnerAssignedId

Canonical name: PidNameXUnifiedMessagingPartnerAssignedId

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: X-MS-Exchange-UM-PartnerAssignedID

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchangeUMPartnerAssignedID

2.577 PidNameXUnifiedMessagingPartnerContent

Canonical name: PidNameXUnifiedMessagingPartnerContent

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: X-MS-Exchange-UM-PartnerContent

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchangeUMPartnerContent

2.578 PidNameXUnifiedMessagingPartnerContext

Canonical name: PidNameXUnifiedMessagingPartnerContext

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: X-MS-Exchange-UM-PartnerContext

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchangeUMPartnerContext

2.579 PidNameXUnifiedMessagingPartnerStatus

Canonical name: PidNameXUnifiedMessagingPartnerStatus

Property set: PSETID_UnifiedMessaging {4442858E-A9E3-4E80-B900-317A210CC15B}

Property name: X-MS-Exchange-UM-PartnerStatus

Data type: **PtypString**, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: XMsExchangeUMPartnerStatus

2.580 PidNameXUnsent

Canonical name: PidNameXUnsent

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-Unsent

Data type: **PtypString**, 0x001F

Area: Email

References: [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:mailheader:x-unsent

2.581 PidNameXVoiceMessageAttachmentOrder

Canonical name: PidNameXVoiceMessageAttachmentOrder

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-AttachmentOrder

Data type: **PtypString**, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.582 PidNameXVoiceMessageDuration

Canonical name: PidNameXVoiceMessageDuration

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-VoiceMessageDuration

Data type: PtypInteger16, 0x0002

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.583 PidNameXVoiceMessageSenderName

Canonical name: PidNameXVoiceMessageSenderName

Property set: PS_INTERNET_HEADERS {00020386-0000-0000-C000-000000000046}

Property name: X-VoiceMessageSenderName

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

2.584 PidTag7BitDisplayName

Canonical name: PidTag7BitDisplayName

Description: Contains a displayable form of the Address Book object that can be rendered in the client user's own **code page**.

Property ID: 0x39FF

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_7BIT_DISPLAY_NAME, PR_7BIT_DISPLAY_NAME_A, PR_7BIT_DISPLAY_NAME_W

2.585 PidTagAccess

Canonical name: PidTagAccess

Description: Indicates the operations available to the client for the object.

Property ID: 0x0FF4

Data type: PtypInteger32, 0x0003

Area: Access Control Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCFCOLD\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOJRN\]](#)

Alternate names: PR_ACCESS, ptagAccess

2.586 PidTagAccessLevel

Canonical name: PidTagAccessLevel

Description: Indicates the client's access level to the object.

Property ID: 0x0FF7

Data type: **PtypInteger32**, 0x0003

Area: Access Control Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#)

Alternate names: PR_ACCESS_LEVEL, ptagAccessLevel

2.587 PidTagAccount

Canonical name: PidTagAccount

Description: Contains the Address Book object's alias, which is an alternative name by which the object can be identified.

Property ID: 0x3A00

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXCFXICS\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXCMSG\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ACCOUNT, PR_ACCOUNT_A, PR_ACCOUNT_W,
urn:schemas:contacts:account

2.588 PidTagAdditionalRenEntryIds

Canonical name: PidTagAdditionalRenEntryIds

Description: Contains the indexed entry IDs for several special folders related to **conflicts**, sync issues, local failures, server failures, junk e-mail and **spam**.

Property ID: 0x36D8

Data type: **PtypMultipleBinary**, 0x1102

Area: Outlook Application

References: [\[MS-OXCSPAM\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXPHISH\]](#)

Alternate names: PR_ADDITIONAL_REN_ENTRYIDS, ptagAdditionalRenEntryIds

2.589 PidTagAdditionalRenEntryIdsEx

Canonical name: PidTagAdditionalRenEntryIdsEx

Description: Contains an array of blocks that contain the entry IDs for folders related to RSS Feeds folders, Tracked Mail Processing folder, To-Do Search folder, and Conversation Action Settings folder.

Property ID: 0x36D9

Data type: **PtypBinary**, 0x0102

Area: Outlook Application

References: [\[MS-OXOSFLD\]](#)

Alternate names: PR_ADDITIONAL_REN_ENTRYIDS_EX, ptagAdditionalRenEntryIdsEx

2.590 PidTagAddressBookAuthorizedSenders

Canonical name: PidTagAddressBookAuthorizedSenders

Description: Indicates whether delivery **restrictions** exist for a recipient.

Property ID: 0x8CD8

Data type: **PtypObject**, 0x000D

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_AUTH_ORIG

2.591 PidTagAddressBookContainerId

Canonical name: PidTagAddressBookContainerId

Description: Contains the ID of a container on an NSPI server.

Property ID: 0xFFFFD

Data type: **PtypInteger32**, 0x0003

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_CONTAINERID

2.592 PidTagAddressBookDeliveryContentLength

Canonical name: PidTagAddressBookDeliveryContentLength

Property ID: 0x806A

Data type: **PtypInteger32**, 0x0003

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DELIV_CONT_LENGTH

2.593 PidTagAddressBookDisplayNamePrintable

Canonical name: PidTagAddressBookDisplayNamePrintable

Property ID: 0x39FF

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_EMS_AB_DISPLAY_NAME_PRINTABLE,
PR_EMS_AB_DISPLAY_NAME_PRINTABLE_A, PR_EMS_AB_DISPLAY_NAME_PRINTABLE_W

2.594 PidTagAddressBookDisplayTypeExtended

Canonical name: PidTagAddressBookDisplayTypeExtended

Description: Contains a value that indicates how to display an Address Book object in a table or as a recipient on a message.

Property ID: 0x8C93

Data type: PtypInteger32, 0x0003

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DISPLAY_TYPE_EX

2.595 PidTagAddressBookDistributionListExternalMemberCount

Canonical name: PidTagAddressBookDistributionListExternalMemberCount

Description: Contains the number of external recipients in the distribution list.

Property ID: 0x8CE3

Data type: PtypInteger32, 0x0003

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DL_EXTERNAL_MEMBER_COUNT

2.596 PidTagAddressBookDistributionListMemberCount

Canonical name: PidTagAddressBookDistributionListMemberCount

Description: Contains the total number of recipients in the distribution list.

Property ID: 0x8CE2

Data type: PtypInteger32, 0x0003

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DL_TOTAL_MEMBER_COUNT

2.597 PidTagAddressBookDistributionListMemberSubmitAccepted

Canonical name: PidTagAddressBookDistributionListMemberSubmitAccepted

Description: Indicates that delivery restrictions exist for a recipient.

Property ID: 0x8073

Data type: PtypObject, 0x000D

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DL_MEM_SUBMIT_PERMS

2.598 PidTagAddressBookDistributionListMemberSubmitRejected

Canonical name: PidTagAddressBookDistributionListMemberSubmitRejected

Description: Indicates that delivery restrictions exist for a recipient.

Property ID: 0x8CDA

Data type: PtypObject, 0x000D

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DL_MEM_REJECT_PERMS

2.599 PidTagAddressBookDistributionListRejectMessagesFromDLMembers

Canonical name: PidTagAddressBookDistributionListRejectMessagesFromDLMembers

Description: Indicates that delivery restrictions exist for a recipient.

Property ID: 0x8CDB

Data type: PtypObject, 0x000D

Area: address book

Defining references: [\[MS-OXOAB\]](#)

Alternate names: PR_EMS_AB_DL_MEM_REJECT_PERMS

2.600 PidTagAddressBookEntryId

Canonical name: PidTagAddressBookEntryId

Description: Contains the name-service EntryID of a directory object that refers to a **public folder**.

Property ID: 0x663B

Data type: PtypBinary, 0x0102

Area: Address Book

References: [\[MS-OXCFOLD\]](#)

Alternate names: PR_ADDRESS_BOOK_ENTRYID, ptagAddressBookEntryId

2.601 PidTagAddressBookExtensionAttribute1

Canonical name: PidTagAddressBookExtensionAttribute1

Description: Contains information to be added to **display templates**.

Property ID: 0x802D

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_EXTENSION_ATTRIBUTE_1, PR_EMS_AB_EXTENSION_ATTRIBUTE_1_A, PR_EMS_AB_EXTENSION_ATTRIBUTE_1_W

2.602 PidTagAddressBookExtensionAttribute15

Canonical name: PidTagAddressBookExtensionAttribute15

Description: Contains information to be added to display templates.

Property ID: 0x8C61

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_EXTENSION_ATTRIBUTE_15, PR_EMS_AB_EXTENSION_ATTRIBUTE_15_A, PR_EMS_AB_EXTENSION_ATTRIBUTE_15_W

2.603 PidTagAddressBookFolderPathname

Canonical name: PidTagAddressBookFolderPathname

Description: This property has been deprecated and is to be ignored.

Property ID: 0x8004

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_FOLDER_PATHNAME, PR_EMS_AB_FOLDER_PATHNAME_A, PR_EMS_AB_FOLDER_PATHNAME_W

2.604 PidTagAddressBookHierarchicalChildDepartments

Canonical name: PidTagAddressBookHierarchicalChildDepartments

Description: Contains the child departments in a hierarchy of departments.

Property ID: 0x8C9A

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_CHILD_DEPARTMENTS

2.605 PidTagAddressBookHierarchicalDepartmentMembers

Canonical name: PidTagAddressBookHierarchicalDepartmentMembers

Description: Contains all the mail users that belong to this department.

Property ID: 0x8C97

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_DEPARTMENT_MEMBERS

2.606 PidTagAddressBookHierarchicalIsHierarchicalGroup

Canonical name: PidTagAddressBookHierarchicalIsHierarchicalGroup

Description: Indicates whether the distribution list represents a **departmental group**.

Property ID: 0x8CDD

Data type: PtypBoolean, 0x000B

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_IS_HIERARCHICAL_GROUP, PR_EMS_AB_IS_ORGANIZATIONAL

2.607 PidTagAddressBookHierarchicalParentDepartment

Canonical name: PidTagAddressBookHierarchicalParentDepartment

Description: Contains all the departments to which this department is a child.

Property ID: 0x8C99

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_PARENT_DEPARTMENT

2.608 PidTagAddressBookHierarchicalRootDepartment

Canonical name: PidTagAddressBookHierarchicalRootDepartment

Description: Contains the **DN** of the root departmental group in the department hierarchy for the organization.

Property ID: 0x8C98

Data type: PtypString8, 0x000E

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_ROOT_DEPARTMENT

2.609 PidTagAddressBookHierarchicalShowInDepartments

Canonical name: PidTagAddressBookHierarchicalShowInDepartments

Description: Lists all Department objects of which the mail user is a member.

Property ID: 0x8C94

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_SHOW_IN_DEPARTMENTS

2.610 PidTagAddressBookHomeMessageDatabase

Canonical name: PidTagAddressBookHomeMessageDatabase

Description: Contains the DN expressed in the **X500 DN** format specification.

Property ID: 0x8006

Data type: PtypString8, 0x001E

Area: Address Book

References: [\[MS-OXABREF\]](#), [\[MS-OXLDAP\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXODLGT\]](#)

Alternate names: PR_EMS_AB_HOME_MDB, PR_EMS_AB_HOME_MDB_A, PR_EMS_AB_HOME_MDB_W

2.611 PidTagAddressBookIsMaster

Canonical name: PidTagAddressBookIsMaster

Description: Contains a Boolean that is TRUE if it is possible to create Address Book objects in that container, and FALSE otherwise.

Property ID: 0xFFFFB

Data type: PtypBoolean, 0x000B

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_IS_MASTER

2.612 PidTagAddressBookIsMemberOfDistributionList

Canonical name: PidTagAddressBookIsMemberOfDistributionList

Description: List all the distribution lists for which this object is a member.

Property ID: 0x8008

Data type: PtypMultipleString8, 0x101E

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_IS_MEMBER_OF_DL, PR_EMS_AB_IS_MEMBER_OF_DL_A, PR_EMS_AB_IS_MEMBER_OF_DL_W

2.613 PidTagAddressBookManageDistributionList

Canonical name: PidTagAddressBookManageDistributionList

Description: Contains information for use in display templates for distribution lists.

Property ID: 0x6704

Data type: PtypObject, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#)

Alternate names: PR_EMS_AB_MANAGE_DL

2.614 PidTagAddressBookManager

Canonical name: PidTagAddressBookManager

Description: Contains one row that references the mail user's manager.

Property ID: 0x8005

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_MANAGER, PR_EMS_AB_MANAGER_A, PR_EMS_AB_MANAGER_W

2.615 PidTagAddressBookManagerDistinguishedName

Canonical name: PidTagAddressBookManagerDistinguishedName

Description: Contains the distinguished name (DN) of the mail user's manager.

Property ID: 0x8005

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_MANAGER_T

2.616 PidTagAddressBookMember

Canonical name: PidTagAddressBookMember

Description: Contains the members of the distribution list.

Property ID: 0x8009

Data type: PtypMultipleString8, 0x101E

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_MEMBER, PR_EMS_AB_MEMBER_A, PR_EMS_AB_MEMBER_W

2.617 PidTagAddressBookMessageId

Canonical name: PidTagAddressBookMessageId

Description: Short-term **MID** of the first message in the local site's **offline address book** public folder.

Property ID: 0x674F

Data type: PtypInteger64, 0x0014

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCSTOR\]](#)

Alternate names: ptagAddrbookMID

2.618 PidTagAddressBookModerationEnabled

Canonical name: PidTagAddressBookModerationEnabled

Description: Indicates whether moderation is enabled for the mail user of the distribution list.

Property ID: 0x8CB5

Data type: **PtypBoolean**, 0x000B

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_ENABLE_MODERATION

2.619 PidTagAddressBookNetworkAddress

Canonical name: PidTagAddressBookNetworkAddress

Description: Contains a list of names by which a server is known to the various transports in use by the network.

Property ID: 0x8170

Data type: **PtypMultipleString**, 0x101F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_NETWORK_ADDRESS, PR_EMS_AB_NETWORK_ADDRESS_A, PR_EMS_AB_NETWORK_ADDRESS_W

2.620 PidTagAddressBookObjectDistinguishedName

Canonical name: PidTagAddressBookObjectDistinguishedName

Description: Contains the distinguished name (DN) of the Address Book object in DN format.

Property ID: 0x803C

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_OBJ_DIST_NAME, PR_EMS_AB_OBJ_DIST_NAME_A, PR_EMS_AB_OBJ_DIST_NAME_W

2.621 PidTagAddressBookObjectGuid

Canonical name: PidTagAddressBookObjectGuid

Description: Contains a GUID that uniquely identifies an Address Book object.

Property ID: 0x8C6D

Data type: PtypBinary, 0x0102

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_OBJECT_GUID

2.622 PidTagAddressBookOrganizationalUnitRootDistinguishedName

Canonical name: PidTagAddressBookOrganizationalUnitRootDistinguishedName

Description: Contains the distinguished name (DN) of the Organization object of the mail user's organization.

Property ID: 0x8CA8

Data type: PtypString, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_ORG_UNIT_ROOT_DN, msExchOURoot

2.623 PidTagAddressBookOwner

Canonical name: PidTagAddressBookOwner

Description: Contains one row that references the distribution list's owner.

Property ID: 0x800C

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_OWNER_O

2.624 PidTagAddressBookOwnerBackLink

Canonical name: PidTagAddressBookOwnerBackLink

Property ID: 0x8024

Data type: PtypEmbeddedTable, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_OWNER_BL_O

2.625 PidTagAddressBookParentEntryId

Canonical name: PidTagAddressBookParentEntryId

Description: Contains the Entry ID of the parent container in a hierarchy of address book containers.

Property ID: 0xFFFFC

Data type: **PtypBinary**, 0x0102

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PARENT_ENTRYID

2.626 PidTagAddressBookPhoneticCompanyName

Canonical name: PidTagAddressBookPhoneticCompanyName

Description: Contains the phonetic representation of the [PidTagCompanyName](#) property (section [2.710](#)).

Property ID: 0x8C91

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PHONETIC_COMPANY_NAME,
PR_EMS_AB_PHONETIC_COMPANY_NAME_A, PR_EMS_AB_PHONETIC_COMPANY_NAME_W

2.627 PidTagAddressBookPhoneticDepartmentName

Canonical name: PidTagAddressBookPhoneticDepartmentName

Description: Contains the phonetic representation of the [PidTagDepartmentName](#) property (section [2.744](#)).

Property ID: 0x8C90

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PHONETIC_DEPARTMENT_NAME,
PR_EMS_AB_PHONETIC_DEPARTMENT_NAME_A, PR_EMS_AB_PHONETIC_DEPARTMENT_NAME_W

2.628 PidTagAddressBookPhoneticDisplayName

Canonical name: PidTagAddressBookPhoneticDisplayName

Description: Contains the phonetic representation of the [PidTagDisplayName](#) property (section [2.748](#)).

Property ID: 0x8C92

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PHONETIC_DISPLAY_NAME,
PR_EMS_AB_PHONETIC_DISPLAY_NAME_A, PR_EMS_AB_PHONETIC_DISPLAY_NAME_W

2.629 PidTagAddressBookPhoneticGivenName

Canonical name: PidTagAddressBookPhoneticGivenName

Description: Contains the phonetic representation of the [PidTagGivenName](#) property (section [2.793](#)).

Property ID: 0x8C8E

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PHONETIC_GIVEN_NAME,
PR_EMS_AB_PHONETIC_GIVEN_NAME_A, PR_EMS_AB_PHONETIC_GIVEN_NAME_W

2.630 PidTagAddressBookPhoneticSurname

Canonical name: PidTagAddressBookPhoneticSurname

Description: Contains the phonetic representation of the [PidTagSurname](#) property (section [2.1157](#)).

Property ID: 0x8C8F

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_PHONETIC_SURNAME, PR_EMS_AB_PHONETIC_SURNAME_A,
PR_EMS_AB_PHONETIC_SURNAME_W

2.631 PidTagAddressBookProxyAddresses

Canonical name: PidTagAddressBookProxyAddresses

PUBLIC

Description: Contains alternate e-mail addresses for the Address Book object.

Property ID: 0x800F

Data type: **PtypMultipleString**, 0x101F

Area: Address Book

References: [\[MS-OXLDAP\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODLGT\]](#)

Alternate names: PR_EMS_AB_PROXY_ADDRESSES, PR_EMS_AB_PROXY_ADDRESSES_A, PR_EMS_AB_PROXY_ADDRESSES_W

2.632 PidTagAddressBookPublicDelegates

Canonical name: PidTagAddressBookPublicDelegates

Description: Contains a list of mail users who are allowed to send e-mail on behalf of the mailbox owner.

Property ID: 0x8015

Data type: **PtypEmbeddedTable**, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#), [\[MS-OXODLGT\]](#)

Alternate names: PR_EMS_AB_PUBLIC_DELEGATES, PR_EMS_AB_PUBLIC_DELEGATES_A, PR_EMS_AB_PUBLIC_DELEGATES_W

2.633 PidTagAddressBookReports

Canonical name: PidTagAddressBookReports

Description: Lists all a mail user's direct reports.

Property ID: 0x800E

Data type: **PtypEmbeddedTable**, 0x000D

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_REPORTS, PR_EMS_AB_REPORTS_A, PR_EMS_AB_REPORTS_W

2.634 PidTagAddressBookRoomCapacity

Canonical name: PidTagAddressBookRoomCapacity

Description: Contains the maximum occupancy of the room.

Property ID: 0x0807

Data type: **PtypInteger32**, 0x0003

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_ROOM_CAPACITY

2.635 PidTagAddressBookRoomContainers

Canonical name: PidTagAddressBookRoomContainers

Description: Contains a list of DNs that represent the address book containers that hold **Resource objects**, such as conference rooms and equipment.

Property ID: 0x8C96

Data type: **PtypMultipleString**, 0x101F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_ROOM_CONTAINERS, PR_EMS_AB_ROOM_CONTAINERS_A, PR_EMS_AB_ROOM_CONTAINERS_W

2.636 PidTagAddressBookRoomDescription

Canonical name: PidTagAddressBookRoomDescription

Description: Contains a description of the Resource object.

Property ID: 0x0809

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_ROOM_DESCRIPTION, PR_EMS_AB_ROOM_DESCRIPTION_A, PR_EMS_AB_ROOM_DESCRIPTION_W

2.637 PidTagAddressBookSenderHintTranslations

Canonical name: PidTagAddressBookSenderHintTranslations

Description: Contains the **locale** ID and translations of the default **mail tip**.

Property ID: 0x8CAC

Data type: **PtypMultipleString**, 0x101F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_DL_SENDER_HINT_TRANSLATIONS_W

2.638 PidTagAddressBookSeniorityIndex

Canonical name: PidTagAddressBookSeniorityIndex

Description: Contains a signed integer that specifies the seniority order of Address Book objects that represent members of a department and are referenced by a Department object or departmental group, with larger values specifying members that are more senior.

Property ID: 0x8CA0

Data type: **PtypInteger32**, 0x0003

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_HAB_SENIORITY_INDEX, PR_EMS_AB_SENIORITY_INDEX

2.639 PidTagAddressBookTargetAddress

Canonical name: PidTagAddressBookTargetAddress

Description: Contains the foreign system e-mail address of an Address Book object.

Property ID: 0x8011

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_TARGET_ADDRESS, PR_EMS_AB_TARGET_ADDRESS_A, PR_EMS_AB_TARGET_ADDRESS_W

2.640 PidTagAddressBookUnauthorizedSenders

Canonical name: PidTagAddressBookUnauthorizedSenders

Description: Indicates whether delivery restrictions exist for this recipient.

Property ID: 0x8CD9

Data type: **PtypObject**, 0x000D

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_UNAUTH_ORIG

2.641 PidTagAddressBookX509Certificate

Canonical name: PidTagAddressBookX509Certificate

Description: Contains the ASN_1 DER encoded X_509 certificates for the mail user.

Property ID: 0x8C6A

Data type: **PtypMultipleBinary**, 0x1102

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_X509_CERT

2.642 PidTagAddressType

Canonical name: PidTagAddressType

Description: Contains the Address Book object's e-mail address type.

Property ID: 0x3002

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXPSVAL\]](#)

Alternate names: PR_ADDRTYPE, PR_ADDRTYPE_A, ptagAddrType, PR_ADDRTYPE_W

2.643 PidTagAlternateRecipientAllowed

Canonical name: PidTagAlternateRecipientAllowed

Property ID: 0x0002

Data type: **PtypBoolean**, 0x000B

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ALTERNATE_RECIPIENT_ALLOWED, ptagAlternateRecipientAllowed

2.644 PidTagAnr

Canonical name: PidTagAnr

Description: Contains a filter value used in **ambiguous name resolution**.

Property ID: 0x360C

Data type: **PtypString**, 0x001F

Area: Address Book

References: [\[MS-OXOABK\]](#)

Alternate names: PR_ANR, PR_ANR_A, PR_ANR_W

2.645 PidTagArchiveDate

Canonical name: PidTagArchiveDate

Property ID: 0x301F

Data type: PtypTime, 0x0040

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_ARCHIVE_DATE, ptagArchiveDate

2.646 PidTagArchivePeriod

Canonical name: PidTagArchivePeriod

Property ID: 0x301E

Data type: PtypInteger32, 0x0003

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_ARCHIVE_PERIOD, ptagArchivePeriod

2.647 PidTagArchiveTag

Canonical name: PidTagArchiveTag

Property ID: 0x3018

Data type: PtypBinary, 0x0102

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_ARCHIVE_TAG, ptagArchiveTag

2.648 PidTagAssistant

Canonical name: PidTagAssistant

Description: Contains the name of the mail user's administrative assistant.

Property ID: 0x3A30

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ASSISTANT, PR_ASSISTANT_A, PR_ASSISTANT_W, urn:schemas:contacts:secretarycn

2.649 PidTagAssistantTelephoneNumber

Canonical name: PidTagAssistantTelephoneNumber

Description: Contains the telephone number of the mail user's administrative assistant.

Property ID: 0x3A2E

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ASSISTANT_TELEPHONE_NUMBER, PR_ASSISTANT_TELEPHONE_NUMBER_A, PR_ASSISTANT_TELEPHONE_NUMBER_W, urn:schemas:contacts:secretaryphone

2.650 PidTagAssociated

Canonical name: PidTagAssociated

Description: Specifies whether the message being synchronized is an FAI message.

Property ID: 0x67AA

Data type: **PtypBoolean**, 0x000B

Area: Sync

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagAssociated

2.651 PidTagAttachAdditionalInformation

Canonical name: PidTagAttachAdditionalInformation

Description: Contains attachment encoding information.

Property ID: 0x370F

Data type: **PtypBinary**, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_ATTACH_ADDITIONAL_INFO

2.652 PidTagAttachContentBase

Canonical name: PidTagAttachContentBase

Description: Contains the base of a relative URI.

Property ID: 0x3711

Data type: **PtypString**, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_ATTACH_CONTENT_BASE, PR_ATTACH_CONTENT_BASE_A, PR_ATTACH_CONTENT_BASE_W

2.653 PidTagAttachContentId

Canonical name: PidTagAttachContentId

Description: Contains a content identifier unique to the Message object that matches a corresponding "cid:" URI scheme reference in the HTML body of the Message object.

Property ID: 0x3712

Data type: **PtypString**, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMMS\]](#)

Alternate names: PR_ATTACH_CONTENT_ID, PR_ATTACH_CONTENT_ID_A, PR_ATTACH_CONTENT_ID_W

2.654 PidTagAttachContentLocation

Canonical name: PidTagAttachContentLocation

Description: Contains a relative or full URI that matches a corresponding reference in the HTML body of a Message object.

Property ID: 0x3713

Data type: **PtypString**, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#)

Alternate names: PR_ATTACH_CONTENT_LOCATION, PR_ATTACH_CONTENT_LOCATION_A, PR_ATTACH_CONTENT_LOCATION_W

2.655 PidTagAttachDataBinary

Canonical name: PidTagAttachDataBinary

Description: Contains the contents of the file to be attached.

Property ID: 0x3701

Data type: **PtypBinary**, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_ATTACH_DATA_BIN, ptagAttachDataBin

2.656 PidTagAttachDataObject

Canonical name: PidTagAttachDataObject

Description: Contains the binary representation of the **Attachment object** in an application-specific format.

Property ID: 0x3701

Data type: **PtypObject**, 0x000D

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOCAL\]](#)

Alternate names: PR_ATTACH_DATA_OBJ, ptagAttachDataObj

2.657 PidTagAttachEncoding

Canonical name: PidTagAttachEncoding

Description: Contains encoding information about the Attachment object.

Property ID: 0x3702

Data type: **PtypBinary**, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ATTACH_ENCODING

2.658 PidTagAttachExtension

Canonical name: PidTagAttachExtension

Description: Contains a filename extension that indicates the document type of an attachment.

Property ID: 0x3703

Data type: **PtypString**, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODOC\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_EXTENSION, PR_ATTACH_EXTENSION_A, PR_ATTACH_EXTENSION_W

2.659 PidTagAttachFilename

Canonical name: PidTagAttachFilename

Description: Contains the **8.3 name** of [PidTagAttachLongFilename](#) (section [2.661](#)).

Property ID: 0x3704

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMIME\]](#), [\[MS-XPFOAB\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_FILENAME, PR_ATTACH_FILENAME_A, ptagAttachFilename, PR_ATTACH_FILENAME_W

2.660 PidTagAttachFlags

Canonical name: PidTagAttachFlags

Description: Indicates which body formats might reference this attachment when rendering data.

Property ID: 0x3714

Data type: PtypInteger32, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_FLAGS

2.661 PidTagAttachLongFilename

Canonical name: PidTagAttachLongFilename

Description: Contains the full filename and extension of the Attachment object.

Property ID: 0x3707

Data type: PtypString, 0x001F

Area: Message Attachment Properties Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOUM\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_LONG_FILENAME, PR_ATTACH_LONG_FILENAME_A, PR_ATTACH_LONG_FILENAME_W, urn:schemas:httpmail:attachmentfilename

2.662 PidTagAttachLongPathname

Canonical name: PidTagAttachLongPathname

Description: Contains the fully qualified path and filename with extension.

Property ID: 0x370D

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#)

Alternate names: PR_ATTACH_LONG_PATHNAME, PR_ATTACH_LONG_PATHNAME_A, ptagAttachLongPathname, PR_ATTACH_LONG_PATHNAME_W

2.663 PidTagAttachmentContactPhoto

Canonical name: PidTagAttachmentContactPhoto

Description: Indicates that a contact photo attachment is attached to a Contact object.

Property ID: 0x7FFF

Data type: PtypBoolean, 0x000B

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_ATTACHMENT_CONTACTPHOTO

2.664 PidTagAttachmentFlags

Canonical name: PidTagAttachmentFlags

Description: Indicates special handling for an Attachment object.

Property ID: 0x7FFD

Data type: PtypInteger32, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOJRN\]](#)

Alternate names: PR_ATTACHMENT_FLAGS, ptagAttachmentFlags

2.665 PidTagAttachmentHidden

Canonical name: PidTagAttachmentHidden

Description: Indicates whether an Attachment object is hidden from the end user.

Property ID: 0x7FFE

Data type: PtypBoolean, 0x000B

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXRTFEX\]](#)

Alternate names: PR_ATTACHMENT_HIDDEN

2.666 PidTagAttachmentLinkId

Canonical name: PidTagAttachmentLinkId

Description: Contains the type of Message object to which this attachment is linked.

Property ID: 0x7FFA

Data type: **PtypInteger32**, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_ATTACHMENT_LINKID, ptagAttachmentLinkId

2.667 PidTagAttachMethod

Canonical name: PidTagAttachMethod

Description: Represents the way the contents of an attachment are accessed.

Property ID: 0x3705

Data type: **PtypInteger32**, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXPFOAB\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_METHOD, ptagAttachMethod

2.668 PidTagAttachMimeTag

Canonical name: PidTagAttachMimeTag

Description: Contains a content-type MIME header.

Property ID: 0x370E

Data type: **PtypString**, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOUM\]](#)

Alternate names: PR_ATTACH_MIME_TAG, PR_ATTACH_MIME_TAG_A, PR_ATTACH_MIME_TAG_W

2.669 PidTagAttachNumber

Canonical name: PidTagAttachNumber

Description: Identifies the Attachment object within its Message object.

Property ID: 0x0E21

Data type: PtypInteger32, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCROPS\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXRTFEX\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_NUM, ptagAttachNum

2.670 PidTagAttachPathname

Canonical name: PidTagAttachPathname

Description: Contains the 8.3 name of [PidTagAttachLongPathname](#) (section [2.662](#)).

Property ID: 0x3708

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#)

Alternate names: PR_ATTACH_PATHNAME, PR_ATTACH_PATHNAME_A, ptagAttachPathname, PR_ATTACH_PATHNAME_W

2.671 PidTagAttachPayloadClass

Canonical name: PidTagAttachPayloadClass

Property ID: 0x371A

Data type: PtypString, 0x001F

Area: Outlook Application

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_ATTACH_PAYLOAD_CLASS, PR_ATTACH_PAYLOAD_CLASS_A, PR_ATTACH_PAYLOAD_CLASS_W, ptagAttachPayloadClass

2.672 PidTagAttachPayloadProviderGuidString

Canonical name: PidTagAttachPayloadProviderGuidString

Property ID: 0x3719

Data type: PtypString, 0x001F

Area: Outlook Application

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_ATTACH_PAYLOAD_PROV_GUID_STR, PR_ATTACH_PAYLOAD_PROV_GUID_STR_A, PR_ATTACH_PAYLOAD_PROV_GUID_STR_W

2.673 PidTagAttachRendering

Canonical name: PidTagAttachRendering

Description: Contains a Windows Metafile as specified in [\[MS-WMF\]](#) for the Attachment object.

Property ID: 0x3709

Data type: PtypBinary, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ATTACH_RENDERING, ptagAttachRendering

2.674 PidTagAttachSize

Canonical name: PidTagAttachSize

Description: Contains the size in bytes consumed by the Attachment object on the server.

Property ID: 0x0E20

Data type: PtypInteger32, 0x0003

Area: Message Attachment Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_ATTACH_SIZE, ptagAttachSize

2.675 PidTagAttachTag

Canonical name: PidTagAttachTag

Description: Contains the identifier information for the application which supplied the Attachment object's data.

Property ID: 0x370A

Data type: PtypBinary, 0x0102

Area: Message Attachment Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ATTACH_TAG

2.676 PidTagAttachTransportName

Canonical name: PidTagAttachTransportName

Description: Contains the name of an attachment file, modified so that it can be correlated with TNEF messages.

Property ID: 0x370C

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ATTACH_TRANSPORT_NAME, PR_ATTACH_TRANSPORT_NAME_A, PR_ATTACH_TRANSPORT_NAME_W

2.677 PidTagAttributeHidden

Canonical name: PidTagAttributeHidden

Description: Specifies the hide or show status of a folder.

Property ID: 0x10F4

Data type: PtypBoolean, 0x000B

Area: Access Control Properties Property set

References: [\[MS-OXCFOLD\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ATTR_HIDDEN, ptagAttrHidden, DAV:ishidden

2.678 PidTagAttributeReadOnly

Canonical name: PidTagAttributeReadOnly

Property ID: 0x10F6

Data type: PtypBoolean, 0x000B

Area: Access Control Properties Property set

References: [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ATTR_READONLY, ptagAttrReadOnly, DAV:isreadonly

2.679 PidTagAttributeSystem

Canonical name: PidTagAttributeSystem

Property ID: 0x10F5

Data type: PtypBoolean, 0x000B

Area: Access Control Properties

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_ATTR_SYSTEM, ptagAttrSystem

2.680 PidTagAutoForwarded

Canonical name: PidTagAutoForwarded

Property ID: 0x0005

Data type: PtypBoolean, 0x000B

Area: General Report Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_AUTO_FORWARDED, ptagAutoForwarded

2.681 PidTagAutoForwardComment

Canonical name: PidTagAutoForwardComment

Description: Contains text included in an automatically generated message.

Property ID: 0x0004

Data type: PtypString, 0x0003

Area: General Report Properties

References: [\[MS-OXCMSG\]](#)

Alternate names: PR_AUTO_FORWARD_COMMENT, PR_AUTO_FORWARD_COMMENT_A, PR_AUTO_FORWARD_COMMENT_W

2.682 PidTagAutoResponseSuppress

Canonical name: PidTagAutoResponseSuppress

Property ID: 0x3FDF

Data type: PtypInteger32, 0x0003

Area: Email

References: [\[MS-OXCMAIL\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_AUTO_RESPONSE_SUPPRESS, ptagAutoResponseSuppress

2.683 PidTagBirthday

Canonical name: PidTagBirthday

Description: Contains the date of the mail user's birthday at 12:00 AM.

Property ID: 0x3A42

Data type: PtypTime, 0x0040

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_BIRTHDAY, urn:schemas:contacts:bday

2.684 PidTagBlockStatus

Canonical name: PidTagBlockStatus

Description: Indicates the user's preference for viewing external content (such as links to images on an **HTTP** server) in the **message body**.

Property ID: 0x1096

Data type: **PtypInteger32**, 0x0003

Area: Secure Messaging Properties

References: [\[MS-OXCMSG\]](#)

Alternate names: PR_BLOCK_STATUS, ptagBlockStatus

2.685 PidTagBody

Canonical name: PidTagBody

Description: Contains message body text in **plain text** format.

Property ID: 0x1000

Data type: **PtypString**, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXBBODY\]](#), [\[MS-OXCDATA\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXPROTO\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_BODY, PR_BODY_A, ptagBody, PR_BODY_W, urn:schemas:httpmail:textdescription

2.686 PidTagBodyContentId

Canonical name: PidTagBodyContentId

Property ID: 0x1015

Data type: **PtypString**, 0x001F

Area: Exchange

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_BODY_CONTENT_ID, PR_BODY_CONTENT_ID_A, PR_BODY_CONTENT_ID_W

2.687 PidTagBodyContentLocation

Canonical name: PidTagBodyContentLocation

Property ID: 0x1014

Data type: **PtypString**, 0x001F

Area: MIME Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_BODY_CONTENT_LOCATION, PR_BODY_CONTENT_LOCATION_A, PR_BODY_CONTENT_LOCATION_W

2.688 PidTagBodyHtml

Canonical name: PidTagBodyHtml

Property ID: 0x1013

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXRTFEX\]](#)

Alternate names: PR_BODY_HTML, PR_BODY_HTML_A, ptagBodyHtml, PR_BODY_HTML_W

2.689 PidTagBusiness2TelephoneNumber

Canonical name: PidTagBusiness2TelephoneNumber

Description: Contains a secondary telephone number at the mail user's place of business.

Property ID: 0x3A1B

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: "PR_BUSINESS2_TELEPHONE_NUMBER, PR_BUSINESS2_TELEPHONE_NUMBER_A, PR_BUSINESS2_TELEPHONE_NUMBER_W, PR_OFFICE2_TELEPHONE_NUMBER, urn:schemas:contacts:telephonenumber2

2.690 PidTagBusiness2TelephoneNumbers

Canonical name: PidTagBusiness2TelephoneNumbers

Description: Contains secondary telephone numbers at the mail user's place of business.

Property ID: 0x3A1B

Data type: PtypMultipleString, 0x101F

Area: Contact Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_BUSINESS2_TELEPHONE_NUMBER_A_MV

2.691 PidTagBusinessFaxNumber

Canonical name: PidTagBusinessFaxNumber

Description: Contains the telephone number of the mail user's business fax machine.

Property ID: 0x3A24

Data type: **PtypString**, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_BUSINESS_FAX_NUMBER, PR_BUSINESS_FAX_NUMBER_A, PR_BUSINESS_FAX_NUMBER_W, urn:schemas:contacts:facsimiletelephonenumber

2.692 PidTagBusinessHomePage

Canonical name: PidTagBusinessHomePage

Description: Contains the Web address (URL) of the mail user's business home page.

Property ID: 0x3A51

Data type: **PtypString**, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_BUSINESS_HOME_PAGE, PR_BUSINESS_HOME_PAGE_A, PR_BUSINESS_HOME_PAGE_W, urn:schemas:contacts:businesshomepageurn:schemas:contacts:businesshomepage

2.693 PidTagBusinessTelephoneNumber

Canonical name: PidTagBusinessTelephoneNumber

Description: Contains the primary telephone number of the mail user's place of business.

Property ID: 0x3A08

Data type: **PtypString**, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_BUSINESS_TELEPHONE_NUMBER, PR_BUSINESS_TELEPHONE_NUMBER_A, PR_BUSINESS_TELEPHONE_NUMBER_W, PR_OFFICE_TELEPHONE_NUMBER, urn:schemas:contacts:telephoneNumber

2.694 PidTagCallbackTelephoneNumber

Canonical name: PidTagCallbackTelephoneNumber

Description: Contains a telephone number to reach the mail user.

Property ID: 0x3A02

Data type: **PtypString**, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CALLBACK_TELEPHONE_NUMBER, PR_CALLBACK_TELEPHONE_NUMBER_A, PR_CALLBACK_TELEPHONE_NUMBER_W, urn:schemas:contacts:callbackphone

2.695 PidTagCallId

Canonical name: PidTagCallId

Property ID: 0x6806

Data type: **PtypString**, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: InternalSchemaCallID

2.696 PidTagCarTelephoneNumber

Canonical name: PidTagCarTelephoneNumber

Description: Contains the mail user's car telephone number.

Property ID: 0x3A1E

Data type: **PtypString**, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CAR_TELEPHONE_NUMBER, PR_CAR_TELEPHONE_NUMBER_A, PR_CAR_TELEPHONE_NUMBER_W, urn:schemas:contacts:othermobile

2.697 PidTagCdoRecurrenceid

Canonical name: PidTagCdoRecurrenceid

Property ID: 0x10C5

Data type: **PtypTime**, 0x0040

Area: Exchange Property set

References: [\[MS-XWDCAL\]](#)

Alternate names: PR_CDO_RECURRENCEID, urn:schemas:calendar:recurrenceid

2.698 PidTagChangeKey

Canonical name: PidTagChangeKey

Description: Contains a **global identifier (GID)** indicating the last change to the object.

Property ID: 0x65E2

Data type: PtypBinary, 0x0102

Area: History Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_CHANGE_KEY

2.699 PidTagChangeNotificationGuid

Canonical name: PidTagChangeNotificationGuid

Property ID: 0x6637

Data type: PtypGuid, 0x0048

Area: Exchange

References: [\[MS-OXCNOTIF\]](#)

Alternate names: PR_CHANGE_NOTIFICATION_GUID

2.700 PidTagChangeNumber

Canonical name: PidTagChangeNumber

Description: Contains a value that identifies the last change to the message or folder that is currently being synchronized.

Property ID: 0x67A4

Data type: PtypInteger64, 0x0014

Area: Sync

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCSTOR\]](#)

Alternate names: ptagCn

2.701 PidTagChildrensNames

Canonical name: PidTagChildrensNames

Property ID: 0x3A58

Data type: PtypMultipleString, 0x101F

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CHILDRENS_NAMES, PR_CHILDRENS_NAMES_A, PR_CHILDRENS_NAMES_W, urn:schemas:contacts:childrensnames

2.702 PidTagClientActions

Canonical name: PidTagClientActions

Property ID: 0x6645

Data type: PtypBinary, 0x0102

Area: Server-side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_CLIENT_ACTIONS, ptagClientActions

2.703 PidTagClientSubmitTime

Canonical name: PidTagClientSubmitTime

Description: Contains the current time (in UTC) when the e-mail message is submitted.

Property ID: 0x0039

Data type: PtypTime, 0x0040

Area: Message Time Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORSS\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_CLIENT_SUBMIT_TIME, urn:schemas:httpmail:date, http://schemas.microsoft.com/exchange/date-iso

2.704 PidTagCnsetRead

Canonical name: PidTagCnsetRead

Description: Contains an **IDSET** of **CNs** tracking changes to the read state for messages in the current **synchronization scope** that have been previously communicated to the client, and are reflected in its **local replica**.

Property ID: 0x67D2

Data type: PtypBinary, 0x0102

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagCnsetRead

2.705 PidTagCnsetSeen

Canonical name: PidTagCnsetSeen

Description: Contains an IDSET of CNs for folders or **normal messages** in the current synchronization scope that have been previously communicated to a client, and are reflected in its local replica.

Property ID: 0x6796

Data type: **PtypBinary**, 0x0102

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagCnsetSeen

2.706 PidTagCnsetSeenFAI

Canonical name: PidTagCnsetSeenFAI

Description: Contains IDs for folder associated information (FAI) messages and is therefore only used in contents **synchronization**.

Property ID: 0x67DA

Data type: **PtypBinary**, 0x0102

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagCnsetSeenFAI

2.707 PidTagCodePageId

Canonical name: PidTagCodePageId

Property ID: 0x66C3

Data type: **PtypInteger32**, 0x0003

Area: Exchange Profile Configuration

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_CODE_PAGE_ID, ptagCodePageId

2.708 PidTagComment

Canonical name: PidTagComment

Description: Contains a comment about the purpose or content of the Address Book object.

Property ID: 0x3004

Data type: **PtypString**, 0x001F

Area: Common Property set

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCSTOR\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_COMMENT, PR_COMMENT_A, ptagComment, PR_COMMENT_W, DAV:comment, <http://schemas.microsoft.com/exchange/summary-utf8>

2.709 PidTagCompanyMainTelephoneNumber

Canonical name: PidTagCompanyMainTelephoneNumber

Description: Contains the main telephone number of the mail user's company.

Property ID: 0x3A57

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_COMPANY_MAIN_PHONE_NUMBER, PR_COMPANY_MAIN_PHONE_NUMBER_A, PR_COMPANY_MAIN_PHONE_NUMBER_W, urn:schemas:contacts:organizationmainphone

2.710 PidTagCompanyName

Canonical name: PidTagCompanyName

Description: Contains the mail user's company name.

Property ID: 0x3A16

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#)

Alternate names: PR_COMPANY_NAME, PR_COMPANY_NAME_A, PR_COMPANY_NAME_W, urn:schemas:contacts:o

2.711 PidTagComputerNetworkName

Canonical name: PidTagComputerNetworkName

Description: Contains the name of the mail user's computer network.

Property ID: 0x3A49

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_COMPUTER_NETWORK_NAME, PR_COMPUTER_NETWORK_NAME_A, PR_COMPUTER_NETWORK_NAME_W, urn:schemas:contacts:computernetworkname

2.712 PidTagConflictEntryId**Canonical name:** PidTagConflictEntryId**Property ID:** 0x3FF0**Data type:** PtypBinary, 0x0102**Area:** ICS**References:** [\[MS-OXCSYNC\]](#)**Alternate names:** PR_CONFLICT_ENTRYID, ptagConflictEntryId**2.713 PidTagConflictItems****Canonical name:** PidTagConflictItems**Property ID:** 0x1098**Data type:** PtypMultipleBinary, 0x1102**Area:** ICS**References:** [\[MS-OXCSYNC\]](#)**Alternate names:** PR_CONFLICT_ITEMS**2.714 PidTagContainerClass****Canonical name:** PidTagContainerClass**Description:** Contains a value that describes the type of Message object that a folder contains.**Property ID:** 0x3613**Data type:** PtypString, 0x001F**Area:** Container Properties Property set**References:** [\[MS-OXCICAL\]](#), [\[MS-OXMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXSHARE\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDFOLD\]](#)**Alternate names:** PR_CONTAINER_CLASS, PR_CONTAINER_CLASS_A, ptagContainerClass, PR_CONTAINER_CLASS_W,
<http://schemas.microsoft.com/exchange/outlookfolderclass>
<http://schemas.microsoft.com/exchange/outlookfolderclass>**2.715 PidTagContainerContents****Canonical name:** PidTagContainerContents**Description:** Always empty - an NSPI server defines this value for distribution lists and is not present for all other objects.**Property ID:** 0x360F**Data type:** PtypEmbeddedTable, 0x000D

Area: Container Properties

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#)

Alternate names: PR_CONTAINER_CONTENTS, ptagContainerContents

2.716 PidTagContainerFlags

Canonical name: PidTagContainerFlags

Description: Contains a bitmask of flags that describe capabilities of an address book container.

Property ID: 0x3600

Data type: **PtypInteger32**, 0x0003

Area: Address Book

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_CONTAINER_FLAGS

2.717 PidTagContainerHierarchy

Canonical name: PidTagContainerHierarchy

Description: Identifies all subfolders of the current folder.

Property ID: 0x360E

Data type: **PtypObject**, 0x000D

Area: Container Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#)

Alternate names: PR_CONTAINER_HIERARCHY, ptagContainerHierarchy

2.718 PidTagContentCount

Canonical name: PidTagContentCount

Description: Specifies the number of rows under the header row.

Property ID: 0x3602

Data type: **PtypInteger32**, 0x0003

Area: Folder Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXCTABL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CONTENT_COUNT, ptagContentCount, DAV:visiblecount

2.719 PidTagContentFilterPhishingConfidenceLevel

Canonical name: PidTagContentFilterPhishingConfidenceLevel

Property ID: 0x4084

Data type: **PtypInteger32**, 0x0003

Area: Secure Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: ContentFilterPcl, PR_CONTENT_FILTER_PCL

2.720 PidTagContentFilterSpamConfidenceLevel

Canonical name: PidTagContentFilterSpamConfidenceLevel

Description: Indicates a confidence level that the message is spam.

Property ID: 0x4076

Data type: **PtypInteger32**, 0x0003

Area: Secure Messaging Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_CONTENT_FILTER_SCL, ptagContentFilterSCL

2.721 PidTagContentUnreadCount

Canonical name: PidTagContentUnreadCount

Description: Specifies the number of rows under the header row that have the [PidTagRead](#) property (section [2.985](#)) set to FALSE.

Property ID: 0x3603

Data type: **PtypInteger32**, 0x0003

Area: Folder Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCTABL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CONTENT_UNREAD, ptagContentUnread, urn:schemas:httpmail:unreadcount

2.722 PidTagConversationId

Canonical name: PidTagConversationId

Property ID: 0x3013

Data type: **PtypBinary**, 0x0102

Area: Conversations

References: [\[MS-OXGLOS\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_CONVERSATION_ID

2.723 PidTagConversationIndex

Canonical name: PidTagConversationIndex

Description: Indicates the relative position of this message within a conversation thread.

Property ID: 0x0071

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXOCAL\]](#),

Alternate names: PR_CONVERSATION_INDEX, ptagConversationIndex

2.724 PidTagConversationIndexTracking

Canonical name: PidTagConversationIndexTracking

Property ID: 0x3016

Data type: PtypBoolean, 0x000B

Area: Conversations

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_CONVERSATION_INDEX_TRACKING

2.725 PidTagConversationTopic

Canonical name: PidTagConversationTopic

Description: Contains an unchanging copy of the original subject.

Property ID: 0x0070

Data type: PtypString, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORSS\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_CONVERSATION_TOPIC, PR_CONVERSATION_TOPIC_A, ptagConversationTopic, PR_CONVERSATION_TOPIC_W, urn:schemas:httpmail:thread-topic

2.726 PidTagCountry

Canonical name: PidTagCountry

Description: Contains the name of the mail user's country/region.

Property ID: 0x3A26

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_COUNTRY, PR_COUNTRY_A, PR_COUNTRY_W, PR_BUSINESS_ADDRESS_COUNTRY, PR_BUSINESS_ADDRESS_COUNTRY_A, PR_BUSINESS_ADDRESS_COUNTRY_W, urn:schemas:contacts:mailingcountry

2.727 PidTagCreationTime

Canonical name: PidTagCreationTime

Description: Contains the time the object was created in UTC.

Property ID: 0x3007

Data type: **PtypTime**, 0x0040

Area: Message Time Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXODOC\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CREATION_TIME, ptagCreationTime, DAV:creationdate

2.728 PidTagCreatorEntryId

Canonical name: PidTagCreatorEntryId

Property ID: 0x3FF9

Data type: **PtypBinary**, 0x0102

Area: ID Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_CREATOR_ENTRYID, ptagCreatorEntryId

2.729 PidTagCreatorName

Canonical name: PidTagCreatorName

Description: Contains the name of a Message object.

Property ID: 0x3FF8

Data type: **PtypString**, 0x001F

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_CREATOR_NAME, PR_CREATOR_NAME_A, ptagCreatorName, PR_CREATOR_NAME_W

2.730 PidTagCreatorSimpleDisplayName

Canonical name: PidTagCreatorSimpleDisplayName

Property ID: 0x4038

Data type: PtypString, 0x001F

Area: TransportEnvelope

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagCreatorSimpleDispName

2.731 PidTagCustomerId

Canonical name: PidTagCustomerId

Description: Contains the mail user's customer identification number.

Property ID: 0x3A4A

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_CUSTOMER_ID, PR_CUSTOMER_ID_A, PR_CUSTOMER_ID_W,
urn:schemas:contacts:customerid

2.732 PidTagDamBackPatched

Canonical name: PidTagDamBackPatched

Property ID: 0x6647

Data type: PtypBoolean, 0x000B

Area: Server-side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_DAM_BACK_PATCHED, ptagDamBackPatched

2.733 PidTagDamOriginalEntryId

Canonical name: PidTagDamOriginalEntryId

Property ID: 0x6646

Data type: PtypBinary, 0x0102

Area: Server-side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_DAM_ORIGINAL_ENTRYID

2.734 PidTagDefaultPostMessageClass

Canonical name: PidTagDefaultPostMessageClass

Description: Contains the message class of the object.

Property ID: 0x36E5

Data type: **PtypString**, 0x001F

Area: MapiContainer

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_DEF_POST_MSGCLASS

2.735 PidTagDeferredActionMessageOriginalEntryId

Canonical name: PidTagDeferredActionMessageOriginalEntryId

Description: Contains the server EntryID for the DAM message.

Property ID: 0x6741

Data type: **PtypServerId**, 0x00FB

Area: Server-side Rules Properties

Defining references: [\[MS-OXORULE\]](#)

Alternate names: PR_DAM_ORIG_MSG_SVREID, ptagDamOrgMsgSvrEID

2.736 PidTagDeferredDeliveryTime

Canonical name: PidTagDeferredDeliveryTime

Description: Contains the date and time, in UTC, at which the sender prefers the message to be delivered.

Property ID: 0x000F

Data type: **PtypTime**, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_DEFERRED_DELIVERY_TIME, ptagDeferredDeliveryTime, <http://schemas.microsoft.com/exchange/deferred-delivery-iso>

2.737 PidTagDeferredSendNumber

Canonical name: PidTagDeferredSendNumber

Description: Contains a number used in the calculation of how long to defer sending a message.

Property ID: 0x3FEB

Data type: PtypInteger32, 0x0003

Area: MapiStatus

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_DEFERRED_SEND_NUMBER

2.738 PidTagDeferredSendTime

Canonical name: PidTagDeferredSendTime

Description: Contains the amount of time after which a client would like to defer sending the message.

Property ID: 0x3FEF

Data type: PtypTime, 0x0040

Area: MapiStatus

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_DEFERRED_SEND_TIME, ptagDeferredSendTime

2.739 PidTagDeferredSendUnits

Canonical name: PidTagDeferredSendUnits

Description: Specifies the unit of time used as a multiplier with the [PidTagDeferredSendNumber](#) property (section [2.737](#)) value.

Property ID: 0x3FEC

Data type: PtypInteger32, 0x0003

Area: MapiStatus

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_DEFERRED_SEND_UNITS

2.740 PidTagDelegatedByRule

Canonical name: PidTagDelegatedByRule

Property ID: 0x3FE3

Data type: PtypBoolean, 0x000B

Area: MapiStatus

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_DELEGATED_BY_RULE

2.741 PidTagDelegateFlags

Canonical name: PidTagDelegateFlags

Property ID: 0x686B

Data type: **PtypMultipleInteger32**, 0x1003

Area: MessageClassDefinedTransmittable

References: [\[MS-OXODLGT\]](#)

Alternate names: PR_DELEGATE_FLAGS, ptagDelegateFlags

2.742 PidTagDeleteAfterSubmit

Canonical name: PidTagDeleteAfterSubmit

Description: Indicates that the original message is to be deleted after the message is sent.

Property ID: 0x0E01

Data type: **PtypBoolean**, 0x000B

Area: MapiNonTransmittable

References: [\[MS-OXCICAL\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_DELETE_AFTER_SUBMIT, ptagDeleteAfterSubmit

2.743 PidTagDeletedOn

Canonical name: PidTagDeletedOn

Description: Specifies the time when the item or folder was **soft deleted**.

Property ID: 0x668F

Data type: **PtypTime**, 0x0040

Area: ExchangeFolder Property set

References: [\[MS-OXCFOLD\]](#)

Alternate names: PR_DELETED_ON, ptagDeletedOn, urn:schemas:httpmail:deletedon

2.744 PidTagDepartmentName

Canonical name: PidTagDepartmentName

Description: Contains a name for the department in which the mail user works.

Property ID: 0x3A18

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-NSPI\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_DEPARTMENT_NAME, PR_DEPARTMENT_NAME_A, PR_DEPARTMENT_NAME_W, urn:schemas:contacts:department

2.745 PidTagDepth

Canonical name: PidTagDepth

Description: Specifies the number of nested categories in which a given row is contained.

Property ID: 0x3005

Data type: PtypInteger32, 0x0003

Area: MapiCommon

References: [\[MS-NSPI\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#)

Alternate names: PR_DEPTH, ptagDepth

2.746 PidTagDisplayBcc

Canonical name: PidTagDisplayBcc

Description: Contains a list of **blind carbon copy (Bcc) recipient** display names.

Property ID: 0x0E02

Data type: PtypString, 0x001F

Area: Message Properties Property set

References: [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_DISPLAY_BCC, PR_DISPLAY_BCC_A, ptagDisplayBcc, PR_DISPLAY_BCC_W, urn:schemas:httpmail:displaybcc

2.747 PidTagDisplayCc

Canonical name: PidTagDisplayCc

Description: Contains list of carbon copy (Cc) recipient display names.

Property ID: 0x0E03

Data type: PtypString, 0x001F

Area: Message Properties Property set

References: [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_DISPLAY_CC, PR_DISPLAY_CC_A, ptagDisplayCc, PR_DISPLAY_CC_W, urn:schemas:httpmail:displaycc

2.748 PidTagDisplayName

Canonical name: PidTagDisplayName

Description: Contains the name of the attachment as input by the end user.

Property ID: 0x3001

Data type: PtypString, 0x001F

Area: MapiCommon

References: [\[MS-OXCMSG\]](#), [\[MS-NSPI\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXCADATA\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXSHARE\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDVSEC\]](#)

Alternate names: PR_DISPLAY_NAME, PR_DISPLAY_NAME_A, ptagDisplayName, PR_DISPLAY_NAME_W, urn:schemas:contacts:cn

2.749 PidTagDisplayNamePrefix

Canonical name: PidTagDisplayNamePrefix

Description: Contains the mail user's honorific title.

Property ID: 0x3A45

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_DISPLAY_NAME_PREFIX, PR_DISPLAY_NAME_PREFIX_A, PR_DISPLAY_NAME_PREFIX_W, urn:schemas:contacts:personaltitle

2.750 PidTagDisplayTo

Canonical name: PidTagDisplayTo

Description: Contains a list of the **primary recipient** display names, separated by semicolons, if an e-mail message has primary recipient.

Property ID: 0x0E04

Data type: PtypString, 0x001F

Area: Message Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_DISPLAY_TO, PR_DISPLAY_TO_A, ptagDisplayTo, PR_DISPLAY_TO_W

2.751 PidTagDisplayType

Canonical name: PidTagDisplayType

Description: Contains a value that indicates how to display an Address Book object in a table or as an addressee on a message.

Property ID: 0x3900

Data type: **PtypInteger32**, 0x0003

Area: MapiAddressBook

References: [\[MS-NSPI\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXLDAP\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_DISPLAY_TYPE, ptagDisplayType

2.752 PidTagDisplayTypeEx

Canonical name: PidTagDisplayTypeEx

Description: Contains a value that indicates how to display an Address Book object in a table or as a recipient on a message.

Property ID: 0x3905

Data type: **PtypInteger32**, 0x0003

Area: MapiAddressBook

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_DISPLAY_TYPE_EX

2.753 PidTagEcWarning

Canonical name: PidTagEcWarning

Description: Contains a value that conveys a warning that occurred when producing output for an element in context.

Property ID: 0x400F

Data type: **PtypInteger32**, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEcWarning

2.754 PidTagEmailAddress

Canonical name: PidTagEmailAddress

Description: Contains the Address Book object's e-mail address.

Property ID: 0x3003

Data type: **PtypString**, 0x001F

Area: MapiCommon

References: [\[MS-NSPI\]](#), [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXPSVAL\]](#)

Alternate names: PR_EMAIL_ADDRESS, PR_EMAIL_ADDRESS_A, PR_EMAIL_ADDRESS_W

2.755 PidTagEndAttach

Canonical name: PidTagEndAttach

Property ID: 0x400E

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEndAttach

2.756 PidTagEndDate

Canonical name: PidTagEndDate

Description: Contains the value of the [PidLidAppointmentEndWhole](#) property (section [2.14](#)).

Property ID: 0x0061

Data type: PtypTime, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#)

Alternate names: PR_END_DATE, http://schemas.microsoft.com/mapi/end_date

2.757 PidTagEndEmbed

Canonical name: PidTagEndEmbed

Property ID: 0x4002

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEndEmbed

2.758 PidTagEndFolder

Canonical name: PidTagEndFolder

Property ID: 0x400B

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEndFolder

2.759 PidTagEndMessage

Canonical name: PidTagEndMessage

Property ID: 0x400D

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEndMessage

2.760 PidTagEndToRecip

Canonical name: PidTagEndToRecip

Property ID: 0x4004

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagEndToRecip

2.761 PidTagEntryId

Canonical name: PidTagEntryId

Description: Contains the information to identify many different types of **messaging objects**, including objects that are not in an address book.

Property ID: 0x0FFF

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPERM\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXPFOAB\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXWAVLS\]](#), [\[MS-OXOCFG\]](#)

Alternate names: PR_ENTRYID, ptagEntryId

2.762 PidTagExceptionEndTime

Canonical name: PidTagExceptionEndTime

Description: Contains the start date and time of the exception in the local time zone of the computer when the exception is created.

Property ID: 0x7FFC

Data type: PtypTime, 0x0040

Area: MessageClassDefinedNonTransmittable

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_EXCEPTION_ENDTIME, ptagExceptionEndTime

2.763 PidTagExceptionReplaceTime

Canonical name: PidTagExceptionReplaceTime

Property ID: 0x7FF9

Data type: PtypTime, 0x0040

Area: MessageClassDefinedNonTransmittable

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_EXCEPTION_REPLACETIME

2.764 PidTagExceptionStartTime

Canonical name: PidTagExceptionStartTime

Description: Contains the end date and time of the exception in the local time zone of the computer when the exception is created.

Property ID: 0x7FFB

Data type: PtypTime, 0x0040

Area: MessageClassDefinedNonTransmittable

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_EXCEPTION_STARTTIME, ptagExceptionStartTime

2.765 PidTagExchangeNTSecurityDescriptor

Canonical name: PidTagExchangeNTSecurityDescriptor

Property ID: 0x0E84

Data type: PtypBinary, 0x0102

Area: Calendar Document Property set

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/ntsecuritydescriptor>,
<http://schemas.microsoft.com/exchange/ntsecuritydescriptor>

2.766 PidTagExpiryNumber

Canonical name: PidTagExpiryNumber

Description: Used along with [PidTagExpiryUnits](#) (section [2.768](#)) to define the expiry send time.

Property ID: 0x3FED

Data type: **PtypInteger32**, 0x0003

Area: MapiStatus

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_EXPIRY_NUMBER

2.767 PidTagExpiryTime

Canonical name: PidTagExpiryTime

Description: Contains the time after which a client wants to receive an expiry event if the message arrives late.

Property ID: 0x0015

Data type: **PtypTime**, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_EXPIRY_TIME, ptagExpiryTime, urn:schemas:httpmail:expiry-date,
<http://schemas.microsoft.com/exchange/expiry-date-iso>

2.768 PidTagExpiryUnits

Canonical name: PidTagExpiryUnits

Description: Used to describe the unit of time that [PidTagExpiryNumber](#) (section [2.766](#)) multiplies.

Property ID: 0x3FEE

Data type: **PtypInteger32**, 0x0003

Area: MapiStatus

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_EXPIRY_UNITS

2.769 PidTagExtendedFolderFlags

Canonical name: PidTagExtendedFolderFlags

Description: Contains encoded sub-properties for a folder.

Property ID: 0x36DA

Data type: PtypBinary, 0x0102

Area: MapiContainer

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_EXTENDED_FOLDER_FLAGS, ptagExtendedFolderFlags

2.770 PidTagExtendedRuleMessageActions

Canonical name: PidTagExtendedRuleMessageActions

Property ID: 0x0E99

Data type: PtypBinary, 0x0102

Area: Rules

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_EXTENDED_RULE_MSG_ACTIONS

2.771 PidTagExtendedRuleMessageCondition

Canonical name: PidTagExtendedRuleMessageCondition

Property ID: 0x0E9A

Data type: PtypBinary, 0x0102

Area: Rules

References: [\[MS-OXCPRPT\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_EXTENDED_RULE_MSG_CONDITION

2.772 PidTagExtendedRuleSizeLimit

Canonical name: PidTagExtendedRuleSizeLimit

Property ID: 0x0E9B

Data type: PtypInteger32, 0x0003

Area: Rules

References: [\[MS-OXCSTOR\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_EXTENDED_RULE_SIZE_LIMIT

2.773 PidTagFaxNumberOfPages

Canonical name: PidTagFaxNumberOfPages

Property ID: 0x6804

Data type: **PtypInteger32**, 0x0003

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: InternalSchemaFaxNumberOfPages

2.774 PidTagFlagCompleteTime

Canonical name: PidTagFlagCompleteTime

Description: Specifies the date and time in UTC that the Message object was flagged completed.

Property ID: 0x1091

Data type: **PtypTime**, 0x0040

Area: Miscellaneous Properties Property set

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_FLAG_COMPLETE_TIME, ptagFlagCompleteTime, urn:schemas:httpmail:flagcompleted

2.775 PidTagFlagStatus

Canonical name: PidTagFlagStatus

Description: Specifies the flag state of the Message object.

Property ID: 0x1090

Data type: **PtypInteger32**, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_FLAG_STATUS, ptagFlagStatus

2.776 PidTagFlatUrlName

Canonical name: PidTagFlatUrlName

Property ID: 0x670E

Data type: **PtypString**, 0x001F

Area: ExchangeAdministrative Property set

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_FLAT_URL_NAME, PR_FLAT_URL_NAME_A, PR_FLAT_URL_NAME_W, ptagFlatURLName, http://schemas.microsoft.com/exchange/permanenturl

2.777 PidTagFolderAssociatedContents

Canonical name: PidTagFolderAssociatedContents

Description: Identifies all FAI messages in the current folder.

Property ID: 0x3610

Data type: **PtypObject**, 0x000D

Area: MapiContainer

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#)

Alternate names: PR_FOLDER_ASSOCIATED_CONTENTS

2.778 PidTagFolderId

Canonical name: PidTagFolderId

Description: Contains the **FID** of the folder.

Property ID: 0x6748

Data type: **PtypInteger64**, 0x0014

Area: ID Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCROPS\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXRTFEX\]](#)

Alternate names: ptagFID

2.779 PidTagFolderType

Canonical name: PidTagFolderType

Description: Specifies the type of a folder that includes **Root folder**, Generic folder, and **Search folder**.

Property ID: 0x3601

Data type: **PtypInteger32**, 0x0003

Area: MapiContainer

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_FOLDER_TYPE, ptagFolderType

2.780 PidTagFollowupIcon

Canonical name: PidTagFollowupIcon

Description: Specifies the flag color of the Message object.

Property ID: 0x1095

Data type: PtypInteger32, 0x0003

Area: RenMessageFolder

References: [\[MS-OXCFXICS\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_FOLLOWUP_ICON, ptagFollowupIcon

2.781 PidTagFreeBusyCountMonths

Canonical name: PidTagFreeBusyCountMonths

Description: Contains a value used to calculate the start and end dates of the range of free/busy data to be published to the public folders.

Property ID: 0x6869

Data type: PtypInteger32, 0x0003

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOCAL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_FREEBUSY_COUNT_MONTHS

2.782 PidTagFreeBusyEntryIds

Canonical name: PidTagFreeBusyEntryIds

Property ID: 0x36E4

Data type: PtypMultipleBinary, 0x1102

Area: MapiContainer

References: [\[MS-OXODLGT\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_FREEBUSY_ENTRYIDS, ptagFreeBusyEntryIds

2.783 PidTagFreeBusyMessageEmailAddress

Canonical name: PidTagFreeBusyMessageEmailAddress

Property ID: 0x6849

Data type: PtypString, 0x001F

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_FREEBUSY_EMA

2.784 PidTagFreeBusyPublishEnd

Canonical name: PidTagFreeBusyPublishEnd

Property ID: 0x6848

Data type: PtypInteger32, 0x0003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_FREEBUSY_PUBLISH_END

2.785 PidTagFreeBusyPublishStart

Canonical name: PidTagFreeBusyPublishStart

Property ID: 0x6847

Data type: PtypInteger32, 0x0003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_FREEBUSY_PUBLISH_START

2.786 PidTagFreeBusyRangeTimestamp

Canonical name: PidTagFreeBusyRangeTimestamp

Property ID: 0x6868

Data type: PtypTime, 0x0040

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_FREEBUSY_RANGE_TIMESTAMP

2.787 PidTagFtpSite

Canonical name: PidTagFtpSite

Description: Contains the mail user's File Transfer Protocol (FTP) site address.

Property ID: 0x3A4C

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_FTP_SITE, PR_FTP_SITE_A, PR_FTP_SITE_W, urn:schemas:contacts:ftpsite

2.788 PidTagFXDelProp

Canonical name: PidTagFXDelProp

Description: Contains a value that represents a directive to a client to delete specific **subobjects** of the object in context.

Property ID: 0x4016

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagFXDelProp

2.789 PidTagFXErrorInfo

Canonical name: PidTagFXErrorInfo

Property ID: 0x4018

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagFXErrorInfo

2.790 PidTagGatewayNeedsToRefresh

Canonical name: PidTagGatewayNeedsToRefresh

Property ID: 0x6846

Data type: PtypBoolean, 0x000B

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_GATEWAY_NEEDS_TO_REFRESH

2.791 PidTagGender

Canonical name: PidTagGender

Description: Contains a value that represents the mail user's gender.

Property ID: 0x3A4D

Data type: PtypInteger16, 0x0002

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_GENDER, urn:schemas:contacts:gender

2.792 PidTagGeneration

Canonical name: PidTagGeneration

Description: Contains a generational abbreviation that follows the full name of the mail user.

Property ID: 0x3A05

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_GENERATION, PR_GENERATION_A, PR_GENERATION_W, urn:schemas:contacts:namesuffix

2.793 PidTagGivenName

Canonical name: PidTagGivenName

Description: Contains the mail user's given name.

Property ID: 0x3A06

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_GIVEN_NAME, PR_GIVEN_NAME_A, PR_GIVEN_NAME_W, urn:schemas:contacts:givenName

2.794 PidTagGovernmentIdNumber

Canonical name: PidTagGovernmentIdNumber

Description: Contains a government identifier for the mail user.

Property ID: 0x3A07

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_GOVERNMENT_ID_NUMBER, PR_GOVERNMENT_ID_NUMBER_A, PR_GOVERNMENT_ID_NUMBER_W, urn:schemas:contacts:governmentid

2.795 PidTagHasAttachments

Canonical name: PidTagHasAttachments

Description: Indicates whether the Message object contains at least one attachment.

Property ID: 0x0E1B

Data type: **PtypBoolean**, 0x000B

Area: Message Attachment Properties Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HASATTACH, ptagHasAttach, urn:schemas:httpmail:hasattachment

2.796 PidTagHasDeferredActionMessages

Canonical name: PidTagHasDeferredActionMessages

Property ID: 0x3FEA

Data type: PtypBoolean, 0x000B

Area: Rules

References: [\[MS-OXORULE\]](#)

Alternate names: PR_HAS_DAMS, ptagHasDAMs

2.797 PidTagHasNamedProperties

Canonical name: PidTagHasNamedProperties

Property ID: 0x664A

Data type: PtypBoolean, 0x000B

Area: ExchangeMessageReadOnly

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_HAS_NAMED_PROPERTIES, ptagHasNamedProperties

2.798 PidTagHasRules

Canonical name: PidTagHasRules

Property ID: 0x663A

Data type: PtypBoolean, 0x000B

Area: ExchangeFolder

References: [\[MS-OXORULE\]](#)

Alternate names: PR_HAS_RULES, ptagHasRules

2.799 PidTagHierarchyChangeNumber

Canonical name: PidTagHierarchyChangeNumber

Description: Contains a number that monotonically increases every time a subfolder is added to or deleted from this folder.

Property ID: 0x663E

Data type: PtypInteger32, 0x0003

Area: ExchangeFolder

References: [\[MS-OXCFOLD\]](#)

Alternate names: PR_HIERARCHY_CHANGE_NUM

2.800 PidTagHobbies

Canonical name: PidTagHobbies

Description: Contains the names of the mail user's hobbies.

Property ID: 0x3A43

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOBBIES, PR_HOBBIES_A, PR_HOBBIES_W, urn:schemas:contacts:hobbies

2.801 PidTagHome2TelephoneNumber

Canonical name: PidTagHome2TelephoneNumber

Description: Contains a secondary telephone number at the mail user's home.

Property ID: 0x3A2F

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME2_TELEPHONE_NUMBER, PR_HOME2_TELEPHONE_NUMBER_A, PR_HOME2_TELEPHONE_NUMBER_W, urn:schemas:contacts:homephone2

2.802 PidTagHome2TelephoneNumbers

Canonical name: PidTagHome2TelephoneNumbers

Description: Contains secondary telephone numbers at the mail user's home.

Property ID: 0x3A2F

Data type: PtypMultipleString, 0x101F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_HOME2_TELEPHONE_NUMBER_A_MV

2.803 PidTagHomeAddressCity

Canonical name: PidTagHomeAddressCity

Description: Contains the name of the mail user's home locality, such as the town or city.

Property ID: 0x3A59

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_CITY, PR_HOME_ADDRESS_CITY_A, PR_HOME_ADDRESS_CITY_W, urn:schemas:contacts:homeCity

2.804 PidTagHomeAddressCountry

Canonical name: PidTagHomeAddressCountry

Description: Contains the name of the mail user's home country/region.

Property ID: 0x3A5A

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_COUNTRY, PR_HOME_ADDRESS_COUNTRY_A, PR_HOME_ADDRESS_COUNTRY_W, urn:schemas:contacts:homeCountry

2.805 PidTagHomeAddressPostalCode

Canonical name: PidTagHomeAddressPostalCode

Description: Contains the postal code for the mail user's home postal address.

Property ID: 0x3A5B

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_POSTAL_CODE, PR_HOME_ADDRESS_POSTAL_CODE_A, PR_HOME_ADDRESS_POSTAL_CODE_W, urn:schemas:contacts:homePostalCode

2.806 PidTagHomeAddressPostOfficeBox

Canonical name: PidTagHomeAddressPostOfficeBox

Description: Contains the number or identifier of the mail user's home post office box.

Property ID: 0x3A5E

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_POST_OFFICE_BOX,
PR_HOME_ADDRESS_POST_OFFICE_BOX_A, PR_HOME_ADDRESS_POST_OFFICE_BOX_W,
urn:schemas:contacts:homepostofficebox

2.807 PidTagHomeAddressStateOrProvince

Canonical name: PidTagHomeAddressStateOrProvince

Description: Contains the name of the mail user's home state or province.

Property ID: 0x3A5C

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_STATE_OR_PROVINCE,
PR_HOME_ADDRESS_STATE_OR_PROVINCE_A, PR_HOME_ADDRESS_STATE_OR_PROVINCE_W,
urn:schemas:contacts:homeState

2.808 PidTagHomeAddressStreet

Canonical name: PidTagHomeAddressStreet

Description: Contains the mail user's home street address.

Property ID: 0x3A5D

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_ADDRESS_STREET, PR_HOME_ADDRESS_STREET_A,
PR_HOME_ADDRESS_STREET_W, urn:schemas:contacts:homeStreet

2.809 PidTagHomeFaxNumber

Canonical name: PidTagHomeFaxNumber

Description: Contains the telephone number of the mail user's home fax machine.

Property ID: 0x3A25

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_FAX_NUMBER, PR_HOME_FAX_NUMBER_A, PR_HOME_FAX_NUMBER_W, urn:schemas:contacts:homefax

2.810 PidTagHomeTelephoneNumber

Canonical name: PidTagHomeTelephoneNumber

Description: Contains the primary telephone number of the mail user's home.

Property ID: 0x3A09

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_HOME_TELEPHONE_NUMBER, PR_HOME_TELEPHONE_NUMBER_A, PR_HOME_TELEPHONE_NUMBER_W, urn:schemas:contacts:homePhone

2.811 PidTagHtml

Canonical name: PidTagHtml

Description: Contains message body text in HTML format.

Property ID: 0x1013

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXBBODY\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMMS\]](#)

Alternate names: PR_HTML, ptagHtml

2.812 PidTagICalendarEndTime

Canonical name: PidTagICalendarEndTime

Property ID: 0x10C4

Data type: PtypTime, 0x0040

Area: Calendar Property set

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:dtend

2.813 PidTagICalendarReminderNextTime

Canonical name: PidTagICalendarReminderNextTime

Property ID: 0x10CA

Data type: PtypTime, 0x0040

Area: Calendar Property set

References: [\[MS-XWDCAL\]](#)

Alternate names: urn:schemas:calendar:remindernexttime

2.814 PidTagICalendarStartTime

Canonical name: PidTagICalendarStartTime

Property ID: 0x10C3

Data type: PtypTime, 0x0040

Area: Calendar Property set

References: [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: urn:schemas:calendar:dtstart

2.815 PidTagIconIndex

Canonical name: PidTagIconIndex

Description: Specifies which icon is to be used by a user interface when displaying a group of Note objects.

Property ID: 0x1080

Data type: PtypInteger32, 0x0003

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXOJRNL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ICON_INDEX, ptagIconIndex

2.816 PidTagIdsetDeleted

Canonical name: PidTagIdsetDeleted

Description: Contains a serialization of **REPLID**-based IDSETs.

Property ID: 0x67E5

Data type: PtypBinary, 0x0102

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIdsetDeleted

2.817 PidTagIdsetExpired

Canonical name: PidTagIdsetExpired

Description: Contains a serialization of a REPLID-based IDSETs that contains IDs that expired since the last synchronization identified by the initial **ICS state**.

Property ID: 0x6793

Data type: PtypBinary, 0x0102

Area: Sync

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagMidsetExpired

2.818 PidTagIdsetGiven

Canonical name: PidTagIdsetGiven

Description: Contains a value that contains a serialized IDSET of folder IDs (FIDs) for hierarchy synchronization, or message IDs (MIDs) for contents synchronization, that exist in the local replica of the client.

Property ID: 0x4017

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIdsetGiven

2.819 PidTagIdsetRead

Canonical name: PidTagIdsetRead

Description: Contains a serialization of a REPLID-based IDSETs that contain IDs of messages that were marked as read since the last synchronization identified by the initial ICS state.

Property ID: 0x402D

Data type: PtypBinary, 0x0102

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIdsetRead

2.820 PidTagIdsetNoLongerInScope

Canonical name: PidTagIdsetNoLongerInScope

Description: Contains a serialization of a REPLID-based IDSET that contains the IDs of messages that got out of synchronization scope since the last synchronization identified by the initial ICS state.

Property ID: 0x4021

Data type: PtypBinary, 0x0102

Area: Sync

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagSoftDeletes

2.821 PidTagIdsetUnread

Canonical name: PidTagIdsetUnread

Description: Contains a serialization of a REPLID-based IDSET that contains IDs of messages that were marked as unread since the last synchronization identified by the initial ICS state.

Property ID: 0x402E

Data type: PtypBinary, 0x0102

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIdsetUnread

2.822 PidTagImapCachedMsgsize

Canonical name: PidTagImapCachedMsgsize

Property ID: 0x10F0

Data type: PtypBinary, 0x0102

Area: RenMessageFolder

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagImapCachedMsgsize

2.823 PidTagImportance

Canonical name: PidTagImportance

Description: Indicates the level of importance assigned by the end user to the Message object.

Property ID: 0x0017

Data type: PtypInteger32, 0x0003

Area: General Message Properties Property set

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_IMPORTANCE, ptagImportance, urn:schemas:httpmail:importance, http://schemas.microsoft.com/exchange/importance-long, http://schemas.microsoft.com/exchange/x-priority-long

2.824 PidTagInConflict

Canonical name: PidTagInConflict

Property ID: 0x666C

Data type: PtypBoolean, 0x000B

Area: Conflict Note

References: [\[MS-OXCSYNC\]](#)

Alternate names: PR_IN_CONFLICT, ptagInConflict

2.825 PidTagIncrementalSyncMessagePartial

Canonical name: PidTagIncrementalSyncMessagePartial

Description: Contains a value that specifies an index of a property group within a property group mapping currently in context.

Property ID: 0x407A

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncMsgPartial

2.826 PidTagIncrSyncChg

Canonical name: PidTagIncrSyncChg

Property ID: 0x4012

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncChg

2.827 PidTagIncrSyncChgPartial

Canonical name: PidTagIncrSyncChgPartial

Property ID: 0x407D

Data type: PtypInteger32, 0x0003

Area: IC

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncChgPartial

2.828 PidTagIncrSyncDel

Canonical name: PidTagIncrSyncDel

Property ID: 0x4013

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncDel

2.829 PidTagIncrSyncEnd

Canonical name: PidTagIncrSyncEnd

Property ID: 0x4014

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncEnd

2.830 PidTagIncrSyncGroupId

Canonical name: PidTagIncrSyncGroupId

Property ID: 0x407C

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncGroupId

2.831 PidTagIncrSyncGroupInfo

Canonical name: PidTagIncrSyncGroupInfo

Property ID: 0x407B

Data type: PtypBinary, 0x0102

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncGroupInfo

2.832 PidTagIncrSyncMessage

Canonical name: PidTagIncrSyncMessage

Property ID: 0x4015

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncMsg

2.833 PidTagIncrSyncProgressMode

Canonical name: PidTagIncrSyncProgressMode

Property ID: 0x4074

Data type: PtypBoolean, 0x000B

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncProgressMode

2.834 PidTagIncrSyncProgressPerMsg

Canonical name: PidTagIncrSyncProgressPerMsg

Property ID: 0x4075

Data type: PtypBoolean, 0x000B

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncProgressPerMsg

2.835 PidTagIncrSyncRead

Canonical name: PidTagIncrSyncRead

Property ID: 0x402F

Data type: PtypInteger32, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncRead

2.836 PidTagIncrSyncStateBegin

Canonical name: PidTagIncrSyncStateBegin

Property ID: 0x403A

Data type: **PtypInteger32**, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncStateBegin

2.837 PidTagIncrSyncStateEnd

Canonical name: PidTagIncrSyncStateEnd

Property ID: 0x403B

Data type: **PtypInteger32**, 0x0003

Area: ICS

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagIncrSyncStateEnd

2.838 PidTagInitialDetailsPane

Canonical name: PidTagInitialDetailsPane

Description: Contains which page of a display template to display first.

Property ID: 0x3F08

Data type: **PtypInteger32**, 0x0003

Area: MAPI Display Tables

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_INITIAL_DETAILS_PANE

2.839 PidTagInitials

Canonical name: PidTagInitials

Description: Contains the initials for parts of the full name of the mail user.

Property ID: 0x3A0A

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_INITIALS, PR_INITIALS_A, PR_INITIALS_W, urn:schemas:contacts:initials

2.840 PidTagInReplyToId

Canonical name: PidTagInReplyToId

Description: Contains the original message's [PidTagInternetMessageId](#) (section [2.847](#)) value.

Property ID: 0x1042

Data type: **PtypString**, 0x001F

Area: General Message Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_IN_REPLY_TO_ID, PR_IN_REPLY_TO_ID_A, PR_IN_REPLY_TO_ID_W

2.841 PidTagInstanceKey

Canonical name: PidTagInstanceKey

Description: Contains an object on an NSPI server.

Property ID: 0x0FF6

Data type: **PtypBinary**, 0x0102

Area: Table Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOABKT\]](#)

Alternate names: PR_INSTANCE_KEY, ptagInstanceKey

2.842 PidTagInstanceNum

Canonical name: PidTagInstanceNum

Description: Contains an identifier for a **single instance** of a row in the table.

Property ID: 0x674E

Data type: **PtypInteger32**, 0x0003

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCTABL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: ptagInstanceNum

2.843 PidTagInstID

Canonical name: PidTagInstID

Description: Contains an identifier for all instances of a row in the table.

Property ID: 0x674D

Data type: PtypInteger64, 0x0014

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCTABL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: ptagInstID

2.844 PidTagInternetArticleNumber

Canonical name: PidTagInternetArticleNumber

Property ID: 0x0E23

Data type: PtypInteger32, 0x0003

Area: MIME Properties

References: [\[MS-OXCFXICS\]](#)

Alternate names: PR_INTERNET_ARTICLE_NUMBER

2.845 PidTagInternetCodepage

Canonical name: PidTagInternetCodepage

Property ID: 0x3FDE

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_INTERNET_CPID, ptagInternetCpid

2.846 PidTagInternetMailOverrideFormat

Canonical name: PidTagInternetMailOverrideFormat

Description: Indicates the encoding method and HTML inclusion for attachments.

Property ID: 0x5902

Data type: PtypInteger32, 0x0003

Area: MIME Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_INETMAIL_OVERRIDE_FORMAT, ptagInetMailOverrideFormat

2.847 PidTagInternetMessageId

Canonical name: PidTagInternetMessageId

Description: Corresponds to the **message-id** field.

Property ID: 0x1035

Data type: **PtypString**, 0x001F

Area: MIME Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_INTERNET_MESSAGE_ID, PR_INTERNET_MESSAGE_ID_A, PR_INTERNET_MESSAGE_ID_W

2.848 PidTagInternetReferences

Canonical name: PidTagInternetReferences

Property ID: 0x1039

Data type: **PtypString**, 0x001F

Area: MIME Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_INTERNET_REFERENCES, PR_INTERNET_REFERENCES_A, PR_INTERNET_REFERENCES_W

2.849 PidTagIpmAppointmentEntryId

Canonical name: PidTagIpmAppointmentEntryId

Property ID: 0x36D0

Data type: **PtypBinary**, 0x0102

Area: Folder Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_APPOINTMENT_ENTRYID

2.850 PidTagIpmContactEntryId

Canonical name: PidTagIpmContactEntryId

Property ID: 0x36D1

Data type: **PtypBinary**, 0x0102

Area: Folder Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_CONTACT_ENTRYID

2.851 PidTagIpmDraftsEntryId

Canonical name: PidTagIpmDraftsEntryId

Property ID: 0x36D7

Data type: PtypBinary, 0x0102

Area: Folder Properties

References: [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_DRAFTS_ENTRYID

2.852 PidTagIpmJournalEntryId

Canonical name: PidTagIpmJournalEntryId

Property ID: 0x36D2

Data type: PtypBinary, 0x0102

Area: Folder Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_JOURNAL_ENTRYID

2.853 PidTagIpmNoteEntryId

Canonical name: PidTagIpmNoteEntryId

Property ID: 0x36D3

Data type: PtypBinary, 0x0102

Area: Folder Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_NOTE_ENTRYID

2.854 PidTagIpmTaskEntryId

Canonical name: PidTagIpmTaskEntryId

Property ID: 0x36D4

Data type: PtypBinary, 0x0102

Area: Folder Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_IPM_TASK_ENTRYID

2.855 PidTagIsdnNumber

Canonical name: PidTagIsdnNumber

Description: Contains the mail user's ISDN-capable telephone number.

Property ID: 0x3A2D

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ISDN_NUMBER, PR_ISDN_NUMBER_A, PR_ISDN_NUMBER_W,
urn:schemas:contacts:internationalisdnnumber

2.856 PidTagItemTemporaryflags

Canonical name: PidTagItemTemporaryflags

Property ID: 0x1097

Data type: **PtypInteger32**, 0x0003

Area: General Message Properties

References: [\[MS-OXCFOLD\]](#)

Alternate names: PR_ITEM_TMPFLAGS

2.857 PidTagJunkAddRecipientsToSafeSendersList

Canonical name: PidTagJunkAddRecipientsToSafeSendersList

Description: Indicates whether e-mail recipients are to be added to the safe senders list or not.

Property ID: 0x6103

Data type: **PtypInteger32**, 0x0003

Area: Spam

References: [\[MS-OXCSPAM\]](#)

Alternate names: PR_JUNK_ADD_RECIPS_TO_SSL

2.858 PidTagJunkIncludeContacts

Canonical name: PidTagJunkIncludeContacts

Description: Indicates whether e-mail addresses of the contacts in the Contacts folder are treated in a special way with respect to the spam filter.

Property ID: 0x6100

Data type: **PtypInteger32**, 0x0003

Area: Spam

References: [\[MS-OXCSPAM\]](#)

Alternate names: PR_JUNK_INCLUDE_CONTACTS

2.859 PidTagJunkPermanentlyDelete

Canonical name: PidTagJunkPermanentlyDelete

Description: Indicates whether messages identified as spam can be permanently deleted.

Property ID: 0x6102

Data type: **PtypInteger32**, 0x0003

Area: Spam

References: [\[MS-OXCSPAM\]](#)

Alternate names: PR_JUNK_PERMANENTLY_DELETE

2.860 PidTagJunkPhishingEnableLinks

Canonical name: PidTagJunkPhishingEnableLinks

Description: Indicated whether the phishing stamp on a message is to be ignored.

Property ID: 0x6107

Data type: **PtypBoolean**, 0x000B

Area: Spam

References: [\[MS-OXCSPAM\]](#), [\[MS-OXPHISH\]](#)

Alternate names: PR_JUNK_PHISHING_ENABLE_LINKS

2.861 PidTagJunkThreshold

Canonical name: PidTagJunkThreshold

Description: Indicates how aggressively incoming e-mail is to be sent to the Junk E-mail folder.

Property ID: 0x6101

Data type: **PtypInteger32**, 0x0003

Area: Spam

References: [\[MS-OXCSPAM\]](#)

Alternate names: PR_JUNK_THRESHOLD

2.862 PidTagKeyword

Canonical name: PidTagKeyword

Description: Contains a keyword that identifies the mail user to the mail user's system administrator.

Property ID: 0x3A0B

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_KEYWORD, PR_KEYWORD_A, PR_KEYWORD_W

2.863 PidTagLanguage

Canonical name: PidTagLanguage

Description: Contains a value that indicates the language in which the messaging user is writing messages.

Property ID: 0x3A0C

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_LANGUAGE, PR_LANGUAGE_A, PR_LANGUAGE_W, urn:schemas:contacts:language

2.864 PidTagLastModificationTime

Canonical name: PidTagLastModificationTime

Description: Contains the time of the last modification to the object in UTC.

Property ID: 0x3008

Data type: **PtypTime**, 0x0040

Area: Message Time Properties Property set

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCROPS\]](#), [\[MS-OXCSYNC\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_LAST_MODIFICATION_TIME, ptagLastModificationTime, urn:schemas:calendar:lastmodifiedtime, DAV:getlastmodified

2.865 PidTagLastModifierEntryId

Canonical name: PidTagLastModifierEntryId

Property ID: 0x3FFB

Data type: **PtypBinary**, 0x0102

Area: History Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_LAST_MODIFIER_ENTRYID, ptagLastModifierEntryId

2.866 PidTagLastModifierName

Canonical name: PidTagLastModifierName

Description: Contains the name of the last mail user to modify the object.

Property ID: 0x3FFA

Data type: **PtypString**, 0x001F

Area: History Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_LAST_MODIFIER_NAME, PR_LAST_MODIFIER_NAME_A, ptagLastModifierName, PR_LAST_MODIFIER_NAME_W

2.867 PidTagLastModifierSimpleDisplayName

Canonical name: PidTagLastModifierSimpleDisplayName

Property ID: 0x4039

Data type: **PtypString**, 0x001F

Area: TransportEnvelope

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagLastModifierSimpleDispName

2.868 PidTagLastVerbExecuted

Canonical name: PidTagLastVerbExecuted

Description: Specifies the last verb executed for the message item to which it is related.

Property ID: 0x1081

Data type: **PtypInteger32**, 0x0003

Area: History Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_LAST_VERB_EXECUTED, ptagLastVerbExecuted

2.869 PidTagLastVerbExecutionTime

Canonical name: PidTagLastVerbExecutionTime

Description: Contains the date and time, in UTC, during which the operation represented in [PidTagLastVerbExecuted](#) (section [2.868](#)) took place.

Property ID: 0x1082

Data type: **PtypTime**, 0x0040

Area: History Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_LAST_VERB_EXECUTION_TIME, ptagLastVerbExecutionTime

2.870 PidTagListHelp

Canonical name: PidTagListHelp

Property ID: 0x1043

Data type: **PtypString**, 0x001F

Area: Miscellaneous Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_LIST_HELP, PR_LIST_HELP_A, PR_LIST_HELP_W

2.871 PidTagListSubscribe

Canonical name: PidTagListSubscribe

Property ID: 0x1044

Data type: **PtypString**, 0x001F

Area: Miscellaneous Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_LIST_SUBSCRIBE, PR_LIST_SUBSCRIBE_A, PR_LIST_SUBSCRIBE_W

2.872 PidTagListUnsubscribe

Canonical name: PidTagListUnsubscribe

Property ID: 0x1045

Data type: **PtypString**, 0x001F

Area: Miscellaneous Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_LIST_UNSUBSCRIBE, PR_LIST_UNSUBSCRIBE_A, PR_LIST_UNSUBSCRIBE_W

2.873 PidTagLocalCommitTime

Canonical name: PidTagLocalCommitTime

Description: Contains the time a [RopCreateMessage](#) ([\[MS-OXCROPS\]](#) section 2.2.6.2) was processed.

Property ID: 0x6709

Data type: PtypTime, 0x0040

Area: Server

References: [\[MS-OXCMSG\]](#)

Alternate names: PR_LOCAL_COMMIT_TIME, ptagLocalCommitTime

2.874 PidTagLocaleId

Canonical name: PidTagLocaleId

Description: Contains the **Logon object** LocaleID.

Property ID: 0x66A1

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXCSTOR\]](#)

Alternate names: PR_LOCALE_ID, ptagLocaleId

2.875 PidTagLocality

Canonical name: PidTagLocality

Description: Contains the name of the mail user's locality, such as the town or city.

Property ID: 0x3A27

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-EXOAB\]](#), [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_LOCALITY, PR_LOCALITY_A, PR_LOCALITY_W, PR_BUSINESS_ADDRESS_LOCALITY, PR_BUSINESS_ADDRESS_LOCALITY_A, PR_BUSINESS_ADDRESS_LOCALITY_W, urn:schemas:contacts:mailingcity

2.876 PidTagLocation

Canonical name: PidTagLocation

Description: Contains the location of the mail user in a format that is useful to the mail user's organization.

Property ID: 0x3A0D

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-EXOABK\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_LOCATION, PR_LOCATION_A, PR_LOCATION_W,
urn:schemas:contacts:location

2.877 PidTagMailboxOwnerEntryId

Canonical name: PidTagMailboxOwnerEntryId

Description: The EntryID in the **Global Address List GAL** of the owner of the mailbox.

Property ID: 0x661B

Data type: **PtypBinary**, 0x0102

Area: Message Store Properties

References: [\[MS-OXCSTOR\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_MAILBOX_OWNER_ENTRYID, ptagMailboxOwnerEntryId

2.878 PidTagMailboxOwnerName

Canonical name: PidTagMailboxOwnerName

Description: Display name of the owner of the mailbox.

Property ID: 0x661C

Data type: **PtypString**, 0x001F

Area: Message Store Properties

References: [\[MS-OXCSTOR\]](#), [\[MS-OXOCAL\]](#)

Alternate names: PR_MAILBOX_OWNER_NAME, PR_MAILBOX_OWNER_NAME_A,
ptagMailboxOwnerName, PR_MAILBOX_OWNER_NAME_W

2.879 PidTagManagerName

Canonical name: PidTagManagerName

Description: Contains the name of the mail user's manager.

Property ID: 0x3A4E

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_MANAGER_NAME, PR_MANAGER_NAME_A, PR_MANAGER_NAME_W,
urn:schemas:contacts:manager

2.880 PidTagMappingSignature

Canonical name: PidTagMappingSignature

Description: A 16-byte constant that is present on all Address Book objects, but is not present on objects in an offline address book.

Property ID: 0x0FF8

Data type: PtypBinary, 0x0102

Area: Miscellaneous Properties

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_MAPPING_SIGNATURE, ptagMappingSignature

2.881 PidTagMaximumSubmitMessageSize

Canonical name: PidTagMaximumSubmitMessageSize

Description: Maximum size, in kilobytes, of a message a user is allowed to submit for transmission to another user.

Property ID: 0x666D

Data type: PtypInteger32, 0x0003

Area: Message Store Properties

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_MAX_SUBMIT_MESSAGE_SIZE

2.882 PidTagMemberId

Canonical name: PidTagMemberId

Description: Contains a unique identifier that the messaging server generates for each user.

Property ID: 0x6671

Data type: PtypInteger64, 0x0014

Area: Access Control Properties

References: [\[MS-OXCPERM\]](#)

Alternate names: PR_MEMBER_ID, ptagMemberId

2.883 PidTagMemberName

Canonical name: PidTagMemberName

Description: Contains the user-readable name of the user.

Property ID: 0x6672

Data type: PtypString, 0x001F

Area: Access Control Properties

References: [\[MS-OXCPERM\]](#)

Alternate names: PR_MEMBER_NAME, PR_MEMBER_NAME_A, ptagMemberName, PR_MEMBER_NAME_W

2.884 PidTagMemberRights

Canonical name: PidTagMemberRights

Description: Contains the **permissions** for the specified user.

Property ID: 0x6673

Data type: **PtypInteger32**, 0x0003

Area: Access Control Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCPERM\]](#), [\[MS-OXODLGT\]](#)

Alternate names: PR_MEMBER_RIGHTS, ptagMemberRights

2.885 PidTagMessageAttachments

Canonical name: PidTagMessageAttachments

Description: Identifies all attachments to the current message.

Property ID: 0x0E13

Data type: **PtypObject**, 0x000D

Area: Message Attachment Properties

References: [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#)

Alternate names: PR_MESSAGE_ATTACHMENTS, ptagMessageAttachments

2.886 PidTagMessageCcMe

Canonical name: PidTagMessageCcMe

Description: Indicates that the receiving mailbox owner is a carbon copy (Cc) recipient of this e-mail message.

Property ID: 0x0058

Data type: **PtypBoolean**, 0x000B

Area: General Message Properties

References: [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_CC_ME, ptagMessageCcMe

2.887 PidTagMessageClass

Canonical name: PidTagMessageClass

Description: Denotes the specific type of the Message object.

Property ID: 0x001A

Data type: **PtypString**, 0x001F

Area: Common Property set

References: [\[MS-OXCFOLD\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXCADATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXBBODY\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCROPS\]](#), [\[MS-OXCASYNC\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORSS\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXOSMIME\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXOSRCH\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXOUM\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_MESSAGE_CLASS, PR_MESSAGE_CLASS_A, ptagMessageClass, PR_MESSAGE_CLASS_W, <http://schemas.microsoft.com/exchange/outlookmessageclass><http://schemas.microsoft.com/exchange/outlookmessageclass>

2.888 PidTagMessageCodepage

Canonical name: PidTagMessageCodepage

Description: Specifies the code page used to encode the **non-Unicode** string properties on this Message object.

Property ID: 0x3FFD

Data type: **PtypInteger32**, 0x0003

Area: Common

References: [\[MS-OXTNEF\]](#) [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXPFOAB\]](#),

Alternate names: PR_MESSAGE_CODEPAGE

2.889 PidTagMessageDeliveryTime

Canonical name: PidTagMessageDeliveryTime

Description: Contains the posting date of the item or entry.

Property ID: 0x0E06

Data type: **PtypTime**, 0x0040

Area: Message Time Properties Property set

References: [\[MS-OXCADATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXPROTO\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXORSS\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_MESSAGE_DELIVERY_TIME, urn:schemas:httpmail:datereceived

2.890 PidTagMessageEditorFormat

Canonical name: PidTagMessageEditorFormat

Property ID: 0x5909

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MSG_EDITOR_FORMAT, ptagMsgEditorFormat

2.891 PidTagMessageFlags

Canonical name: PidTagMessageFlags

Description: Specifies the status of the Message object.

Property ID: 0x0E07

Data type: PtypInteger32, 0x0003

Area: General Message Properties

References: [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORSS\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSFLD\]](#), [\[MS-OXOSMMS\]](#)

Alternate names: PR_MESSAGE_FLAGS, ptagMessageFlags

2.892 PidTagMessageHandlingSystemCommonName

Canonical name: PidTagMessageHandlingSystemCommonName

Description: Contains the **common name** of a messaging user for use in a message header.

Property ID: 0x3A0F

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_MHS_COMMON_NAME, PR_MHS_COMMON_NAME_A, PR_MHS_COMMON_NAME_W, urn:schemas:contacts:dn

2.893 PidTagMessageLocaleId

Canonical name: PidTagMessageLocaleId

Description: Contains the Windows Locale ID of the end-user who created this message.

Property ID: 0x3FF1

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_LOCALE_ID

2.894 PidTagMessageRecipientMe

Canonical name: PidTagMessageRecipientMe

Description: Indicates that the receiving mailbox owner is a primary or a carbon copy (Cc) recipient of this e-mail message.

Property ID: 0x0059

Data type: PtypBoolean, 0x000B

Area: General Message Properties

References: [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_RECIP_ME, ptagMessageRecipMe

2.895 PidTagMessageRecipients

Canonical name: PidTagMessageRecipients

Description: Identifies all recipients of the current message.

Property ID: 0x0E12

Data type: PtypObject, 0x000D

Area: Address Properties

References: [\[MS-OXCDATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_RECIPIENTS, ptagMessageRecipients

2.896 PidTagMessageSize

Canonical name: PidTagMessageSize

Description: Contains the size in bytes consumed by the Message object on the server.

Property ID: 0x0E08

Data type: PtypInteger32, 0x0003

Area: General Message Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_MESSAGE_SIZE, ptagMessageSize

2.897 PidTagMessageSizeExtended

Canonical name: PidTagMessageSizeExtended

Description: Specifies the 64-bit version of the [PidTagNormalMessageSize](#) property (section [2.911](#)).

Property ID: 0x0E08

Data type: PtypInteger64, 0x0014

Area: General Message Properties

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCSTOR\]](#)

Alternate names: PR_MESSAGE_SIZE_EXTENDED, ptagMessageSizeExtended

2.898 PidTagMessageStatus

Canonical name: PidTagMessageStatus

Description: Specifies the status of a message in a **contents table**.

Property ID: 0x0E17

Data type: PtypInteger32, 0x0003

Area: General Message Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_MSG_STATUS, ptagMsgStatus

2.899 PidTagMessageSubmissionId

Canonical name: PidTagMessageSubmissionId

Property ID: 0x0047

Data type: PtypBinary, 0x0102

Area: Email

References: [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_SUBMISSION_ID, ptagMessageSubmissionId

2.900 PidTagMessageToMe

Canonical name: PidTagMessageToMe

Description: Indicates that the receiving mailbox owner is one of the primary recipients of this e-mail message.

Property ID: 0x0057

Data type: PtypBoolean, 0x000B

Area: General Message Properties

References: [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_MESSAGE_TO_ME, ptagMessageToMe

2.901 PidTagMid

Canonical name: PidTagMid

Description: Contains a value that contains the MID of the message currently being synchronized.

Property ID: 0x674A

Data type: **PtypInteger64**, 0x0014

Area: ID Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXPROTO\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: ptagMID, <http://schemas.microsoft.com/exchange/mid>

2.902 PidTagMiddleName

Canonical name: PidTagMiddleName

Description: Specifies the middle name(s) of the contact.

Property ID: 0x3A44

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_MIDDLE_NAME, PR_MIDDLE_NAME_A, PR_MIDDLE_NAME_W, urn:schemas:contacts:middlename

2.903 PidTagMimeSkeleton

Canonical name: PidTagMimeSkeleton

Property ID: 0x0470

Data type: **PtypBinary**, 0x0102

Area: MIME properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagMimeSkeleton

2.904 PidTagMobileTelephoneNumber

Canonical name: PidTagMobileTelephoneNumber

Description: Contains the mail user's cellular telephone number.

Property ID: 0x3A1C

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_MOBILE_TELEPHONE_NUMBER, PR_MOBILE_TELEPHONE_NUMBER_A, PR_MOBILE_TELEPHONE_NUMBER_W, urn:schemas:contacts:mobile

2.905 PidTagNativeBody

Canonical name: PidTagNativeBody

Description: Indicates the best available format for storing the message body.

Property ID: 0x1016

Data type: **PtypInteger32**, 0x0003

Area: BestBody

References: [\[MS-OXBBODY\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_NATIVE_BODY_INFO, ptagNativeBodyInfo

2.906 PidTagNewAttach

Canonical name: PidTagNewAttach

Property ID: 0x4000

Data type: **PtypInteger32**, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagNewAttach

2.907 PidTagNewFXFolder

Canonical name: PidTagNewFXFolder

Description: Contains a value that provides information about alternative **replicas** for a public folder in context.

Property ID: 0x4011

Data type: **PtypBinary**, 0x0102

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagNewFXFolder

2.908 PidTagNextSendAcct

Canonical name: PidTagNextSendAcct

Description: Specifies the server that a client is currently attempting to use to send e-mail.

Property ID: 0x0E29

Data type: **PtypString**, 0x001F

Area: Outlook Application

References: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_NEXT_SEND_ACCT

2.909 PidTagNickname

Canonical name: PidTagNickname

Description: Contains the mail user's nickname.

Property ID: 0x3A4F

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_NICKNAME, PR_NICKNAME_A, PR_NICKNAME_W, urn:schemas:contacts:nickname

2.910 PidTagNormalizedSubject

Canonical name: PidTagNormalizedSubject

Description: Contains the normalized subject of the message.

Property ID: 0x0E1D

Data type: **PtypString**, 0x001F

Area: Email Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_NORMALIZED_SUBJECT, PR_NORMALIZED_SUBJECT_A, ptagNormalizedSubject, PR_NORMALIZED_SUBJECT_W, urn:schemas:httpmail:normalizedsubject

2.911 PidTagNormalMessageSize

Canonical name: PidTagNormalMessageSize

Property ID: 0x66B3

Data type: PtypInteger32, 0x0003

Area: Server

References: [\[MS-OXCFOLD\]](#), [\[MS-XWDFOLD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_NORMAL_MESSAGE_SIZE,
<http://schemas.microsoft.com/exchange/foldersize>

2.912 PidTagObjectType

Canonical name: PidTagObjectType

Description: Indicates the type of **Server object**.

Property ID: 0x0FFE

Data type: PtypInteger32, 0x0003

Area: Common

References: [\[MS-NSPI\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_OBJECT_TYPE, ptagObjectType

2.913 PidTagOfficeLocation

Canonical name: PidTagOfficeLocation

Description: Contains the mail user's office location.

Property ID: 0x3A19

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-NSPI\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OFFICE_LOCATION, PR_OFFICE_LOCATION_A, PR_OFFICE_LOCATION_W,
<urn:schemas:contacts:roomnumber>

2.914 PidTagOfflineAddressBookCompressedSize

Canonical name: PidTagOfflineAddressBookCompressedSize

Description: Contains the compressed size of the offline address book.

Property ID: 0x6809

Data type: PtypInteger32, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_OAB_COMPRESSED_SIZE

2.915 PidTagOfflineAddressBookContainerGuid

Canonical name: PidTagOfflineAddressBookContainerGuid

Description: A string formatted GUID that represents the **address list** container object.

Property ID: 0x6802

Data type: PtypString8, 0x001E

Area: Offline Address Book Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_OAB_CONTAINER_GUID, PR_OAB_CONTAINER_GUID_W

2.916 PidTagOfflineAddressBookDistinguishedName

Canonical name: PidTagOfflineAddressBookDistinguishedName

Description: The addresslist-X500-dn of the address list container object.

Property ID: 0x6804

Data type: PtypString8, 0x001E

Area: Offline Address Book Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_OAB_DN, PR_OAB_DN_W

2.917 PidTagOfflineAddressBookFileSize

Canonical name: PidTagOfflineAddressBookFileSize

Description: Contains the uncompressed size of the offline address book.

Property ID: 0x680A

Data type: PtypInteger32, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_OAB_FILE_SIZE

2.918 PidTagOfflineAddressBookFileType

Canonical name: PidTagOfflineAddressBookFileType

Description: Contains the file type of the offline address book.

Property ID: 0x6808

Data type: PtypInteger32, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_OAB_FILETYPE

2.919 PidTagOfflineAddressBookLanguageId

Canonical name: PidTagOfflineAddressBookLanguageId

Description: Contains the language id used in the offline address book.

Property ID: 0x6807

Data type: PtypInteger32, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_OAB_LANGID

2.920 PidTagOfflineAddressBookMessageClass

Canonical name: PidTagOfflineAddressBookMessageClass

Description: Contains the message class for full OAB messages.

Property ID: 0x6803

Data type: PtypInteger32, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXPFOAB\]](#)

Alternate names: PR_OAB_MESSAGE_CLASS

2.921 PidTagOfflineAddressBookName

Canonical name: PidTagOfflineAddressBookName

Description: Contains the display name of the address list.

Property ID: 0x6800

Data type: PtypString, 0x001F

Area: Offline Address Book Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_OAB_NAME, PR_OAB_NAME_W

2.922 PidTagOfflineAddressBookSequence

Canonical name: PidTagOfflineAddressBookSequence

Description: The sequence number of the OAB.

Property ID: 0x6801

Data type: **PtypInteger32**, 0x0003

Area: Offline Address Book Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_OAB_SEQUENCE

2.923 PidTagOfflineAddressBookShaHash

Canonical name: PidTagOfflineAddressBookShaHash

Description: Contains the hash function used to encode objects in the offline address book.

Property ID: 0x6806

Data type: **PtypBinary**, 0x0102

Area: Offline Address Book Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_OAB_SHA_HASH

2.924 PidTagOfflineAddressBookTruncatedProperties

Canonical name: PidTagOfflineAddressBookTruncatedProperties

Description: Contains a list of the property tags that have been truncated or limited by the server.

Property ID: 0x6805

Data type: **PtypMultipleInteger32**, 0x1003

Area: Offline Address Book Properties

References: [\[MS-OXOAB\]](#)

Alternate names: PR_OAB_TRUNCATED_PROPS

2.925 PidTagOrdinalMost

Canonical name: PidTagOrdinalMost

Description: Contains a positive number whose negative is less than or equal to the value of [PidLidTaskOrdinal](#) (section [2.325](#)) of all Task objects in the folder.

Property ID: 0x36E2

Data type: **PtypInteger32**, 0x0003

Area: Tasks

References: [\[MS-OXOTASK\]](#)

Alternate names: PR_ORDINAL_MOST

2.926 PidTagOrganizationalIdNumber

Canonical name: PidTagOrganizationalIdNumber

Description: Contains an identifier for the mail user used within the mail user's organization.

Property ID: 0x3A10

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_ORGANIZATIONAL_ID_NUMBER, PR_ORGANIZATIONAL_ID_NUMBER_A, PR_ORGANIZATIONAL_ID_NUMBER_W, urn:schemas:contacts:employeenumber

2.927 PidTagOriginalDeliveryTime

Canonical name: PidTagOriginalDeliveryTime

Description: Contains the delivery time from the original message.

Property ID: 0x0055

Data type: **PtypTime**, 0x0040

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_DELIVERY_TIME, ptagOriginalDeliveryTime

2.928 PidTagOriginalDisplayBcc

Canonical name: PidTagOriginalDisplayBcc

Description: Contains the value of [PidTagDisplayBcc](#) (section [2.746](#)) from the original message.

Property ID: 0x0072

Data type: **PtypString**, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_DISPLAY_BCC, PR_ORIGINAL_DISPLAY_BCC_A, ptagOriginalDisplayBcc, PR_ORIGINAL_DISPLAY_BCC_W, <http://schemas.microsoft.com/exchange/originaldisplaybcc>

2.929 PidTagOriginalDisplayCc

Canonical name: PidTagOriginalDisplayCc

Description: Contains the value of [PidTagDisplayCc](#) (section [2.747](#)) from the original message.

Property ID: 0x0073

Data type: **PtypString**, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_DISPLAY_CC, PR_ORIGINAL_DISPLAY_CC_A, ptagOriginalDisplayCc, PR_ORIGINAL_DISPLAY_CC_W, <http://schemas.microsoft.com/exchange/originaldisplaycc>, http://schemas.microsoft.com/mapi/original_display_cc

2.930 PidTagOriginalDisplayName

Canonical name: PidTagOriginalDisplayName

Description: Contains a display name.

Property ID: 0x3A13

Data type: **PtypString**, 0x001F

Area: General Message Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_ORIGINAL_DISPLAY_NAME, PR_ORIGINAL_DISPLAY_NAME_A, ptagOriginalDisplayName, PR_ORIGINAL_DISPLAY_NAME_W

2.931 PidTagOriginalDisplayTo

Canonical name: PidTagOriginalDisplayTo

Description: Contains the value of [PidTagDisplayTo](#) (section [2.750](#)) from the original message.

Property ID: 0x0074

Data type: **PtypString**, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_DISPLAY_TO, PR_ORIGINAL_DISPLAY_TO_A, ptagOriginalDisplayTo, PR_ORIGINAL_DISPLAY_TO_W,

<http://schemas.microsoft.com/exchange/originaldisplayto>,
http://schemas.microsoft.com/mapi/original_display_to

2.932 PidTagOriginalEntryId

Canonical name: PidTagOriginalEntryId

Description: Contains the original entry ID of an object.

Property ID: 0x3A12

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXCSYNC\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_ORIGINAL_ENTRYID, ptagOriginalEntryId

2.933 PidTagOriginalMessageClass

Canonical name: PidTagOriginalMessageClass

Property ID: 0x004B

Data type: PtypString, 0x001F

Area: Secure Messaging Properties

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_ORIG_MESSAGE_CLASS, PR_ORIG_MESSAGE_CLASS_A,
PR_ORIG_MESSAGE_CLASS_W

2.934 PidTagOriginalMessageId

Canonical name: PidTagOriginalMessageId

Property ID: 0x1046

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagOriginalInternetMessageID, OriginalMessageId

2.935 PidTagOriginalSearchKey

Canonical name: PidTagOriginalSearchKey

Description: Contains a search key.

Property ID: 0x3A14

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXOABK\]](#)

Alternate names: PR_ORIGINAL_SEARCH_KEY, ptagOriginalSearchKey

2.936 PidTagOriginalSenderAddressType

Canonical name: PidTagOriginalSenderAddressType

Description: Contains the value of the original message sender's [PidTagSenderAddressType](#) (section [2.1113](#)).

Property ID: 0x0066

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENDER_ADDRTYPE, PR_ORIGINAL_SENDER_ADDRTYPE_A, ptagOriginalSenderAddrType, PR_ORIGINAL_SENDER_ADDRTYPE_W

2.937 PidTagOriginalSenderEmailAddress

Canonical name: PidTagOriginalSenderEmailAddress

Description: Contains the value of the original message sender's [PidTagSenderEmailAddress](#) property (section [2.1114](#)).

Property ID: 0x0067

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENDER_EMAIL_ADDRESS, PR_ORIGINAL_SENDER_EMAIL_ADDRESS_A, PR_ORIGINAL_SENDER_EMAIL_ADDRESS_W

2.938 PidTagOriginalSenderEntryId

Canonical name: PidTagOriginalSenderEntryId

Description: Contains an address book Entry ID that is set on delivery report messages, to the value of the [PidTagSenderEntryId](#) property (section [2.1115](#)) from the original message.

Property ID: 0x005B

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENDER_ENTRYID, ptagOriginalSenderEntryId

2.939 PidTagOriginalSenderName

Canonical name: PidTagOriginalSenderName

Description: Contains the value of the original message sender's [PidTagSenderName](#) property (section [2.1118](#)), and is set on delivery report messages.

Property ID: 0x005A

Data type: **PtypString**, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENDER_NAME, PR_ORIGINAL_SENDER_NAME_A, ptagOriginalSenderName, PR_ORIGINAL_SENDER_NAME_W, <http://schemas.microsoft.com/exchange/originalsendername>

2.940 PidTagOriginalSenderSearchKey

Canonical name: PidTagOriginalSenderSearchKey

Description: Contains an address book search key set on the original e-mail message.

Property ID: 0x005C

Data type: **PtypBinary**, 0x0102

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENDER_SEARCH_KEY, ptagOriginalSenderSearchKey

2.941 PidTagOriginalSensitivity

Canonical name: PidTagOriginalSensitivity

Description: Contains the sensitivity value of the original e-mail message.

Property ID: 0x002E

Data type: **PtypInteger32**, 0x0003

Area: General Message Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENSITIVITY, ptagOriginalSensitivity

2.942 PidTagOriginalSentRepresentingAddressType

Canonical name: PidTagOriginalSentRepresentingAddressType

Description: Contains the address type of the end user who is represented by the original e-mail message sender.

Property ID: 0x0068

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENT_REPRESENTING_ADDRTYPE,
PR_ORIGINAL_SENT_REPRESENTING_ADDRTYPE_A, ptagOriginalSentRepresentingAddrType,
PR_ORIGINAL_SENT_REPRESENTING_ADDRTYPE_W

2.943 PidTagOriginalSentRepresentingEmailAddress

Canonical name: PidTagOriginalSentRepresentingEmailAddress

Description: Contains the e-mail address of the end user who is represented by the original e-mail message sender.

Property ID: 0x0069

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENT_REPRESENTING_EMAIL_ADDRESS,
PR_ORIGINAL_SENT_REPRESENTING_EMAIL_ADDRESS_A,
PR_ORIGINAL_SENT_REPRESENTING_EMAIL_ADDRESS_W

2.944 PidTagOriginalSentRepresentingEntryId

Canonical name: PidTagOriginalSentRepresentingEntryId

Description: Identifies an address book EntryID that contains the entry identifier of the end user who is represented by the original message sender.

Property ID: 0x005E

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENT_REPRESENTING_ENTRYID,
ptagOriginalSentRepresentingEntryId

2.945 PidTagOriginalSentRepresentingName

Canonical name: PidTagOriginalSentRepresentingName

Description: Contains the display name of the end user who is represented by the original e-mail message sender.

Property ID: 0x005D

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENT_REPRESENTING_NAME, PR_ORIGINAL_SENT_REPRESENTING_NAME_A, ptagOriginalSentRepresentingName, PR_ORIGINAL_SENT_REPRESENTING_NAME_W

2.946 PidTagOriginalSentRepresentingSearchKey

Canonical name: PidTagOriginalSentRepresentingSearchKey

Description: Identifies an address book search key that contains the SearchKey of the end user who is represented by the original message sender.

Property ID: 0x005F

Data type: PtypBinary, 0x0102

Area: General Message Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SENT_REPRESENTING_SEARCH_KEY, ptagOriginalSentRepresentingSearchKey

2.947 PidTagOriginalSubject

Canonical name: PidTagOriginalSubject

Description: Specifies the subject of the original message.

Property ID: 0x0049

Data type: PtypString, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXCSYNC\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SUBJECT, PR_ORIGINAL_SUBJECT_A, ptagOriginalSubject, PR_ORIGINAL_SUBJECT_W, <http://schemas.microsoft.com/exchange/originalsubject>, http://schemas.microsoft.com/mapi/original_subject

2.948 PidTagOriginalSubmitTime

Canonical name: PidTagOriginalSubmitTime

Description: Specifies the original e-mail message's submission date and time.

Property ID: 0x004E

Data type: PtypTime, 0x0040

Area: General Message Properties Property set

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINAL_SUBMIT_TIME, ptagOriginalSubmitTime,
<http://schemas.microsoft.com/exchange/originaldate>,
http://schemas.microsoft.com/mapi/original_submit_time

2.949 PidTagOriginatorDeliveryReportRequested

Canonical name: PidTagOriginatorDeliveryReportRequested

Description: Indicates whether an e-mail sender requests an e-mail **delivery receipt** from the messaging system.

Property ID: 0x0023

Data type: PtypBoolean, 0x000B

Area: MIME Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_ORIGINATOR_DELIVERY_REPORT_REQUESTED,
<http://schemas.microsoft.com/exchange/deliveryreportrequested>

2.950 PidTagOriginatorNonDeliveryReportRequested

Canonical name: PidTagOriginatorNonDeliveryReportRequested

Description: Specifies whether an e-mail sender requests suppression of nondelivery receipts.

Property ID: 0x0C08

Data type: PtypBoolean, 0x000B

Area: MIME Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_ORIGINATOR_NON_DELIVERY_REPORT_REQUESTED

2.951 PidTagOtherAddressCity

Canonical name: PidTagOtherAddressCity

Description: Contains the name of the mail user's other locality, such as the town or city.

Property ID: 0x3A5F

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_ADDRESS_CITY, PR_OTHER_ADDRESS_CITY_A,
PR_OTHER_ADDRESS_CITY_W, urn:schemas:contacts:othercity

2.952 PidTagOtherAddressCountry

Canonical name: PidTagOtherAddressCountry

Description: Contains the name of the mail user's other country/region.

Property ID: 0x3A60

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_OTHER_ADDRESS_COUNTRY, PR_OTHER_ADDRESS_COUNTRY_A, PR_OTHER_ADDRESS_COUNTRY_W, urn:schemas:contacts:othercountry

2.953 PidTagOtherAddressPostalCode

Canonical name: PidTagOtherAddressPostalCode

Description: Contains the postal code for the mail user's other postal address.

Property ID: 0x3A61

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_ADDRESS_POSTAL_CODE, PR_OTHER_ADDRESS_POSTAL_CODE_A, PR_OTHER_ADDRESS_POSTAL_CODE_W, urn:schemas:contacts:otherpostalcode

2.954 PidTagOtherAddressPostOfficeBox

Canonical name: PidTagOtherAddressPostOfficeBox

Description: Contains the number or identifier of the mail user's other post office box.

Property ID: 0x3A64

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_ADDRESS_POST_OFFICE_BOX, PR_OTHER_ADDRESS_POST_OFFICE_BOX_A, PR_OTHER_ADDRESS_POST_OFFICE_BOX_W, urn:schemas:contacts:otherpostofficebox

2.955 PidTagOtherAddressStateOrProvince

Canonical name: PidTagOtherAddressStateOrProvince

Description: Contains the name of the mail user's other state or province.

Property ID: 0x3A62

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_ADDRESS_STATE_OR_PROVINCE, PR_OTHER_ADDRESS_STATE_OR_PROVINCE_A, PR_OTHER_ADDRESS_STATE_OR_PROVINCE_W, urn:schemas:contacts:otherstate

2.956 PidTagOtherAddressStreet

Canonical name: PidTagOtherAddressStreet

Description: Contains the mail user's other street address.

Property ID: 0x3A63

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_ADDRESS_STREET, PR_OTHER_ADDRESS_STREET_A, PR_OTHER_ADDRESS_STREET_W, urn:schemas:contacts:otherstreet

2.957 PidTagOtherTelephoneNumber

Canonical name: PidTagOtherTelephoneNumber

Description: Contains an alternate telephone number for the mail user.

Property ID: 0x3A1F

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_OTHER_TELEPHONE_NUMBER, PR_OTHER_TELEPHONE_NUMBER_A, PR_OTHER_TELEPHONE_NUMBER_W, urn:schemas:contacts:otherTelephone

2.958 PidTagOutOfOfficeState

Canonical name: PidTagOutOfOfficeState

Description: Indicates whether the user is **OOF**.

Property ID: 0x661D

Data type: PtypBoolean, 0x000B

Area: Message Store Properties

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_OOF_STATE, ptagOOFState

2.959 PidTagOwnerAppointmentId

Canonical name: PidTagOwnerAppointmentId

Description: Specifies a quasi-unique value among all Calendar objects in a user's mailbox.

Property ID: 0x0062

Data type: **PtypInteger32**, 0x0003

Area: Appointment Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#)

Alternate names: PR_OWNER_APPT_ID, http://schemas.microsoft.com/mapi/owner_appt_id

2.960 PidTagPagerTelephoneNumber

Canonical name: PidTagPagerTelephoneNumber

Description: Contains the mail user's pager telephone number.

Property ID: 0x3A21

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-EXOAB\]](#), [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_PAGER_TELEPHONE_NUMBER, PR_PAGER_TELEPHONE_NUMBER_A, PR_PAGER_TELEPHONE_NUMBER_W, <urn:schemas:contacts:pager>

2.961 PidTagParentEntryId

Canonical name: PidTagParentEntryId

Description: Contains the entry ID of the folder where messages reside.

Property ID: 0x0E09

Data type: **PtypBinary**, 0x0102

Area: ID Properties

References: [\[MS-OXCDATA\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXOSFLD\]](#), [\[MS-XPFOAB\]](#)

Alternate names: PR_PARENT_ENTRYID, ptagParentEntryId

2.962 PidTagParentFolderId

Canonical name: PidTagParentFolderId

Description: Contains a value that contains the FID that identifies the parent folder of the messaging object being synchronized.

Property ID: 0x6749

Data type: **PtypInteger64**, 0x0014

Area: ID Properties

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagParentFID

2.963 PidTagParentKey

Canonical name: PidTagParentKey

Description: Contains the search key that is used to correlate the original message and the reports about the original message.

Property ID: 0x0025

Data type: **PtypBinary**, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_PARENT_KEY, ptagParentKey

2.964 PidTagParentSourceKey

Canonical name: PidTagParentSourceKey

Description: Contains a value on a folder that contains the [PidTagSourceKey](#) (section [2.1137](#)) of the parent folder.

Property ID: 0x65E1

Data type: **PtypBinary**, 0x0102

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_PARENT_SOURCE_KEY

2.965 PidTagPersonalHomePage

Canonical name: PidTagPersonalHomePage

Description: Contains the Web address (URL) of the mail user's personal home page.

Property ID: 0x3A50

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_PERSONAL_HOME_PAGE, PR_PERSONAL_HOME_PAGE_A, PR_PERSONAL_HOME_PAGE_W, urn:schemas:contacts:personalHomePage

2.966 PidTagPolicyTag

Canonical name: PidTagPolicyTag

Property ID: 0x3019

Data type: PtypBinary, 0x0102

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_POLICY_TAG, ptagPolicyTag

2.967 PidTagPostalAddress

Canonical name: PidTagPostalAddress

Description: Contains the mail user's postal address.

Property ID: 0x3A15

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_POSTAL_ADDRESS, PR_POSTAL_ADDRESS_A, PR_POSTAL_ADDRESS_W, urn:schemas:contacts:mailingpostaladdress

2.968 PidTagPostalCode

Canonical name: PidTagPostalCode

Description: Contains the postal code for the mail user's postal address.

Property ID: 0x3A2A

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_POSTAL_CODE, PR_POSTAL_CODE_A, PR_POSTAL_CODE_W, PR_BUSINESS_ADDRESS_POSTAL_CODE, PR_BUSINESS_ADDRESS_POSTAL_CODE_A, PR_BUSINESS_ADDRESS_POSTAL_CODE_W, urn:schemas:contacts:mailingpostalcode

2.969 PidTagPostOfficeBox

Canonical name: PidTagPostOfficeBox

Description: Contains the number or identifier of the mail user's post office box.

Property ID: 0x3A2B

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_POST_OFFICE_BOX, PR_POST_OFFICE_BOX_A, PR_POST_OFFICE_BOX_W, PR_BUSINESS_ADDRESS_POST_OFFICE_BOX, PR_BUSINESS_ADDRESS_POST_OFFICE_BOX_A, PR_BUSINESS_ADDRESS_POST_OFFICE_BOX_W, urn:schemas:contacts:mailingpostofficebox

2.970 PidTagPredecessorChangeList

Canonical name: PidTagPredecessorChangeList

Description: Contains a value that contains a serialized representation of a **PredecessorChangeList** structure.

Property ID: 0x65E3

Data type: **PtypBinary**, 0x0102

Area: Sync

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_PREDECESSOR_CHANGE_LIST

2.971 PidTagPrimaryFaxNumber

Canonical name: PidTagPrimaryFaxNumber

Description: Contains the telephone number of the mail user's primary fax machine.

Property ID: 0x3A23

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_PRIMARY_FAX_NUMBER, PR_PRIMARY_FAX_NUMBER_A, PR_PRIMARY_FAX_NUMBER_W, urn:schemas:contacts:otherfax

2.972 PidTagPrimarySendAccount

Canonical name: PidTagPrimarySendAccount

Description: Specifies the first server that a client is to use to send the e-mail with.

Property ID: 0x0E28

Data type: **PtypString**, 0x001F

Area: MapiNonTransmittable

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_PRIMARY_SEND_ACCT

2.973 PidTagPrimarySmtpAddress

Canonical name: PidTagPrimarySmtpAddress

Property ID: 0x39FE

Data type: **PtypString**, 0x001F

Area: MapiAddressBook

References: [\[MS-OXCFXICS\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: ptagPrimarySMTPAddress

2.974 PidTagPrimaryTelephoneNumber

Canonical name: PidTagPrimaryTelephoneNumber

Description: Contains the mail user's primary telephone number.

Property ID: 0x3A1A

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXVCARD\]](#), [\[MS-OXOCNTC\]](#), [\[MS-NSPI\]](#)

Alternate names: PR_PRIMARY_TELEPHONE_NUMBER, PR_PRIMARY_TELEPHONE_NUMBER_A, PR_PRIMARY_TELEPHONE_NUMBER_W

2.975 PidTagPriority

Canonical name: PidTagPriority

Description: Indicates the client's request for the priority at which the message is to be sent by the messaging system.

Property ID: 0x0026

Data type: **PtypInteger32**, 0x0003

Area: Email Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXODOC\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_PRIORITY, ptagPriority, urn:schemas:httpmail:priority, urn:schemas:httpmail:priority

2.976 PidTagProcessed

Canonical name: PidTagProcessed

Description: Indicates whether a client has already processed a received task communication.

Property ID: 0x7D01

Data type: PtypBoolean, 0x000B

Area: Calendar

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOTASK\]](#)

Alternate names: PR_PROCESSED

2.977 PidTagProfession

Canonical name: PidTagProfession

Description: Contains the name of the mail user's line of business.

Property ID: 0x3A46

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_PROFESSION, PR_PROFESSION_A, PR_PROFESSION_W,
urn:schemas:contacts:profession

2.978 PidTagProhibitReceiveQuota

Canonical name: PidTagProhibitReceiveQuota

Description: Maximum size, in kilobytes, a user is allowed to accumulate in their mailbox, before no further e-mail will be delivered.

Property ID: 0x666A

Data type: PtypInteger32, 0x0003

Area: Exchange Administrative

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_PROHIBIT_RECEIVE_QUOTA, ptagProhibitReceiveQuota

2.979 PidTagProhibitSendQuota

Canonical name: PidTagProhibitSendQuota

Description: Maximum size, in kilobytes, a user is allowed to accumulate in their mailbox, before the user can no longer submit any more e-mail.

Property ID: 0x666E

Data type: PtypInteger32, 0x0003

Area: ExchangeAdministrative

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_PROHIBIT_SEND_QUOTA, ptagProhibitSendQuota

2.980 PidTagProviderSubmitTime

Canonical name: PidTagProviderSubmitTime

Property ID: 0x0048

Data type: PtypTime, 0x0040

Area: Email

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_PROVIDER_SUBMIT_TIME

2.981 PidTagPublicFolderAdministrativeDescription

Canonical name: PidTagPublicFolderAdministrativeDescription

Property ID: 0x671C

Data type: PtypString, 0x001F

Area: Folder Properties

References: [\[MS-XWDEXT\]](#), [\[MS-XWDFOLD\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/adminfolderdescription>

2.982 PidTagPublicFolderProxy

Canonical name: PidTagPublicFolderProxy

Property ID: 0x671D

Data type: PtypBinary, 0x0102

Area: Folder Properties

References: [\[MS-XWDEXT\]](#), [\[MS-XWDFOLD\]](#)

Alternate names: <http://schemas.microsoft.com/exchange/folderproxy>

2.983 PidTagPurportedSenderDomain

Canonical name: PidTagPurportedSenderDomain

Property ID: 0x4083

Data type: PtypString, 0x001F

Area: TransportEnvelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: PR_PURPORTED_SENDER_DOMAIN

2.984 PidTagRadioTelephoneNumber

Canonical name: PidTagRadioTelephoneNumber

Description: Contains the mail user's radio telephone number.

Property ID: 0x3A1D

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_RADIO_TELEPHONE_NUMBER, PR_RADIO_TELEPHONE_NUMBER_A, PR_RADIO_TELEPHONE_NUMBER_W

2.985 PidTagRead

Canonical name: PidTagRead

Property ID: 0x0E69

Data type: PtypBoolean, 0x000B

Area: MapiNonTransmittable Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXCFXICS\]](#) [\[MS-OXCMAIL\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_READ, ptagRead, urn:schemas:httpmail:read

2.986 PidTagReadReceiptAddressType

Canonical name: PidTagReadReceiptAddressType

Property ID: 0x4029

Data type: PtypString, 0x001F

Area: Transport Envelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagReadReceiptAddrType, ReadReceiptAddrType

2.987 PidTagReadReceiptEmailAddress

Canonical name: PidTagReadReceiptEmailAddress

Property ID: 0x402A

Data type: PtypString, 0x001F

Area: Transport Envelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagReadReceiptEmailAddr, ReadReceiptEmailAddress

2.988 PidTagReadReceiptEntryId

Canonical name: PidTagReadReceiptEntryId

Description: Contains an address book EntryID.

Property ID: 0x0046

Data type: PtypBinary, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_READ_RECEIPT_ENTRYID, ptagReadReceiptEntryId

2.989 PidTagReadReceiptName

Canonical name: PidTagReadReceiptName

Property ID: 0x402B

Data type: PtypString, 0x001F

Area: Transport Envelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagReadReceiptDisplayName, ReadReceiptDisplayName

2.990 PidTagReadReceiptRequested

Canonical name: PidTagReadReceiptRequested

Description: Specifies whether the e-mail sender requests a **read receipt** from all recipients when this e-mail message is read or opened.

Property ID: 0x0029

Data type: PtypBoolean, 0x000B

Area: Email Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODOC\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_READ_RECEIPT_REQUESTED, ptagReadReceiptRequested, <http://schemas.microsoft.com/exchange/readreceiptrequested>

2.991 PidTagReadReceiptSearchKey

Canonical name: PidTagReadReceiptSearchKey

Description: Contains an address book search key.

Property ID: 0x0053

Data type: PtypBinary, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_READ_RECEIPT_SEARCH_KEY, ptagReadReceiptSearchKey

2.992 PidTagReceivedByAddressType

Canonical name: PidTagReceivedByAddressType

Description: Contains the e-mail message receiver's e-mail address type.

Property ID: 0x0075

Data type: PtypString, 0x001F

Area: MapiEnvelope

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RECEIVED_BY_ADDRRTYPE, PR_RECEIVED_BY_ADDRRTYPE_A, ptagReceivedByAddrType, PR_RECEIVED_BY_ADDRRTYPE_W

2.993 PidTagReceivedByEmailAddress

Canonical name: PidTagReceivedByEmailAddress

Description: Contains the e-mail message receiver's e-mail address.

Property ID: 0x0076

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RECEIVED_BY_EMAIL_ADDRESS, PR_RECEIVED_BY_EMAIL_ADDRESS_A, PR_RECEIVED_BY_EMAIL_ADDRESS_W

2.994 PidTagReceivedByEntryId

Canonical name: PidTagReceivedByEntryId

Description: Identifies an address book EntryID that contains the e-mail message receiver of the E-mail object.

Property ID: 0x003F

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RECEIVED_BY_ENTRYID

2.995 PidTagReceivedByFlags

Canonical name: PidTagReceivedByFlags

Property ID: 0x401B

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: ptagRcvdByFlags

2.996 PidTagReceivedByName

Canonical name: PidTagReceivedByName

Description: Contains the e-mail message receiver's display name.

Property ID: 0x0040

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RECEIVED_BY_NAME, PR_RECEIVED_BY_NAME_A, PR_RECEIVED_BY_NAME_W

2.997 PidTagReceivedBySearchKey

Canonical name: PidTagReceivedBySearchKey

Description: Identifies an address book search key that contains a binary-comparable key that is used to identify correlated objects for a search.

Property ID: 0x0051

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RECEIVED_BY_SEARCH_KEY

2.998 PidTagReceivedRepresentingAddressType

Canonical name: PidTagReceivedRepresentingAddressType

Description: Contains the e-mail address type for the end user represented by the receiving mailbox owner.

Property ID: 0x0077

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RCVD_REPRESENTING_ADDRTYPE, PR_RCVD_REPRESENTING_ADDRTYPE_A, ptagRcvdRepresentingAddrType, PR_RCVD_REPRESENTING_ADDRTYPE_W

2.999 PidTagReceivedRepresentingEmailAddress

Canonical name: PidTagReceivedRepresentingEmailAddress

Description: Contains the e-mail address for the end user represented by the receiving mailbox owner.

Property ID: 0x0078

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RCVD_REPRESENTING_EMAIL_ADDRESS, PR_RCVD_REPRESENTING_EMAIL_ADDRESS_A, PR_RCVD_REPRESENTING_EMAIL_ADDRESS_W

2.1000 PidTagReceivedRepresentingEntryId

Canonical name: PidTagReceivedRepresentingEntryId

Description: Contains an address book EntryID that identifies the end user represented by the receiving mailbox owner.

Property ID: 0x0043

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RCVD_REPRESENTING_ENTRYID, ptagRcvdRepresentingEntryId

2.1001 PidTagReceivedRepresentingFlags

Canonical name: PidTagReceivedRepresentingFlags

Property ID: 0x401C

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: ptagRcvdRepresentingFlags

2.1002 PidTagReceivedRepresentingName

Canonical name: PidTagReceivedRepresentingName

Description: Contains the display name, for the end user represented by the receiving mailbox owner.

Property ID: 0x0044

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RCVD_REPRESENTING_NAME, PR_RCVD_REPRESENTING_NAME_A, ptagRcvdRepresentingName, PR_RCVD_REPRESENTING_NAME_W

2.1003 PidTagReceivedRepresentingSearchKey

Canonical name: PidTagReceivedRepresentingSearchKey

Description: Identifies an address book search key that contains a binary-comparable key of the end user represented by the receiving mailbox owner.

Property ID: 0x0052

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RCVD_REPRESENTING_SEARCH_KEY, ptagRcvdRepresentingSearchKey

2.1004 PidTagReceivedRepresentingSimpleDisplayName

Canonical name: PidTagReceivedRepresentingSimpleDisplayName

Property ID: 0x4035

Data type: PtypString, 0x001F

Area: TransportEnvelope

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagRcvdRepresentingSimpleDispName

2.1005 PidTagRecipientDisplayName

Canonical name: PidTagRecipientDisplayName

Property ID: 0x5FF6

Data type: PtypString, 0x001F

Area: TransportRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_DISPLAY_NAME, PR_RECIPIENT_DISPLAY_NAME_W

2.1006 PidTagRecipientEntryId

Canonical name: PidTagRecipientEntryId

Property ID: 0x5FF7

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_ENTRYID, ptagRecipientEntryId

2.1007 PidTagRecipientFlags

Canonical name: PidTagRecipientFlags

Property ID: 0x5FFD

Data type: PtypInteger32, 0x0003

Area: TransportRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOCAL\]](#)

Alternate names: PR_RECIPIENT_FLAGS

2.1008 PidTagRecipientOrder

Canonical name: PidTagRecipientOrder

Property ID: 0x5FDF

Data type: PtypInteger32, 0x0003

Area: TransportRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_ORDER, ptagRecipientOrder

2.1009 PidTagRecipientProposed

Canonical name: PidTagRecipientProposed

Property ID: 0x5FE1

Data type: PtypBoolean, 0x000B

Area: TransportRecipient

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_RECIPIENT_PROPOSED, ptagRecipientProposed

2.1010 PidTagRecipientProposedEndTime

Canonical name: PidTagRecipientProposedEndTime

Property ID: 0x5FE4

Data type: PtypTime, 0x0040

Area: TransportRecipient

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_RECIPIENT_PROPOSEDENDTIME, ptagRecipientProposedEndTime

2.1011 PidTagRecipientProposedStartTime

Canonical name: PidTagRecipientProposedStartTime

Property ID: 0x5FE3

Data type: PtypTime, 0x0040

Area: TransportRecipient

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_RECIPIENT_PROPOSEDSTARTTIME, ptagRecipientProposedStartTime

2.1012 PidTagRecipientReassignmentProhibited

Canonical name: PidTagRecipientReassignmentProhibited

Description: Specifies whether adding additional or different recipients is prohibited for the e-mail message, when forwarding the e-mail message.

Property ID: 0x002B

Data type: PtypBoolean, 0x000B

Area: MapiEnvelope

References: [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_REASSIGNMENT_PROHIBITED, ptagRecipientReassignmentProhibited

2.1013 PidTagRecipientResourceState

Canonical name: PidTagRecipientResourceState

Property ID: 0x5FDE

Data type: PtypInteger32, 0x0003

Area: TransportRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_RESOURCESTATE

2.1014 PidTagRecipientTrackStatus

Canonical name: PidTagRecipientTrackStatus

Property ID: 0x5FFF

Data type: PtypInteger32, 0x0003

Area: TransportRecipient

References: [\[MS-OXCICAL\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_RECIPIENT_TRACKSTATUS, ptagRecipientTrackStatus

2.1015 PidTagRecipientTrackStatusTime

Canonical name: PidTagRecipientTrackStatusTime

Property ID: 0x5FFB

Data type: PtypTime, 0x0040

Area: TransportRecipient

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_RECIPIENT_TRACKSTATUS_TIME, ptagRecipientTrackStatusTime

2.1016 PidTagRecipientType

Canonical name: PidTagRecipientType

Description: Represents the recipient type of a recipient on the message.

Property ID: 0x0C15

Data type: PtypInteger32, 0x0003

Area: MapiRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_RECIPIENT_TYPE, ptagRecipientType

2.1017 PidTagRecordKey

Canonical name: PidTagRecordKey

Description: Contains a unique binary-comparable identifier for a specific object.

Property ID: 0x0FF9

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_RECORD_KEY, ptagRecordKey

2.1018 PidTagReferredByName

Canonical name: PidTagReferredByName

Description: Contains the name of the mail user's referral.

Property ID: 0x3A47

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#)

Alternate names: PRREFERRED_BY_NAME, PRREFERRED_BY_NAME_A, PRREFERRED_BY_NAME_W

2.1019 PidTagRemindersOnlineEntryId

Canonical name: PidTagRemindersOnlineEntryId

Property ID: 0x36D5

Data type: PtypBinary, 0x0102

Area: MapiContainer

References: [\[MS-OXOSFLD\]](#)

Alternate names: PR_REM_ONLINE_ENTRYID, ptagRemOnlineEntryId

2.1020 PidTagRemoteHeaderLoc

Canonical name: PidTagRemoteHeaderLoc

Property ID: 0x0078

Data type: PtypString, 0x001F

Area: MapiEnvelope

References: [\[MS-OXODLGT\]](#)

Alternate names: PR_REMOTE_HEADER_LOC

2.1021 PidTagRemoteMessageTransferAgent

Canonical name: PidTagRemoteMessageTransferAgent

Property ID: 0x0C21

Data type: PtypString, 0x001F

Area: Transport Envelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagDsnRemoteMta, PR_DSN_REMOTE_MTA, RemoteMta

2.1022 PidTagRenderingPosition

Canonical name: PidTagRenderingPosition

Description: Represents an offset, in rendered characters, to use when rendering an attachment within the main message text.

Property ID: 0x370B

Data type: PtypInteger32, 0x0003

Area: MapiAttachment

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_RENDERING_POSITION, ptagRenderingPosition

2.1023 PidTagReplyRecipientEntries

Canonical name: PidTagReplyRecipientEntries

Description: Identifies a FlatEntryList of address book EntryIDs for recipients that are to get a reply.

Property ID: 0x004F

Data type: PtypBinary, 0x0102

Area: MapiEnvelope Property set

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_REPLY_RECIPIENT_ENTRIES, ptagReplyRecipientEntries, <http://schemas.microsoft.com/exchange/reply-to-base64>

2.1024 PidTagReplyRecipientNames

Canonical name: PidTagReplyRecipientNames

Description: Contains a list of display names for recipients that are to get a reply.

Property ID: 0x0050

Data type: **PtypString**, 0x001F

Area: MapiEnvelope

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_REPLY_RECIPIENT_NAMES, PR_REPLY_RECIPIENT_NAMES_A, ptagReplyRecipientNames, PR_REPLY_RECIPIENT_NAMES_W

2.1025 PidTagReplyRequested

Canonical name: PidTagReplyRequested

Description: Indicates whether a reply is requested to a Message object.

Property ID: 0x0C17

Data type: **PtypBoolean**, 0x000B

Area: MapiRecipient

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_REPLY_REQUESTED, ptagReplyRequested

2.1026 PidTagReplyTemplateId

Canonical name: PidTagReplyTemplateId

Property ID: 0x65C2

Data type: **PtypBinary**, 0x0102

Area: Rules

References: [\[MS-OXORULE\]](#)

Alternate names: PR_REPLY_TEMPLATE_ID, ptagReplyTemplateId

2.1027 PidTagReplyTime

Canonical name: PidTagReplyTime

Description: Specifies the due time that the sender wants for an associated work item.

Property ID: 0x0030

Data type: **PtypTime**, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_REPLY_TIME, urn:schemas:httpmail:reply-by, http://schemas.microsoft.com/exchange/reply-by-iso

2.1028 PidTagReportEntryId

Canonical name: PidTagReportEntryId

Property ID: 0x0045

Data type: PtypBinary, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_REPORT_ENTRYID, ptagReportEntryId

2.1029 PidTagReportingMessageTransferAgent

Canonical name: PidTagReportingMessageTransferAgent

Property ID: 0x6820

Data type: PtypString, 0x001F

Area: Transport Envelope

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagDsnReportingMta, ReportingMta

2.1030 PidTagReportName

Canonical name: PidTagReportName

Property ID: 0x003A

Data type: PtypString, 0x001F

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_REPORT_NAME, PR_REPORT_NAME_A, PR_REPORT_NAME_W

2.1031 PidTagReportSearchKey

Canonical name: PidTagReportSearchKey

Property ID: 0x0054

Data type: PtypBinary, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_REPORT_SEARCH_KEY, ptagReportSearchKey

2.1032 PidTagReportTag

Canonical name: PidTagReportTag

Description: Contains the data that is used to correlate the report and the original message.

Property ID: 0x0031

Data type: PtypBinary, 0x0102

Area: MapiEnvelope

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_REPORT_TAG, ptagReportTag

2.1033 PidTagReportText

Canonical name: PidTagReportText

Description: Contains the optional text for a report message.

Property ID: 0x1001

Data type: PtypString, 0x001F

Area: MapiMessage

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_REPORT_TEXT, PR_REPORT_TEXT_A, ptagReportText, PR_REPORT_TEXT_W

2.1034 PidTagReportTime

Canonical name: PidTagReportTime

Description: Indicates the last time the contact list that is controlled by [PidTagJunkIncludeContacts](#) (section [2.858](#)) was updated.

Property ID: 0x0032

Data type: PtypTime, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXCSPAM\]](#)

Alternate names: PR_REPORT_TIME, ptagReportTime,
<http://schemas.microsoft.com/exchange/reporttime>

2.1035 PidTagResolveMethod

Canonical name: PidTagResolveMethod

Property ID: 0x3FE7

Data type: PtypInteger32, 0x0003

Area: MapiStatus

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_RESOLVE_METHOD, ptagResolveMethod

2.1036 PidTagResponseRequested

Canonical name: PidTagResponseRequested

Description: Indicates whether a response is requested to a Message object.

Property ID: 0x0063

Data type: PtypBoolean, 0x000B

Area: MapiEnvelope Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_RESPONSE_REQUESTED, urn:schemas:calendar:responserequested, http://schemas.microsoft.com/mapi/response_requested

2.1037 PidTagResponsibility

Canonical name: PidTagResponsibility

Property ID: 0x0E0F

Data type: PtypBoolean, 0x000B

Area: MapiNonTransmittable

References: [\[MS-OXCFXICS\]](#)

Alternate names: PR_RESPONSIBILITY, ptagResponsibility

2.1038 PidTagRetentionDate

Canonical name: PidTagRetentionDate

Description: Specifies the date, in UTC, after which a Message object is expired by the server.

Property ID: 0x301C

Data type: PtypTime, 0x0040

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_RETENTION_DATE, ptagRetentionDate

2.1039 PidTagRetentionFlags

Canonical name: PidTagRetentionFlags

Property ID: 0x301D

Data type: PtypInteger32, 0x0003

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_RETENTION_FLAGS, ptagRetentionFlags

2.1040 PidTagRetentionPeriod

Canonical name: PidTagRetentionPeriod

Property ID: 0x301A

Data type: PtypInteger32, 0x0003

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_RETENTION_PERIOD, ptagRetentionPeriod

2.1041 PidTagRights

Canonical name: PidTagRights

Description: Specifies a user's folder permissions.

Property ID: 0x6639

Data type: PtypInteger32, 0x0003

Area: ExchangeFolder

References: [\[MS-OXCFOLD\]](#)

Alternate names: PR_RIGHTS, ptagRights

2.1042 PidTagRoamingDatatypes

Canonical name: PidTagRoamingDatatypes

Property ID: 0x7C06

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_ROAMING_DATATYPES

2.1043 PidTagRoamingDictionary

Canonical name: PidTagRoamingDictionary

Property ID: 0x7C07

Data type: PtypBinary, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_ROAMING_DICTIONARY

2.1044 PidTagRoamingXmlStream

Canonical name: PidTagRoamingXmlStream

Property ID: 0x7C08

Data type: PtypBinary, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_ROAMING_XMLSTREAM

2.1045 PidTagRowid

Canonical name: PidTagRowid

Property ID: 0x3000

Data type: PtypInteger32, 0x0003

Area: MapiCommon

References: [\[MS-OXCFXICS\]](#)

Alternate names: PR_ROWID, ptagRowId

2.1046 PidTagRowType

Canonical name: PidTagRowType

Description: Identifies the type of the row.

Property ID: 0x0FF5

Data type: PtypInteger32, 0x0003

Area: MapiNonTransmittable

References: [\[MS-OXCTABL\]](#)

Alternate names: PR_ROW_TYPE, ptagRowType

2.1047 PidTagRtfCompressed

Canonical name: PidTagRtfCompressed

Description: Contains message body text in **RTF** format.

Property ID: 0x1009

Data type: PtypBinary, 0x0102

Area: Email

References: [\[MS-OXBBODY\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXRTFCP\]](#), [\[MS-OXRTFEX\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_COMPRESSED, ptagRTFCompressed

2.1048 PidTagRtfInSync

Canonical name: PidTagRtfInSync

Description: Indicates whether the [PidTagBody](#) (section [2.685](#)) and [PidTagRtfCompressed](#) (section [2.1047](#)) properties contain the same text (ignoring formatting).

Property ID: 0x0E1F

Data type: PtypBoolean, 0x000B

Area: Email

References: [\[MS-OXBBODY\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORMMS\]](#), [\[MS-OXRTFEX\]](#)

Alternate names: PR_RTF_IN_SYNC, ptagRTFInSync

2.1049 PidTagRtfSyncBodyCount

Canonical name: PidTagRtfSyncBodyCount

Property ID: 0x1007

Data type: PtypInteger32, 0x0003

Area: MapiMessage

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_SYNC_BODY_COUNT, ptagRTFSyncBodyCount

2.1050 PidTagRtfSyncBodyCrc

Canonical name: PidTagRtfSyncBodyCrc

Property ID: 0x1006

Data type: PtypInteger32, 0x0003

Area: MapiMessage

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_SYNC_BODY_CRC, ptagRTFSyncBodyCRC

2.1051 PidTagRtfSyncBodyTag

Canonical name: PidTagRtfSyncBodyTag

Property ID: 0x1008

Data type: PtypString, 0x001F

Area: MapiMessage

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_SYNC_BODY_TAG, PR_RTF_SYNC_BODY_TAG_A, ptagRTFSyncBodyTag, PR_RTF_SYNC_BODY_TAG_W

2.1052 PidTagRtfSyncPrefixCount

Canonical name: PidTagRtfSyncPrefixCount

Property ID: 0x1010

Data type: PtypInteger32, 0x0003

Area: MapiMessage

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_SYNC_PREFIX_COUNT

2.1053 PidTagRtfSyncTrailingCount

Canonical name: PidTagRtfSyncTrailingCount

Property ID: 0x1011

Data type: PtypInteger32, 0x0003

Area: MapiMessage

References: [\[MS-OXTNEF\]](#)

Alternate names: PR_RTF_SYNC_TRAILING_COUNT

2.1054 PidTagRuleActionNumber

Canonical name: PidTagRuleActionNumber

Property ID: 0x6650

Data type: PtypInteger32, 0x0003

Area: ExchangeMessageReadOnly

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_ACTION_NUMBER, ptagRuleActionNumber

2.1055 PidTagRuleActions

Canonical name: PidTagRuleActions

Property ID: 0x6680

Data type: PtypRuleAction, 0x00FE

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_ACTIONS, ptagRuleActions

2.1056 PidTagRuleActionType

Canonical name: PidTagRuleActionType

Property ID: 0x6649

Data type: PtypInteger32, 0x0003

Area: ExchangeMessageReadOnly

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_ACTION_TYPE, ptagRuleActionType

2.1057 PidTagRuleCondition

Canonical name: PidTagRuleCondition

Property ID: 0x6679

Data type: PtypRestriction, 0x00FD

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_CONDITION, ptagRuleCondition

2.1058 PidTagRuleError

Canonical name: PidTagRuleError

Property ID: 0x6648

Data type: PtypInteger32, 0x0003

Area: ExchangeMessageReadOnly

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_ERROR, ptagRuleError

2.1059 PidTagRuleFolderEntryId

Canonical name: PidTagRuleFolderEntryId

Property ID: 0x6651

Data type: PtypBinary, 0x0102

Area: ExchangeMessageReadOnly

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_FOLDER_ENTRYID, ptagRuleFolderEntryId

2.1060 PidTagRuleId

Canonical name: PidTagRuleId

Property ID: 0x6674

Data type: PtypInteger64, 0x0014

Area: Server-Side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_ID, ptagRuleId

2.1061 PidTagRuleIds

Canonical name: PidTagRuleIds

Description: Contains a buffer obtained by concatenating the [PidTagRuleId](#) (section [2.1060](#)) values from all rules contributing actions that are contained in the [PidTagClientActions](#) (section [2.702](#)) property.

Property ID: 0x6675

Data type: PtypBinary, 0x0102

Area: Server-Side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_IDS, ptagRuleIds

2.1062 PidTagRuleLevel

Canonical name: PidTagRuleLevel

Property ID: 0x6683

Data type: PtypInteger32, 0x0003

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_LEVEL, ptagRuleLevel

2.1063 PidTagRuleMessageLevel

Canonical name: PidTagRuleMessageLevel

Property ID: 0x65ED

Data type: PtypInteger32, 0x0003

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_MSG_LEVEL, ptagRuleMsgLevel

2.1064 PidTagRuleMessageName

Canonical name: PidTagRuleMessageName

Property ID: 0x65EC

Data type: PtypString, 0x001F

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: ptagRuleMsgName

2.1065 PidTagRuleMessageProvider

Canonical name: PidTagRuleMessageProvider

Property ID: 0x65EB

Data type: PtypString, 0x001F

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: ptagRuleMsgProvider

2.1066 PidTagRuleMessageProviderData

Canonical name: PidTagRuleMessageProviderData

Property ID: 0x65EE

Data type: PtypBinary, 0x0102

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_MSG_PROVIDER_DATA, ptagRuleMsgProviderData

2.1067 PidTagRuleMessageSequence

Canonical name: PidTagRuleMessageSequence

Property ID: 0x65F3

Data type: PtypInteger32, 0x0003

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_MSG_SEQUENCE, ptagRuleMsgSequence

2.1068 PidTagRuleMessageState

Canonical name: PidTagRuleMessageState

Property ID: 0x65E9

Data type: PtypInteger32, 0x0003

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_MSG_STATE, ptagRuleMsgState

2.1069 PidTagRuleMessageUserFlags

Canonical name: PidTagRuleMessageUserFlags

Property ID: 0x65EA

Data type: PtypInteger32, 0x0003

Area: ExchangeNonTransmittableReserved

References: [\[MS-OXCSPAM\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_MSG_USER_FLAGS, ptagRuleMsgUserFlags

2.1070 PidTagRuleName

Canonical name: PidTagRuleName

Property ID: 0x6682

Data type: PtypString, 0x001F

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_NAME, PR_RULE_NAME_A, ptagRuleName, PR_RULE_NAME_W

2.1071 PidTagRuleProvider

Canonical name: PidTagRuleProvider

Property ID: 0x6681

Data type: PtypString, 0x001F

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_PROVIDER, ptagRuleProvider, PR_RULE_PROVIDER_W

2.1072 PidTagRuleProviderData

Canonical name: PidTagRuleProviderData

Property ID: 0x6684

Data type: PtypBinary, 0x0102

Area: Server-Side Rules Properties

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_PROVIDER_DATA, ptagRuleProviderData

2.1073 PidTagRuleSequence

Canonical name: PidTagRuleSequence

Property ID: 0x6676

Data type: PtypInteger32, 0x0003

Area: Server-Side Rules Properties

References: [\[MS-OXCPRPT\]](#), [\[MS-OXCSTOR\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXPROTO\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_SEQUENCE, ptagRuleSequence

2.1074 PidTagRuleState

Canonical name: PidTagRuleState

Property ID: 0x6677

Data type: PtypInteger32, 0x0003

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_STATE, ptagRuleState

2.1075 PidTagRuleUserFlags

Canonical name: PidTagRuleUserFlags

Property ID: 0x6678

Data type: PtypInteger32, 0x0003

Area: Server-Side Rules Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXORULE\]](#)

Alternate names: PR_RULE_USER_FLAGS, ptagRuleUserFlags

2.1076 PidTagRwRulesStream

Canonical name: PidTagRwRulesStream

Property ID: 0x6802

Data type: PtypBinary, 0x0102

Area: Message Class Defined Transmittable

References: [\[MS-OXORULE\]](#)

Alternate names: PR_RW_RULES_STREAM

2.1077 PidTagScheduleInfoAppointmentTombstone

Canonical name: PidTagScheduleInfoAppointmentTombstone

Description: Contains a list of tombstones, where each tombstone represents a Meeting object that has been declined.

Property ID: 0x686A

Data type: PtypBinary, 0x0102

Area: Free/Busy Properties

References: [\[MS-OXOCAL\]](#)

Alternate names: PR_SCHDINFO_APPT_TOMBSTONE

2.1078 PidTagScheduleInfoAutoAcceptAppointments

Canonical name: PidTagScheduleInfoAutoAcceptAppointments

Description: Indicates whether a client or server is to automatically respond to all meeting requests for the attendee or resource.

Property ID: 0x686D

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXOCAL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_AUTO_ACCEPT_APPTS

2.1079 PidTagScheduleInfoDelegateEntryIds

Canonical name: PidTagScheduleInfoDelegateEntryIds

Property ID: 0x6845

Data type: PtypMultipleBinary, 0x1102

Area: Free/Busy Properties

References: [\[MS-OXODLGT\]](#)

Alternate names: PR_SCHDINFO_DELEGATE_ENTRYIDS

2.1080 PidTagScheduleInfoDelegateNames

Canonical name: PidTagScheduleInfoDelegateNames

Property ID: 0x6844

Data type: PtypMultipleString, 0x101F

Area: Free/Busy Properties

References: [\[MS-OXMSG\]](#), [\[MS-OXODLGT\]](#)

Alternate names: PR_SCHDINFO_DELEGATE_NAMES

2.1081 PidTagScheduleInfoDelegateNamesW

Canonical name: PidTagScheduleInfoDelegateNamesW

Property ID: 0x684A

Data type: PtypMultipleString, 0x101F

Area: Free/Busy Properties

References: [\[MS-OXODLGT\]](#)

Alternate names: PR_SCHDINFO_DELEGATE_NAMES_W, ptagDelegateNames

2.1082 PidTagScheduleInfoDelegatorWantsCopy

Canonical name: PidTagScheduleInfoDelegatorWantsCopy

Property ID: 0x6842

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_BOSS_WANTS_COPY

2.1083 PidTagScheduleInfoDelegatorWantsInfo

Canonical name: PidTagScheduleInfoDelegatorWantsInfo

Property ID: 0x684B

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXOCAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_BOSS_WANTS_INFO

2.1084 PidTagScheduleInfoDisallowOverlappingAppts

Canonical name: PidTagScheduleInfoDisallowOverlappingAppts

Description: Indicates whether a client or server, when automatically responding to meeting requests, is to decline instances that overlap with previously scheduled events.

Property ID: 0x686F

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXOCAL\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_DISALLOW_OVERLAPPING_APPTS

2.1085 PidTagScheduleInfoDisallowRecurringAppts

Canonical name: PidTagScheduleInfoDisallowRecurringAppts

Description: Indicates whether a client or server, when automatically responding to meeting requests, is to decline Meeting Request objects that represent a recurring series.

Property ID: 0x686E

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXODLGT\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_DISALLOW_RECURRING_APPTS

2.1086 PidTagScheduleInfoDontMailDelegates

Canonical name: PidTagScheduleInfoDontMailDelegates

Property ID: 0x6843

Data type: PtypBoolean, 0x000B

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_DONT_MAIL_DELEGATES

2.1087 PidTagScheduleInfoFreeBusy

Canonical name: PidTagScheduleInfoFreeBusy

Property ID: 0x686C

Data type: PtypBinary, 0x0102

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_FREEBUSY

2.1088 PidTagScheduleInfoFreeBusyAway

Canonical name: PidTagScheduleInfoFreeBusyAway

Property ID: 0x6856

Data type: PtypMultipleBinary, 0x1102

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_FREEBUSY_OOF

2.1089 PidTagScheduleInfoFreeBusyBusy

Canonical name: PidTagScheduleInfoFreeBusyBusy

Property ID: 0x6854

Data type: PtypMultipleBinary, 0x1102

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_FREEBUSY_BUSY

2.1090 PidTagScheduleInfoFreeBusyMerged

Canonical name: PidTagScheduleInfoFreeBusyMerged

Property ID: 0x6850

Data type: PtypMultipleBinary, 0x1102

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_FREEBUSY_MERGED

2.1091 PidTagScheduleInfoFreeBusyTentative

Canonical name: PidTagScheduleInfoFreeBusyTentative

Property ID: 0x6852

Data type: **PtypMultipleBinary**, 0x1102

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_FREEBUSY_TENTATIVE

2.1092 PidTagScheduleInfoMonthsAway

Canonical name: PidTagScheduleInfoMonthsAway

Property ID: 0x6855

Data type: **PtypMultipleInteger32**, 0x1003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_MONTHS_OOF

2.1093 PidTagScheduleInfoMonthsBusy

Canonical name: PidTagScheduleInfoMonthsBusy

Property ID: 0x6853

Data type: **PtypMultipleInteger32**, 0x1003

Area: Free/Busy Properties

References: [\[MS-OXMSG\]](#), [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_MONTHS_BUSY

2.1094 PidTagScheduleInfoMonthsMerged

Canonical name: PidTagScheduleInfoMonthsMerged

Property ID: 0x684F

Data type: **PtypMultipleInteger32**, 0x1003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_MONTHS_MERGED

2.1095 PidTagScheduleInfoMonthsTentative

Canonical name: PidTagScheduleInfoMonthsTentative

Property ID: 0x6851

Data type: PtypMultipleInteger32, 0x1003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_MONTHS_TENTATIVE

2.1096 PidTagScheduleInfoResourceType

Canonical name: PidTagScheduleInfoResourceType

Property ID: 0x6841

Data type: PtypInteger32, 0x0003

Area: Free/Busy Properties

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SCHDINFO_RESOURCE_TYPE

2.1097 PidTagSchedulePlusFreeBusyEntryId

Canonical name: PidTagSchedulePlusFreeBusyEntryId

Property ID: 0x6622

Data type: PtypBinary, 0x0102

Area: ExchangeMessageStore

References: [\[MS-OXOPFFB\]](#)

Alternate names: PR_SPLUS_FREE_BUSY_ENTRYID

2.1098 PidTagScriptData

Canonical name: PidTagScriptData

Property ID: 0x0004

Data type: PtypBinary, 0x0102

Area: Address Book

References: [\[MS-OXOABKT\]](#)

Alternate names: PR_EMS_SCRIPT_BLOB

2.1099 PidTagSearchFolderDefinition

Canonical name: PidTagSearchFolderDefinition

Property ID: 0x6845

Data type: PtypBinary, 0x0102

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_DEFINITION

2.1100 PidTagSearchFolderEfpFlags

Canonical name: PidTagSearchFolderEfpFlags

Property ID: 0x6848

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_EFP_FLAGS

2.1101 PidTagSearchFolderExpiration

Canonical name: PidTagSearchFolderExpiration

Property ID: 0x683A

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_EXPIRATION

2.1102 PidTagSearchFolderId

Canonical name: PidTagSearchFolderId

Property ID: 0x6842

Data type: PtypBinary, 0x0102

Area: Search

References: [\[MS-OXOCFG\]](#), [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_ID

2.1103 PidTagSearchFolderLastUsed

Canonical name: PidTagSearchFolderLastUsed

Property ID: 0x6834

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_LAST_USED

2.1104 PidTagSearchFolderRecreateInfo

Canonical name: PidTagSearchFolderRecreateInfo

Property ID: 0x6844

Data type: PtypBinary, 0x0102

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_RECREATE_INFO

2.1105 PidTagSearchFolderStorageType

Canonical name: PidTagSearchFolderStorageType

Property ID: 0x6846

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_STORAGE_TYPE

2.1106 PidTagSearchFolderTag

Canonical name: PidTagSearchFolderTag

Property ID: 0x6847

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_TAG

2.1107 PidTagSearchFolderTemplateId

Canonical name: PidTagSearchFolderTemplateId

Property ID: 0x6841

Data type: PtypInteger32, 0x0003

Area: Search

References: [\[MS-OXOSRCH\]](#)

Alternate names: PR_WB_SF_TEMPLATE_ID

2.1108 PidTagSearchKey

Canonical name: PidTagSearchKey

Description: Contains a unique binary-comparable key that identifies an object for a search.

Property ID: 0x300B

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCFOLD\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOJRNL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORULE\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SEARCH_KEY, ptagSearchKey

2.1109 PidTagSecureSubmitFlags

Canonical name: PidTagSecureSubmitFlags

Property ID: 0x65C6

Data type: PtypInteger32, 0x0003

Area: Exchange

References: [\[MS-OXCFXICS\]](#)

Alternate names: PR_SECURE_SUBMIT_FLAGS, ptagSecureSubmitFlags

2.1110 PidTagSecurityDescriptor

Canonical name: PidTagSecurityDescriptor

Property ID: 0x0E27

Data type: PtypBinary, 0x0102

Area: Access Control Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXCPRM\]](#), [\[MS-XWDVSEC\]](#)

Alternate names: PR_NT_SECURITY_DESCRIPTOR

2.1111 PidTagSecurityDescriptorAsXml

Canonical name: PidTagSecurityDescriptorAsXml

Property ID: 0x0E6A

Data type: PtypString, 0x001F

Area: Access Control Properties Property set

References: [\[MS-OXCPERM\]](#), [\[MS-XWDVSEC\]](#)

Alternate names: PR_NT_SECURITY_DESCRIPTOR_AS_XML, PR_NT_SECURITY_DESCRIPTOR_AS_XML_A, PR_NT_SECURITY_DESCRIPTOR_AS_XML_W, <http://schemas.microsoft.com/exchange/security/descriptor>

2.1112 PidTagSelectable

Canonical name: PidTagSelectable

Property ID: 0x3609

Data type: PtypBoolean, 0x000B

Area: AB Container

References: [\[MS-OXOABKT\]](#)

Alternate names: PR_SELECTABLE

2.1113 PidTagSenderAddressType

Canonical name: PidTagSenderAddressType

Description: Contains the sending mailbox owner's e-mail address type.

Property ID: 0x0C1E

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXOPOST\]](#)

Alternate names: PR_SENDER_ADDRTYPE, PR_SENDER_ADDRTYPE_A, ptagSenderAddrType, PR_SENDER_ADDRTYPE_W

2.1114 PidTagSenderEmailAddress

Canonical name: PidTagSenderEmailAddress

Description: Contains the contents of the <email> element of the <author> element in an Atom item if it exists.

Property ID: 0x0C1F

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXPSVAL\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SENDER_EMAIL_ADDRESS, PR_SENDER_EMAIL_ADDRESS_A, PR_SENDER_EMAIL_ADDRESS_W

2.1115 PidTagSenderEntryId

Canonical name: PidTagSenderEntryId

Description: Identifies an address book EntryID that contains the sending mailbox owner's address book EntryID.

Property ID: 0x0C19

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SENDER_ENTRYID, ptagSenderEntryId

2.1116 PidTagSenderFlags

Canonical name: PidTagSenderFlags

Property ID: 0x4019

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: ptagSenderFlags

2.1117 PidTagSenderIdStatus

Canonical name: PidTagSenderIdStatus

Description: Reports the results of a Sender-ID check.

Property ID: 0x4079

Data type: PtypInteger32, 0x0003

Area: Secure Messaging Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXCSPAM\]](#)

Alternate names: PR_SENDER_ID_STATUS

2.1118 PidTagSenderName

Canonical name: PidTagSenderName

Description: Contains the sending mailbox owner's display name

Property ID: 0x0C1A

Data type: PtypString, 0x001F

Area: Address Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXCSYNC\]](#), [\[MS-OXORSS\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_SENDER_NAME, PR_SENDER_NAME_A, ptagSenderName, PR_SENDER_NAME_W, urn:schemas:httpmail:sendername, http://schemas.microsoft.com/exchange/sender-name-utf8

2.1119 PidTagSenderSearchKey

Canonical name: PidTagSenderSearchKey

Description: Identifies an address book search key.

Property ID: 0x0C1D

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#)

Alternate names: PR_SENDER_SEARCH_KEY, ptagSenderSearchKey

2.1120 PidTagSenderSimpleDisplayName

Canonical name: PidTagSenderSimpleDisplayName

Property ID: 0x4030

Data type: PtypString, 0x001F

Area: TransportEnvelope

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagSenderSimpleDispName

2.1121 PidTagSenderSmtpAddress

Canonical name: PidTagSenderSmtpAddress

Property ID: 0x5D01

Data type: PtypString, 0x001F

Area: Mail

References: [\[MS-OXCMAIL\]](#)

Alternate names: SenderSmtpAddress, ptagSenderSmtpAddress

2.1122 PidTagSenderTelephoneNumber

Canonical name: PidTagSenderTelephoneNumber

Property ID: 0x6802

Data type: **PtypString**, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: InternalSchemaSenderTelephoneNumber

2.1123 PidTagSendInternetEncoding

Canonical name: PidTagSendInternetEncoding

Description: Contains a bitmask of message encoding preferences for e-mail sent to an e-mail-enabled entity that is represented by this Address Book object.

Property ID: 0x3A71

Data type: **PtypInteger32**, 0x0003

Area: Address Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_SEND_INTERNET_ENCODING, ptagSendInternetEncoding

2.1124 PidTagSendRichInfo

Canonical name: PidTagSendRichInfo

Description: Contains TRUE if the e-mail-enabled entity represented by the Address Book object can receive all message content, including Rich Text Format (RTF) and other embedded objects.

Property ID: 0x3A40

Data type: **PtypBoolean**, 0x000B

Area: Address Properties

References: [\[MS-OXOAB\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_SEND_RICH_INFO, ptagSendRichInfo

2.1125 PidTagSensitivity

Canonical name: PidTagSensitivity

Description: Indicates the sender's assessment of the sensitivity of the Message object.

Property ID: 0x0036

Data type: **PtypInteger32**, 0x0003

Area: General Message Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXODOC\]](#), [\[MS-OXVCARD\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDMail\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_SENSITIVITY, ptagSensitivity, <http://schemas.microsoft.com/exchange/sensitivity-long>, <http://schemas.microsoft.com/exchange/sensitivity>

2.1126 PidTagSentMailSvrEID

Canonical name: PidTagSentMailSvrEID

Description: Contains an EntryID that represents the **Sent Items folder** for the message.

Property ID: 0x6740

Data type: **PtypServerId**, 0x00FB

Area: ProviderDefinedNonTransmittable

References: [\[MS-OXCSTOR\]](#), [\[MS-OXOMSG\]](#)

Alternate names: ptagSentMailSvrEID

2.1127 PidTagSentRepresentingAddressType

Canonical name: PidTagSentRepresentingAddressType

Description: Contains an e-mail address type.

Property ID: 0x0064

Data type: **PtypString**, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SENT_REPRESENTING_ADDRTYPE, PR_SENT_REPRESENTING_ADDRTYPE_A, ptagSentRepresentingAddrType, PR_SENT_REPRESENTING_ADDRTYPE_W

2.1128 PidTagSentRepresentingEmailAddress

Canonical name: PidTagSentRepresentingEmailAddress

Description: Contains the contents of the <email> element of the <author> element in an Atom item, if it exists.

Property ID: 0x0065

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SENT_REPRESENTING_EMAIL_ADDRESS, PR_SENT_REPRESENTING_EMAIL_ADDRESS_A, PR_SENT_REPRESENTING_EMAIL_ADDRESS_W

2.1129 PidTagSentRepresentingEntryId

Canonical name: PidTagSentRepresentingEntryId

Description: Identifies an address book EntryID.

Property ID: 0x0041

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCADATA\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SENT_REPRESENTING_ENTRYID, ptagSentRepresentingEntryId

2.1130 PidTagSentRepresentingFlags

Canonical name: PidTagSentRepresentingFlags

Property ID: 0x401A

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXTNEF\]](#)

Alternate names: ptagSentRepresentingFlags

2.1131 PidTagSentRepresentingName

Canonical name: PidTagSentRepresentingName

Description: Contains the display name for the end user who is represented by the sending mailbox owner.

Property ID: 0x0042

Data type: PtypString, 0x001F

Area: Address Properties Property set

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOTASK\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_SENT_REPRESENTING_NAME, PR_SENT_REPRESENTING_NAME_A, ptagSentRepresentingName, PR_SENT_REPRESENTING_NAME_W, urn:schemas:httpmail:fromname, http://schemas.microsoft.com/exchange/from-name-utf8

2.1132 PidTagSentRepresentingSearchKey

Canonical name: PidTagSentRepresentingSearchKey

Description: Identifies an address book search key.

Property ID: 0x003B

Data type: PtypBinary, 0x0102

Area: Address Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXOTASK\]](#)

Alternate names: PR_SENT_REPRESENTING_SEARCH_KEY, ptagSentRepresentingSearchKey

2.1133 PidTagSentRepresentingSimpleDisplayName

Canonical name: PidTagSentRepresentingSimpleDisplayName

Property ID: 0x4031

Data type: PtypString, 0x001F

Area: TransportEnvelope

References: [\[MS-OXTNEF\]](#)

Alternate names: ptagSentRepresentingSimpleDispName

2.1134 PidTagSessionInitiationProtocolUri

Canonical name: PidTagSessionInitiationProtocolUri

Property ID: 0x5FE5

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagRecipientSipUri, SipUri

2.1135 PidTagSmtipAddress

Canonical name: PidTagSmtipAddress

Description: Contains the Address Book object's SMTP address.

Property ID: 0x39FE

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#), [\[MS-NSPI\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXSHARE\]](#)

Alternate names: PR_SMTP_ADDRESS, PR_SMTP_ADDRESS_A, PR_SMTP_ADDRESS_W

2.1136 PidTagSortLocaleId

Canonical name: PidTagSortLocaleId

Property ID: 0x6705

Data type: PtypInteger32, 0x0003

Area: ExchangeAdministrative

References: [\[MS-OXCSTOR\]](#), [\[MS-OXPFOAB\]](#)

Alternate names: PR_SORT_LOCALE_ID, ptagSortLocaleId

2.1137 PidTagSourceKey

Canonical name: PidTagSourceKey

Description: Contains a value that contains an internal global identifier (GID) for this folder or message.

Property ID: 0x65E0

Data type: PtypBinary, 0x0102

Area: Sync

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCSYNC\]](#)

Alternate names: PR_SOURCE_KEY

2.1138 PidTagSpokenName

Canonical name: PidTagSpokenName

Property ID: 0x8CC2

Data type: PtypBinary, 0x0102

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_UM_SPOKEN_NAME

2.1139 PidTagSpouseName

Canonical name: PidTagSpouseName

Description: Contains the name of the mail user's spouse/partner.

Property ID: 0x3A48

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_SPOUSE_NAME, PR_SPOUSE_NAME_A, PR_SPOUSE_NAME_W,
urn:schemas:contacts:spousecn

2.1140 PidTagStartDate

Canonical name: PidTagStartDate

Description: Contains the value of the [PidLidAppointmentStartWhole](#) property (section [2.29](#)).

Property ID: 0x0060

Data type: **PtypTime**, 0x0040

Area: MapiEnvelope Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDCAL\]](#)

Alternate names: PR_START_DATE, http://schemas.microsoft.com/mapi/start_date

2.1141 PidTagStartDateEtc

Canonical name: PidTagStartDateEtc

Description: Contains two pieces of information: the default retention period, and the start date from which the Message object's age is calculated.

Property ID: 0x301B

Data type: **PtypBinary**, 0x0102

Area: Archive

References: [MS-OXCMSG](#)

Alternate names: PR_START_DATE_ETC, ptagStartDateEtc

2.1142 PidTagStartEmbed

Canonical name: PidTagStartEmbed

Property ID: 0x4001

Data type: **PtypInteger32**, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartEmbed

2.1143 PidTagStartFAIMsg

Canonical name: PidTagStartFAIMsg

Property ID: 0x4010

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartFAIMsg

2.1144 PidTagStartMessage

Canonical name: PidTagStartMessage

Property ID: 0x400C

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartMessage

2.1145 PidTagStartRecip

Canonical name: PidTagStartRecip

Property ID: 0x4003

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartRecip

2.1146 PidTagStartSubFld

Canonical name: PidTagStartSubFld

Property ID: 0x400A

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartSubFld

2.1147 PidTagStartTopFld

Canonical name: PidTagStartTopFld

Property ID: 0x4009

Data type: PtypInteger32, 0x0003

Area: TransportEnvelope

References: [\[MS-OXCFXICS\]](#)

Alternate names: ptagStartTopFld

2.1148 PidTagStateOrProvince

Canonical name: PidTagStateOrProvince

Description: Contains the name of the mail user's state or province.

Property ID: 0x3A28

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_STATE_OR_PROVINCE, PR_STATE_OR_PROVINCE_A, PR_STATE_OR_PROVINCE_W, PR_BUSINESS_ADDRESS_STATE_OR_PROVINCE, PR_BUSINESS_ADDRESS_STATE_OR_PROVINCE_A, PR_BUSINESS_ADDRESS_STATE_OR_PROVINCE_W, urn:schemas:contacts:mailingstate

2.1149 PidTagStoreEntryId

Canonical name: PidTagStoreEntryId

Property ID: 0x0FFB

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-OXOFLAG\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXOCFG\]](#)

Alternate names: PR_STORE_ENTRYID, ptagStoreEntryId

2.1150 PidTagStoreState

Canonical name: PidTagStoreState

Property ID: 0x340E

Data type: PtypInteger32, 0x0003

Area: MapiMessageStore

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_STORE_STATE

2.1151 PidTagStoreSupportMask

Canonical name: PidTagStoreSupportMask

Property ID: 0x340D

Data type: **PtypInteger32**, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXOMSG\]](#)

Alternate names: PR_STORE_SUPPORT_MASK, ptagStoreSupportMask

2.1152 PidTagStreetAddress

Canonical name: PidTagStreetAddress

Description: Contains the mail user's street address.

Property ID: 0x3A29

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_STREET_ADDRESS, PR_STREET_ADDRESS_A, PR_STREET_ADDRESS_W, PR_BUSINESS_ADDRESS_STREET, PR_BUSINESS_ADDRESS_STREET_A, PR_BUSINESS_ADDRESS_STREET_W, urn:schemas:contacts:mailingstreet

2.1153 PidTagSubfolder

Canonical name: PidTagSubfolder

Property ID: 0x6708

Data type: **PtypBoolean**, 0x000B

Area: ExchangeAdministrative Property set

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCICAL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDFOLD\]](#)

Alternate names: PR_SUBFOLDER, ptagSubfolder, DAV:isfolder

2.1154 PidTagSubfolders

Canonical name: PidTagSubfolders

Description: Specifies whether a folder has any subfolders.

Property ID: 0x360A

Data type: PtypBoolean, 0x000B

Area: MapiContainer

References: [\[MS-OXCFOLD\]](#), [\[MS-OXCICAL\]](#), [\[MS-XWDFOLD\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_SUBFOLDERS, ptagSubFolders, DAV:hassubs

2.1155 PidTagSubject

Canonical name: PidTagSubject

Property ID: 0x0037

Data type: PtypSdtring, 0x001F

Area: General Message Properties Property set

References: [\[MS-OXCICAL\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXTNEF\]](#), [\[MS-OXCADATA\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCSPAM\]](#), [\[MS-OXCTABL\]](#), [\[MS-OXMSG\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCFG\]](#), [\[MS-OXOJRN\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXORULE\]](#), [\[MS-OXPROTO\]](#), [\[MS-OXPSVAL\]](#), [\[MS-OXWAVLS\]](#), [\[MS-XWDMAIL\]](#), [\[MS-XWDCAL\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_SUBJECT, PR_SUBJECT_A, ptagSubject, PR_SUBJECT_W, urn:schemas:httpmail:subject, http://schemas.microsoft.com/exchange/subject-utf8

2.1156 PidTagSubjectPrefix

Canonical name: PidTagSubjectPrefix

Description: Contains the prefix for the subject of the message.

Property ID: 0x003D

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCICAL\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXCPRPT\]](#), [\[MS-OXOCAL\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXODLGT\]](#), [\[MS-OXOMSG\]](#), [\[MS-OXONOTE\]](#), [\[MS-OXOPFFB\]](#), [\[MS-OXOPOST\]](#), [\[MS-OXORSS\]](#), [\[MS-OXOSMMS\]](#), [\[MS-OXSHARE\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_SUBJECT_PREFIX, PR_SUBJECT_PREFIX_A, ptagSubjectPrefix, PR_SUBJECT_PREFIX_W

2.1157 PidTagSurname

Canonical name: PidTagSurname

Description: Contains the mail user's family name.

Property ID: 0x3A11

Data type: PtypString, 0x001F

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_SURNAME, PR_SURNAME_A, PR_SURNAME_W, urn:schemas:contacts:sn

2.1158 PidTagSwappedToDoData

Canonical name: PidTagSwappedToDoData

Description: Contains a secondary flag **storage** location if sender flags or sender reminders are supported.

Property ID: 0x0E2D

Data type: PtypBinary, 0x0102

Area: MapiNonTransmittable

References: [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#)

Alternate names: PR_SWAPPED_TODO_DATA, ptagSwappedToDoData

2.1159 PidTagSwappedToDoStore

Canonical name: PidTagSwappedToDoStore

Description: Contains the value of [PidTagStoreEntryId](#) (section [2.1149](#)) of the message if [PidTagSwappedToDoData](#) (section [2.1158](#)) is set.

Property ID: 0x0E2C

Data type: PtypBinary, 0x0102

Area: MapiNonTransmittable

References: [\[MS-OXOFLAG\]](#), [\[MS-OXORMDR\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_SWAPPED_TODO_STORE, ptagSwappedToDoStore

2.1160 PidTagTargetEntryId

Canonical name: PidTagTargetEntryId

Description: Used in conjunction with an optimizing send client.

Property ID: 0x3010

Data type: PtypBinary, 0x0102

Area: ID Properties

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCRPC\]](#), [\[MS-OXCSYNC\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_TARGET_ENTRYID, ptagTargetEntryId

2.1161 PidTagTcvConstLongOne

Canonical name: PidTagTcvConstLongOne

Property ID: 0x8008

Data type: **PtypInteger32**, 0x0003

Area: PST Internal

References: [\[MS-OXCTABL\]](#)

Alternate names: PR_TCV_CONST_LONG_ONE

2.1162 PidTagTelecommunicationsDeviceForDeafTelephoneNumber

Canonical name: PidTagTelecommunicationsDeviceForDeafTelephoneNumber

Description: Contains the mail user's telecommunication device for the deaf (TTY/TDD) telephone number.

Property ID: 0x3A4B

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-EXOABK\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_TTYTDD_PHONE_NUMBER, PR_TTYTDD_PHONE_NUMBER_A, PR_TTYTDD_PHONE_NUMBER_W, urn:schemas:contacts:tytddphone

2.1163 PidTagTelexNumber

Canonical name: PidTagTelexNumber

Description: Contains the mail user's telex number.

Property ID: 0x3A2C

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_TELEX_NUMBER, PR_TELEX_NUMBER_A, PR_TELEX_NUMBER_W, urn:schemas:contacts:telexnumber

2.1164 PidTagTemplateData

Canonical name: PidTagTemplateData

Property ID: 0x0001

Data type: **PtypBinary**, 0x0102

Area: Address Book

References: [\[MS-OXOABKT\]](#)

Alternate names: PR_EMS_TEMPLATE_BLOB

2.1165 PidTagTemplateid

Canonical name: PidTagTemplateid

Description: Contains the [PidTagEntryId](#) (section [2.761](#)), expressed as a **Permanent Entry ID** format.

Property ID: 0x3902

Data type: PtypBinary, 0x0102

Area: MapiAddressBook

References: [\[MS-NSPI\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_TEMPLATEID

2.1166 PidTagTemporaryDefaultDocument

Canonical name: PidTagTemporaryDefaultDocument

Property ID: 0x3F20

Data type: PtypString, 0x001F

Area: Structured Documents Property set

References: [\[MS-XWDSTRUCTDOC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: DAV:defaultdocument

2.1167 PidTagTextAttachmentCharset

Canonical name: PidTagTextAttachmentCharset

Property ID: 0x371B

Data type: PtypString, 0x001F

Area: Message Attachment Properties

References: [\[MS-OXCMAIL\]](#)

Alternate names: ptagTextAttachmentCharset

2.1168 PidTagThumbnailPhoto

Canonical name: PidTagThumbnailPhoto

Description: Contain an image of the mail user's photo in **.jpg** format.

Property ID: 0x8C9E

Data type: PtypBinary, 0x0102

Area: Address Book

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_EMS_AB_THUMBNAIL_PHOTO

2.1169 PidTagTitle

Canonical name: PidTagTitle

Description: Contains the mail user's job title.

Property ID: 0x3A17

Data type: **PtypString**, 0x001F

Area: MapiMailUser

References: [\[MS-NSPI\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_TITLE, PR_TITLE_A, PR_TITLE_W, urn:schemas:contacts:title

2.1170 PidTagTnefCorrelationKey

Canonical name: PidTagTnefCorrelationKey

Property ID: 0x007F

Data type: **PtypBinary**, 0x0102

Area: MapiEnvelope

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXTNEF\]](#)

Alternate names: PR_TNEF_CORRELATION_KEY

2.1171 PidTagToDoItemFlags

Canonical name: PidTagToDoItemFlags

Property ID: 0x0E2B

Data type: **PtypInteger32**, 0x0003

Area: MapiNonTransmittable

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOFLAG\]](#), [\[MS-OXOSFLD\]](#)

Alternate names: PR_TODO_ITEM_FLAGS, ptagToDoItemFlags

2.1172 PidTagTransmittableDisplayName

Canonical name: PidTagTransmittableDisplayName

Description: Contains an Address Book object's display name that is transmitted with the message.

Property ID: 0x3A20

Data type: PtypString, 0x001F

Area: Address Properties

References: [\[MS-NSPI\]](#), [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#), [\[MS-OXOABK\]](#)

Alternate names: PR_TRANSMITABLE_DISPLAY_NAME, PR_TRANSMITABLE_DISPLAY_NAME_A, ptagTransmittableDisplayName, PR_TRANSMITABLE_DISPLAY_NAME_W

2.1173 PidTagTransportMessageHeaders

Canonical name: PidTagTransportMessageHeaders

Description: Contains transport-specific message envelope information for e-mail.

Property ID: 0x007D

Data type: PtypString, 0x001F

Area: Email

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCICAL\]](#), [\[MS-OXCMAIL\]](#), [\[MS-OXOMSG\]](#)

Alternate names: PR_TRANSPORT_MESSAGE_HEADERS, PR_TRANSPORT_MESSAGE_HEADERS_A, PR_TRANSPORT_MESSAGE_HEADERS_W

2.1174 PidTagTrustSender

Canonical name: PidTagTrustSender

Property ID: 0x0E79

Data type: PtypInteger32, 0x0003

Area: MapiNonTransmittable

References: [\[MS-OXCFXICS\]](#), [\[MS-OXCMSG\]](#)

Alternate names: PR_TRUST_SENDER, ptagTrustSender

2.1175 PidTagTtyTddPhoneNumber

Canonical name: PidTagTtyTddPhoneNumber

Description: Specifies the telephone number for the contact's text telephone (TTY) or telecommunication device for the deaf (TDD).

Property ID: 0x3A4B

Data type: PtypString, 0x001F

Area: Contact Properties

References: [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_TTYTDD_PHONE_NUMBER

2.1176 PidTagUrlCompName

Canonical name: PidTagUrlCompName

Property ID: 0x10F3

Data type: PtypString, 0x001F

Area: General Message Properties

References: [\[MS-OXCMSG\]](#), [\[MS-OXTNEF\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_URL_COMP_NAME, PR_URL_COMP_NAME_A, PR_URL_COMP_NAME_W, ptagURLCompName

2.1177 PidTagUrlCompNameSet

Canonical name: PidTagUrlCompNameSet

Property ID: 0x0E62

Data type: PtypBoolean, 0x000B

Area: ID Properties

References: [\[MS-OXCMSG\]](#)

Alternate names: ptagURLCompNameSet

2.1178 PidTagUrlName

Canonical name: PidTagUrlName

Description: Contains the URL of an object.

Property ID: 0x6707

Data type: PtypString, 0x001F

Area: ExchangeAdministrative Property set

References: [\[MS-XWDCAL\]](#), [\[MS-XWDDOC\]](#), [\[MS-XWDEXT\]](#), [\[MS-XWDMAIL\]](#)

Alternate names: PR_URL_NAME, PR_URL_NAME_A, PR_URL_NAME_W, ptagURLName, DAV:href

2.1179 PidTagUserCertificate

Canonical name: PidTagUserCertificate

Description: Contains an ASN.1 authentication certificate for a messaging user.

Property ID: 0x3A22

Data type: PtypBinary, 0x0102

Area: MapiMailUser

References: [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-XWDCNTC\]](#)

Alternate names: PR_USER_CERTIFICATE, ptagUserCertificate, urn:schemas:contacts:usercertificate

2.1180 PidTagUserEntryId

Canonical name: PidTagUserEntryId

Description: Address book EntryID of the user logged on to the public folders.

Property ID: 0x6619

Data type: PtypBinary, 0x0102

Area: ExchangeMessageStore

References: [\[MS-OXCSTOR\]](#)

Alternate names: PR_USER_ENTRYID, ptagUserEntryId

2.1181 PidTagUserX509Certificate

Canonical name: PidTagUserX509Certificate

Description: Contains a list certificates for the mail user.

Property ID: 0x3A70

Data type: PtypMultipleBinary, 0x1102

Area: MapiMailUser

References: [\[MS-OXLDAP\]](#), [\[MS-OXOAB\]](#), [\[MS-OXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#)

Alternate names: PR_USER_X509_CERTIFICATE

2.1182 PidTagViewDescriptorBinary

Canonical name: PidTagViewDescriptorBinary

Description: Contains view definitions.

Property ID: 0x7001

Data type: PtypBinary, 0x0102

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_VD_BINARY

2.1183 PidTagViewDescriptorName

Canonical name: PidTagViewDescriptorName

Property ID: 0x7006

Data type: PtypString, 0x001F

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_VD_NAME, PR_VD_NAME_W

2.1184 PidTagViewDescriptorStrings

Canonical name: PidTagViewDescriptorStrings

Description: Contains view definitions in string format.

Property ID: 0x7002

Data type: PtypString, 0x001F

Area: MessageClassDefinedTransmittable

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_VD_STRINGS, PR_VD_STRINGS_W

2.1185 PidTagViewDescriptorVersion

Canonical name: PidTagViewDescriptorVersion

Description: Contains the View Descriptor version.

Property ID: 0x7007

Data type: PtypInteger32, 0x0003

Area: Miscellaneous Properties

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_VD_VERSION

2.1186 PidTagVoiceMessageAttachmentOrder

Canonical name: PidTagVoiceMessageAttachmentOrder

Description: Contains a list of filenames for the audio file attachments that are to be played as part of a message.

Property ID: 0x6805

Data type: PtypString, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#), [\[MS-OXOUM\]](#)

Alternate names: InternalSchemaVoiceMessageAttachmentOrder

2.1187 PidTagVoiceMessageDuration

Canonical name: PidTagVoiceMessageDuration

Property ID: 0x6801

Data type: **PtypInteger32**, 0x0003

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: InternalSchemaVoiceMessageDuration

2.1188 PidTagVoiceMessageSenderName

Canonical name: PidTagVoiceMessageSenderName

Property ID: 0x6803

Data type: **PtypString**, 0x001F

Area: Unified Messaging

References: [\[MS-OXCMAIL\]](#)

Alternate names: InternalSchemaVoiceMessageSenderName

2.1189 PidTagWeddingAnniversary

Canonical name: PidTagWeddingAnniversary

Description: Contains the date of the mail user's wedding anniversary at 12:00 A.M.

Property ID: 0x3A41

Data type: **PtypTime**, 0x0040

Area: MapiMailUser

References: [\[MS-EXOABK\]](#), [\[MS-OXOCNTC\]](#), [\[MS-OXVCARD\]](#), [\[MS-XWDCNTC\]](#), [\[MS-XWDEXT\]](#)

Alternate names: PR_WEDDING_ANNIVERSARY, urn:schemas:contacts:weddinganniversary

2.1190 PidTagWlinkAddressBookEID

Canonical name: PidTagWlinkAddressBookEID

Description: Specifies the value of [PidTagEntryId](#) (section [2.761](#)) of the user that the folder belongs to.

Property ID: 0x6854

Data type: **PtypBinary**, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_ABEID PROP_TAG

2.1191 PidTagWlinkAddressBookStoreEID

Canonical name: PidTagWlinkAddressBookStoreEID

Description: Specifies the value of [PidTagStoreEntryId](#) (section [2.1149](#)) of the current user (not the owner of the folder).

Property ID: 0x6891

Data type: **PtypBinary**, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_AB_EXSTOREEID PROP_TAG

2.1192 PidTagWlinkCalendarColor

Canonical name: PidTagWlinkCalendarColor

Description: Specifies the background color of the calendar.

Property ID: 0x6853

Data type: **PtypInteger32**, 0x0003

Area: MS-OXOCFG

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_CALENDAR_COLOR PROP_TAG

2.1193 PidTagWlinkClientID

Canonical name: PidTagWlinkClientID

Description: Specifies the Client ID that allows the client to determine whether the shortcut was created on the current machine/user via an equality test.

Property ID: 0x6890

Data type: **PtypGuid**, 0x0048

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_CLIENTID PROP_TAG

2.1194 PidTagWlinkEntryId

Canonical name: PidTagWlinkEntryId

Property ID: 0x684C

Data type: **PtypBinary**, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_ENTRYID_PROP_TAG

2.1195 PidTagWlinkFlags

Canonical name: PidTagWlinkFlags

Property ID: 0x684A

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_FLAGS_PROP_TAG

2.1196 PidTagWlinkFolderType

Canonical name: PidTagWlinkFolderType

Property ID: 0x684F

Data type: PtypGuid, 0x0048

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_FOLDER_TYPE: PROP_TAG

2.1197 PidTagWlinkGroupClsid

Canonical name: PidTagWlinkGroupClsid

Property ID: 0x6850

Data type: PtypGuid, 0x0048

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_GROUP_CLSID_PROP_TAG

2.1198 PidTagWlinkGroupHeaderID

Canonical name: PidTagWlinkGroupHeaderID

Description: Specifies the ID of the **navigation shortcut** which groups other navigation shortcuts.

Property ID: 0x6842

Data type: PtypGuid, 0x0048

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WB_SF_ID PROP_TAG

2.1199 PidTagWlinkGroupName

Canonical name: PidTagWlinkGroupName

Property ID: 0x6851

Data type: **PtypString**, 0x001F

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_GROUP_NAME PROP_TAG

2.1200 PidTagWlinkOrdinal

Canonical name: PidTagWlinkOrdinal

Property ID: 0x684B

Data type: **PtypBinary**, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_ORDINAL PROP_TAG

2.1201 PidTagWlinkRecordKey

Canonical name: PidTagWlinkRecordKey

Description: Specifies the value of [PidTagRecordKey](#) (section [2.1017](#)) of the folder pointed to by the shortcut.

Property ID: 0x684D

Data type: **PtypBinary**, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_RECKEY PROP_TAG

2.1202 PidTagWlinkROGroupType

Canonical name: PidTagWlinkROGroupType

Description: Specifies the type of **group header**.

Property ID: 0x6892

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_RO_GROUP_TYPE PROP_TAG

2.1203 PidTagWlinkSaveStamp

Canonical name: PidTagWlinkSaveStamp

Description: Specifies an integer that allows a client to identify with a high probability whether the navigation shortcut was saved by the current client session.

Property ID: 0x6847

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WB_SF_TAG PROP_TAG

2.1204 PidTagWlinkSection

Canonical name: PidTagWlinkSection

Property ID: 0x6852

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_SECTION PROP_TAG

2.1205 PidTagWlinkStoreEntryId

Canonical name: PidTagWlinkStoreEntryId

Property ID: 0x684E

Data type: PtypBinary, 0x0102

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_STORE_ENTRYID PROP_TAG

2.1206 PidTagWlinkType

Canonical name: PidTagWlinkType

Property ID: 0x6849

Data type: PtypInteger32, 0x0003

Area: Configuration

References: [\[MS-OXOCFG\]](#)

Alternate names: PR_WLINK_TYPE PROP_TAG

3 Structure Examples

None.

4 Security Considerations

There are no security considerations unique to this specification.

5 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products:

- Microsoft® Office Outlook® 2003
- Microsoft® Exchange Server 2003
- Microsoft® Office Outlook® 2007
- Microsoft® Exchange Server 2007
- Microsoft® Outlook® 2010
- Microsoft® Exchange Server 2010

Exceptions, if any, are noted below. If a service pack number appears with the product version, behavior changed in that service pack. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that product does not follow the prescription.

6 Change Tracking

This section identifies changes that were made to the [MS-OXPROPS] protocol document between the May 2010 and August 2010 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type "Editorially updated."

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1.1 Glossary	56746 Added several items to the list of terms that are defined in [MS-OXGLOS].	N	Content update.
1.2.1 Normative References	55751 Moved [MS-OXGLOS] from Normative References section to Informative References section.	N	Content update.
1.2.1 Normative References	56746 Added normative references that are referred to in this document.	N	Content update.
2.457 PidNameExchangeJunkEmailMoveStamp	55562 Revised description to remove normative language.	N	Content update.
2.590 PidTagAddressBookAuthorizedSenders	57328 Changed Data type to PtypObject.	Y	Content update.

PUBLIC

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.597 PidTagAddressBookDistributionListMemberSubmitAccepted	57328 Changed Data type to PtypObject.	Y	Content update.
2.598 PidTagAddressBookDistributionListMemberSubmitRejected	57328 Changed Data type to PtypObject.	Y	Content update.
2.599 PidTagAddressBookDistributionListRejectMessagesFromDLMembers	56695 Added new property.	Y	New content added.
2.604 PidTagAddressBookHierarchicalChildDepartments	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.605 PidTagAddressBookHierarchicalDepartmentMembers	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.607 PidTagAddressBookHierarchicalParentDepartment	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.608 PidTagAddressBookHierarchicalRootDepartment	57421 Changed Data type to PtypString8.	Y	Content update.
2.609 PidTagAddressBookHierarchicalShowInDepartments	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.610 PidTagAddressBookHomeMessageDatabase	57421 Changed Data type to PtypString8.	Y	Content update.
2.612 PidTagAddressBookIsMemberOfDistributionList	57421 Changed Data type to PtypMultipleString8.	Y	Content update.
2.613 PidTagAddressBookManageDistributionList	57328 Changed Data type to PtypObject.	Y	Content update.
2.614 PidTagAddressBookManager	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.616 PidTagAddressBookMember	57421 Changed Data type to PtypMultipleString8.	Y	Content update.
2.623 PidTagAddressBookOwner	57328 Changed Data type to	Y	Content update.

PUBLIC

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	PtypEmbeddedTable.		
2.624 PidTagAddressBookOwnerBackLink	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.632 PidTagAddressBookPublicDelegates	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.633 PidTagAddressBookReports	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.640 PidTagAddressBookUnauthorizedSenders	57328 Changed Data type to PtypObject.	Y	Content update.
2.656 PidTagAttachDataObject	57328 Changed Data type to PtypObject.	Y	Content update.
2.681 PidTagAutoForwardComment	57227 Added property related text in automatically generated messages.	Y	New content added.
2.715 PidTagContainerContents	55562 Revised description to remove normative language.	N	Content update.
2.715 PidTagContainerContents	57328 Changed Data type to PtypEmbeddedTable.	Y	Content update.
2.717 PidTagContainerHierarchy	57328 Changed Data type to PtypObject.	Y	Content update.
2.735 PidTagDeferredActionMessageOriginalEntryId	56964 Added a new rules property.	Y	New content added.
2.739 PidTagDeferredSendUnits	55562 Revised the description to remove normative language.	N	Content update.
2.777 PidTagFolderAssociatedContents	57328 Changed Data type to PtypObject.	Y	Content update.
2.861	55562	N	Content

PUBLIC

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
PidTagJunkThreshold	Revised description to remove normative language.		update.
2.885 PidTagMessageAttachments	57328 Changed Data type to PtypObject.	Y	Content update.
2.895 PidTagMessageRecipients	57328 Changed Data type to PtypObject.	Y	Content update.
2.915 PidTagOfflineAddressBookContainerGuid	57421 Changed Data type to PtypString8.	Y	Content update.
2.916 PidTagOfflineAddressBookDistinguishedName	57421 Changed Data type to PtypString8.	Y	Content update.
2.972 PidTagPrimarySendAccount	55562 Revised the description to remove normative language.	N	Content update.
2.1061 PidTagRuleIds	56934 Added new property.	Y	New content added.
2.1115 PidTagSenderEntryId	55562 Revised the description to remove normative language.	N	Content update.
6 Change_Tracking	57332 Removed properties: PidLidAllAttendeesList, PidLidAutoStartWhen, PidLidSendMeetingAsIcal , PidLidSingleInvite, PidTagInternetReturnPath, PidTagOriginalAuthorName, PidTagSentMailEntryId, and PidTagSubmitFlags.	Y	Content removed.

7 Index

A

[Applicability](#) 38

C

[Change tracking](#) 399

F

[Fields - vendor-extensible](#) 39

G

[Glossary](#) 27

I

[Implementer - security considerations](#) 397

[Introduction](#) 27

N

[Normative references](#) 30

O

[Overview \(synopsis\)](#) 33

P

[Product behavior](#) 398

R

References

[normative](#) 30

[Relationship to protocols and other structures](#) 38

S

[Security - implementer considerations](#) 397


T

[Tracking changes](#) 399

V

[Vendor-extensible fields](#) 39

This is Exhibit "5" referred to in the Witness Statement of EVAN FUEST sworn by EVAN FUEST of the City of Suffern, in the State of New York, before me at the City of Toronto, in the Province of Ontario, on October 20, 2022 in accordance with O. Reg. 431/20, Administering Oath or Declaration Remotely.

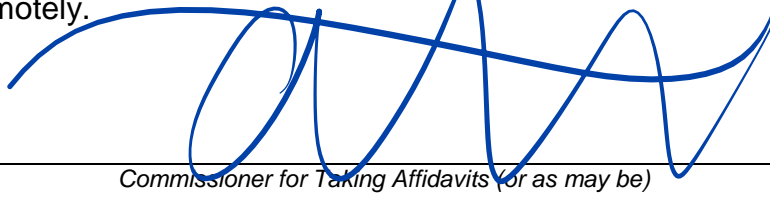

A handwritten signature in blue ink, appearing to read 'ALISA MCMASTER', is written over a horizontal line.

Commissioner for Taking Affidavits (or as may be)

ALISA MCMASTER